



RoHS Compliant

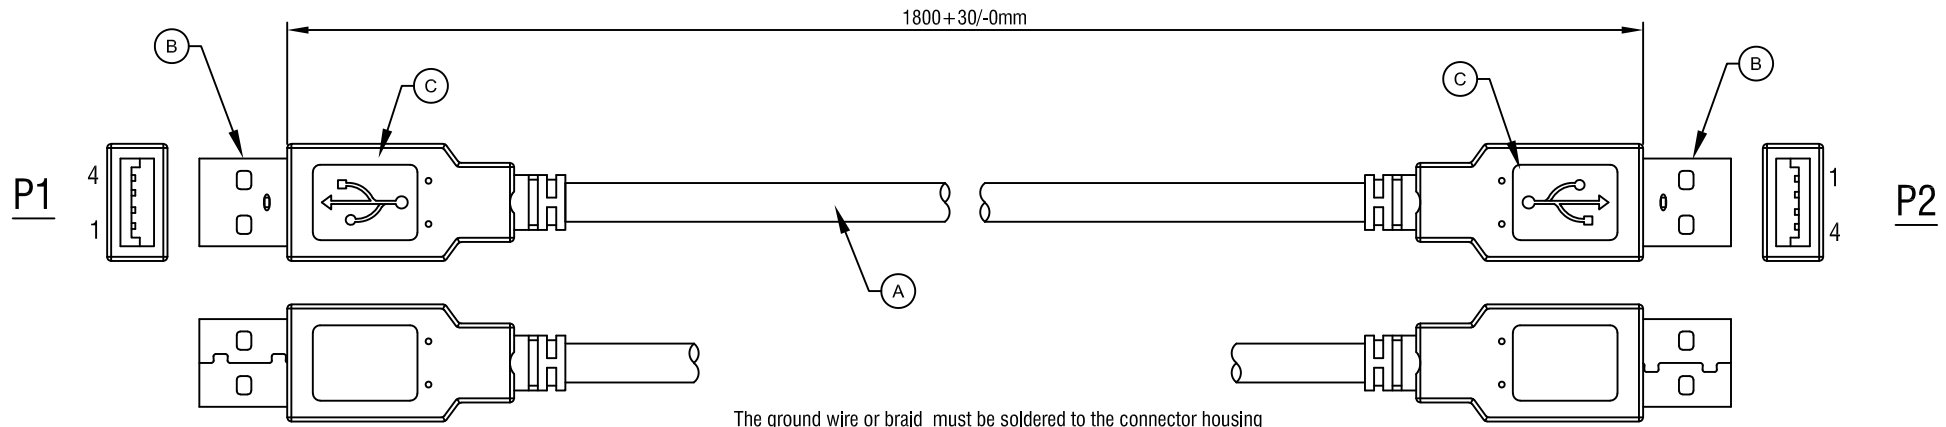

WIRE ADDRESS

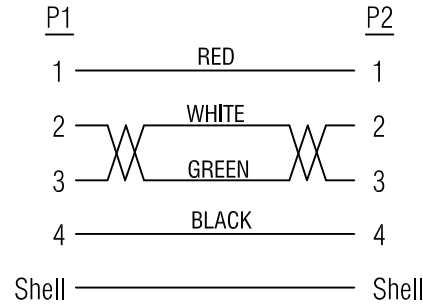

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.SUPPORT USB 2.0 480Mbps.

ROLINE USB 2.0 Cable, A - A, M/M, black, 1.8 m		SECOMP
Item	11.02.8918	
Draw	Andi Date: 2014.11.28	
Approval		
Duty	F16	

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
C	45P PVC BLACK	/	G
B	USB A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	2	PCS
A	UL2725 28AWG*1P+24AWG*2C+ADB(AM),OD=5.0mm,BLACK PVC JACKET.(BC Wire)	1	PCS