


RoHS Compliant

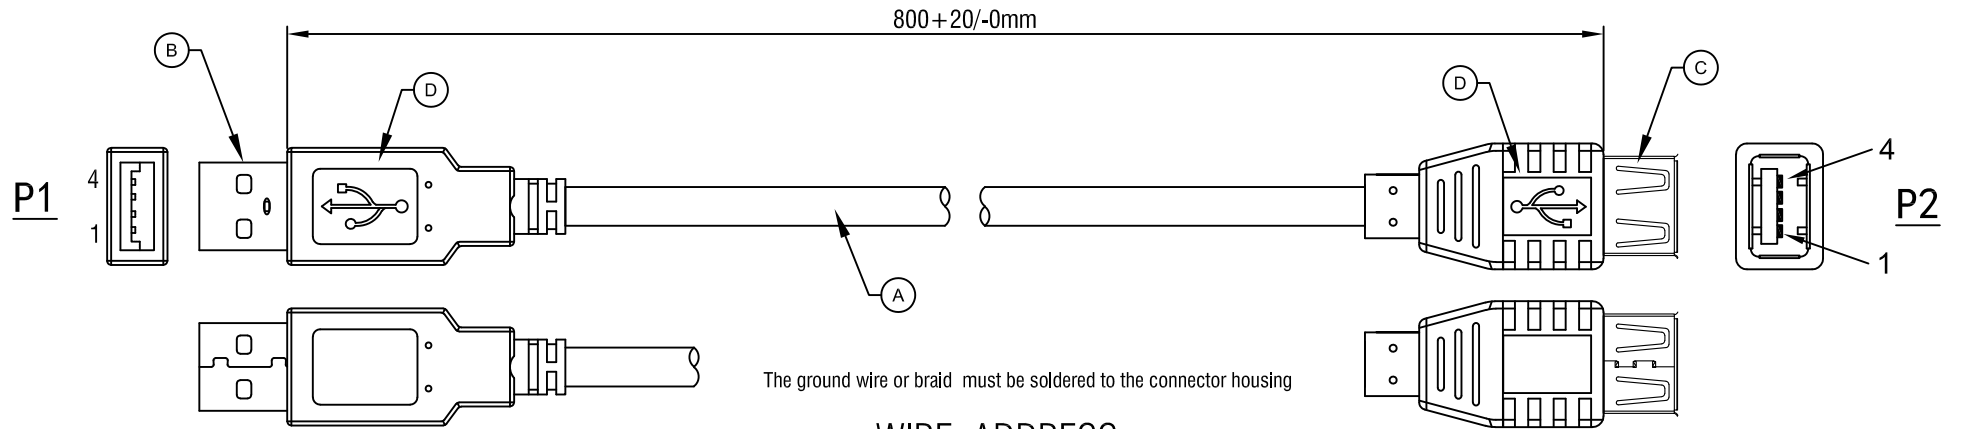

WIRE ADDRESS

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
Shell		Shell

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

D	45P PVC BLACK		G	ROLINE USB 2.0 CABLE, USB AM-AF, 15U", 0.8M		
C	USB 2.0 A FEMALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Item	11.02.8947	
B	USB 2.0 A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Draw	Sam Date: 2014.12.05	
A	UL2725 28AWG*1P+24AWG*2C+ADB,OD=5.0mm,BLACK PVC JACKET.(BC Wire)	1	PCS	Approval		
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16	
				Sample NO.	Drawings of 1/1	Proportion: 1:1 Unit(mm) A4