



Datenblatt - Fiche technique - Data sheet

11.88.5565




ROLINE GOLD HDMI High Speed Kabel, ST-ST, 5,0m

ROLINE GOLD Câble HDMI High Speed, M-M, 5,0m

ROLINE GOLD HDMI High Speed Cable, HDMI M - HDMI M, 5 m

ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
1	B	ECR # 100330-4 EDIT BAR CODE NO.	03/30/10'

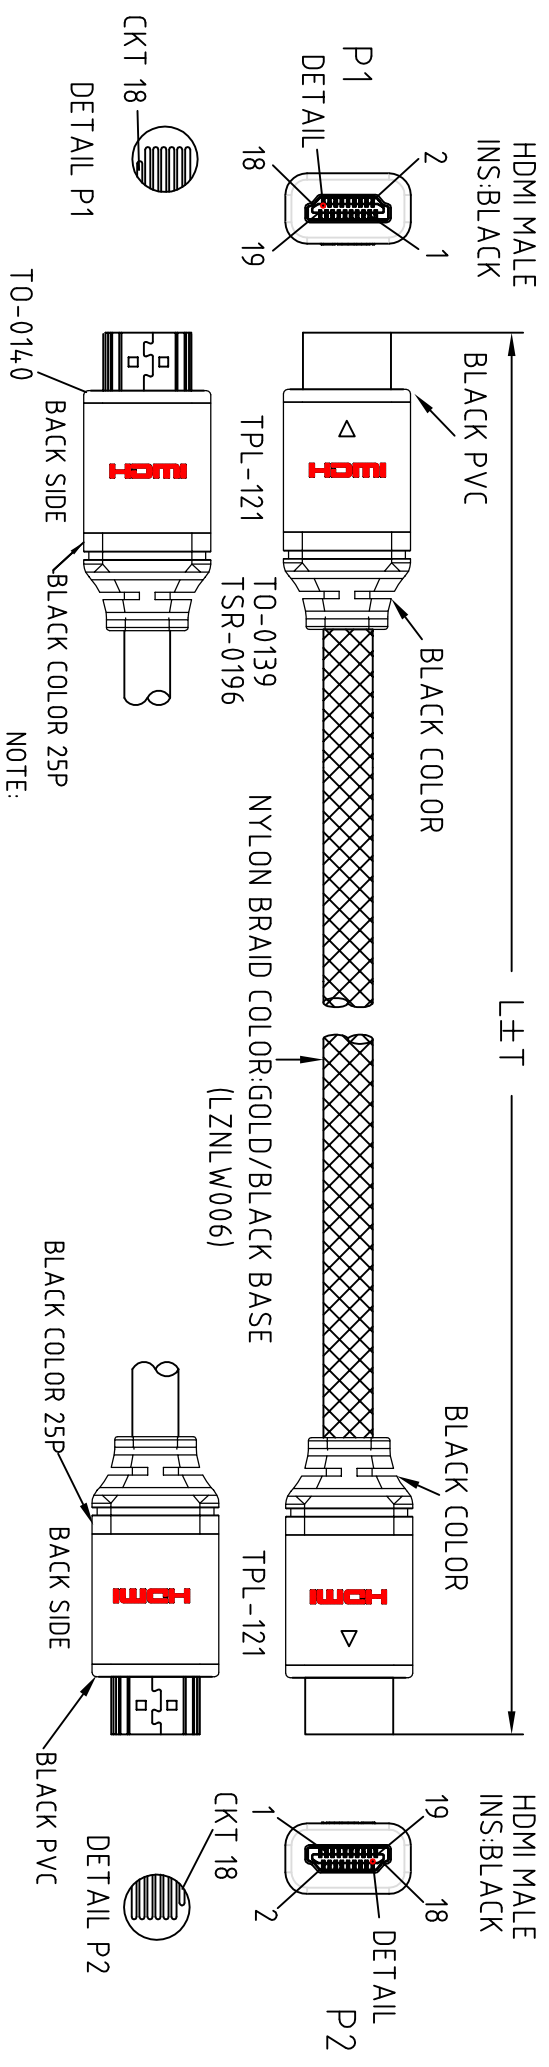

NOTE:

- CABLE: UL-20276 [28AWG/7/0.127 T.C]*1P INS:FOAM-SKIN-PE+D.W(7/0.127 T.C)+Free-Edge-Foil/[Mylar]*4C +28AWG(7/0.127 T.C)*1P INS:HD-PE+28AWG(7/0.127 T.C)*5C INS:HD-PE+AL/MY+B.D (85%)
PVC JACKET OD:6.6±0.19mm COLOR:BLACK(INK-K01).
- CONNECTOR:
P1&P2: HDMI 19P MALE W/P/CB CONTACT: 15u" ; GOLD FLASH (1.8u") SHELL.
3.SHEILD:INNER MOLD MUST BE WRAPPED COPPER 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID
4.HOOD: P1&P2:ASS'Y TYPE, ALUMINUM HOOD GOLD PLATED,
SR:MOLDED TYPE,PVC 45P,COLOR:BLACK(INK-K01) .
5.ELECTRICAL TEST:100% OPEN SHORT & MIS WIRE TEST.
CONTACT RESISTANCE 3 ohm Max .
INSULATION RESISTANCE 10M ohm Min .
HI-POT DC300V
- PACKING: EACH PC/POLYBAG+BIG HEADER CARD+BARCODE LABEL.

HDMI P1	PIN OUT	HDMI P2	CABLE FUNCTION
1		1	TMSD DATA 2+
2		2	TMSD DATA 2-
3		3	TMSD DATA 2-
4		4	TMSD DATA 2 SHIELD
5		5	TMSD DATA 1+
6		6	TMSD DATA 1-
7		7	TMSD DATA 1 SHIELD
8		8	TMSD DATA 0+
9		9	TMSD DATA 0-
10		10	TMSD DATA 0 SHIELD
11		11	TMSD CLOCK +
12		12	TMSD CLOCK -
13		13	TMSD CLOCK SHIELD
14		14	RESERVED (IN CABLE BUT N.C.ON DEVICE)
15		15	DDC CLOCK
16		16	DDC DATA
17		17	DDC/CEC GROUND
18		18	+5V POWER
19		19	HOT PLUG DETECT
SHELL		SHELL	GROUND

200-1310-4	200-1310-3	200-1310-2	200-1310-1
11.04.5565	11.04.5563	11.04.5562	11.04.5561
5000	3000	2000	1000
50	30	30	20
10	20	20	20
7611990189663	7611990189656	7611990189649	7611990189618
DWG	P/N	L (mm)	T (mm)
		PCS/CTN	BAR CODE NO.

Rotronic co., LTD.

Title: High Speed HDMI with Nylon Braid CABLE

Customer P/N: FANNIE 03/30/10'

App'd	Customer: T-RAG
Scale: NONE	Units: M/M
Dwg No. 200-1310	REV: B

Sheet: 1/1