



Datenblatt - Fiche technique - Data sheet

11.99.5502




VALUE KVM-Kabel (PS/2) für 14.99.3222/.3223, 3,0m

VALUE Câble KVM (PS/2), p. 14.99.3222/.3223, 3.0m

VALUE KVM Cable (PS/2) for 14.99.3222/.3223, black, 3.0 m

LIR	REV.	DESCRIPTION	DATE

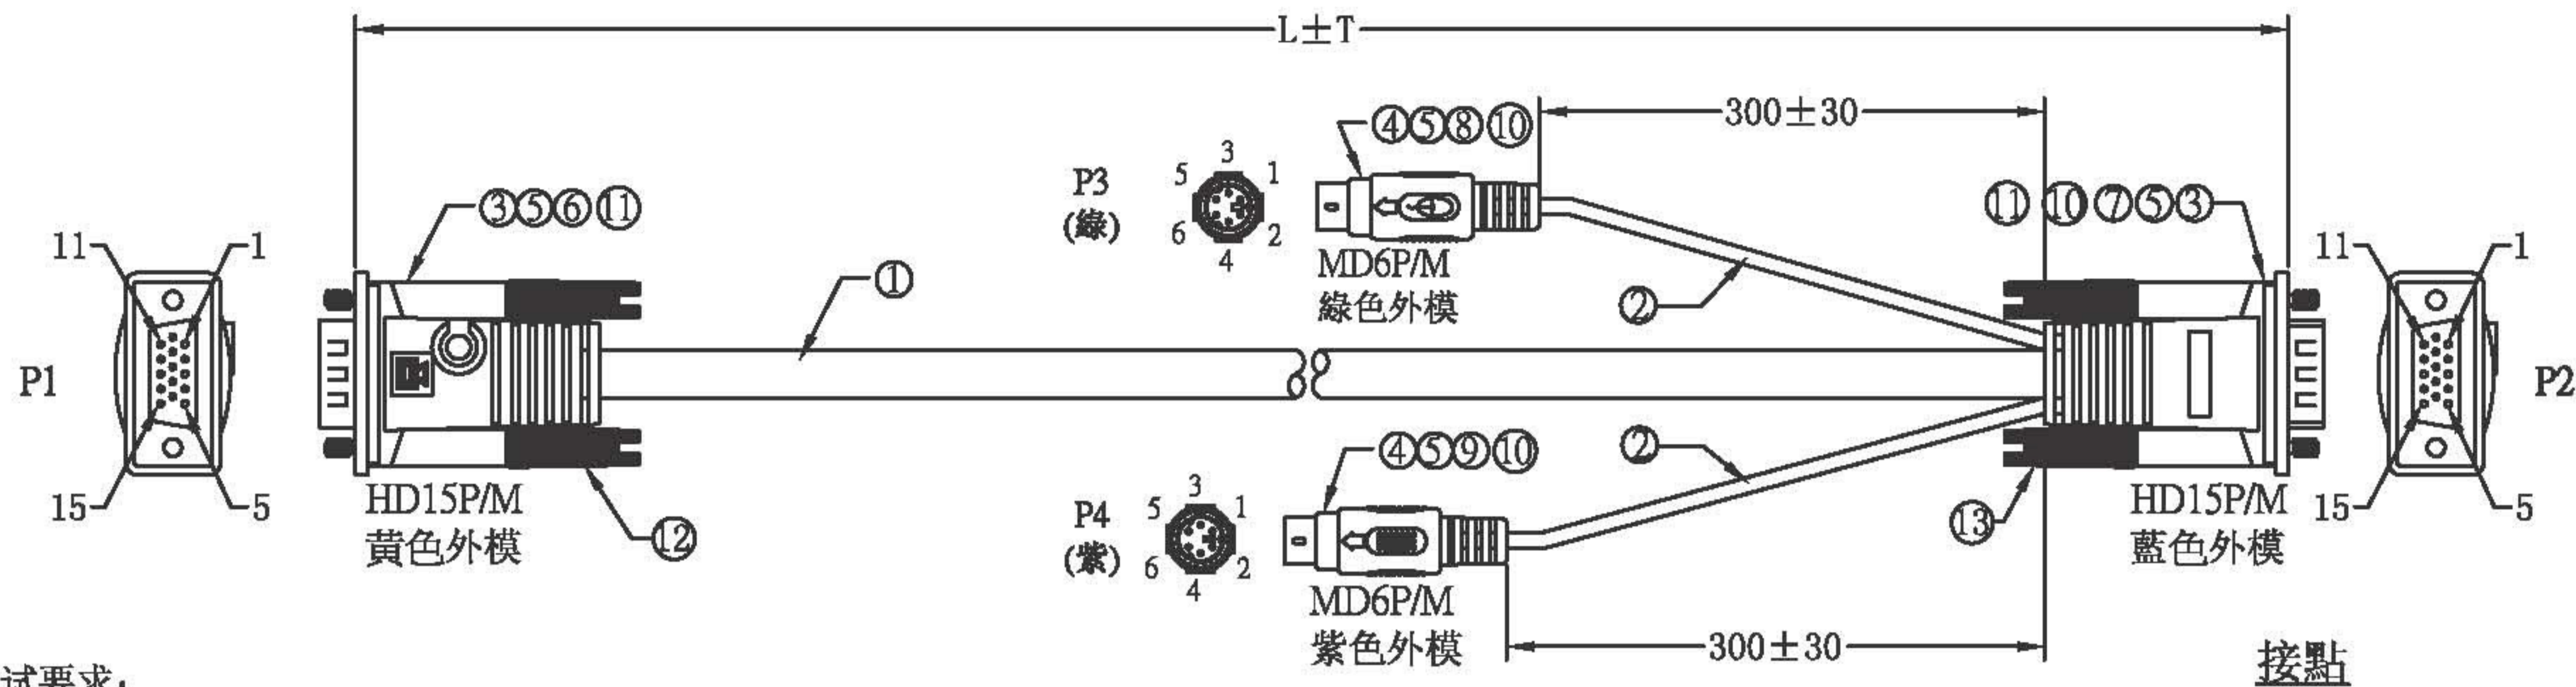

测试要求:

1. 每条线都必须100%做短断路 絕緣 誤配测试.
2. 絕緣阻抗:10兆欧 最小值.
3. 導通阻抗:5 欧姆 最大值.
4. 導通電壓:DC 300V.

ITEM NO.	L (MM)	T (MM)
CVP-030P	3000	80

Port	1	2	3	4	5	6+7+8	9	10	11	12	13	14	15	SHELL
P1														
P2						5+6+7+8 +10+11地線								
P3							3	5	1					
P4							3	4						

注:1.所有材料都需符合ROHS要求.

NO.	PART NO.	SPECIFICATION STANDARD	UNIT	QT' Y
13	CL4U40M5204	非標螺絲,4*47,鐵鍍鎳,成型藍色	PCS	2
12	CL4U40M5203	非標螺絲,4*47,鐵鍍鎳,成型黃色	PCS	2
11	CRD20T01BA02	熱縮套管,直徑1.0,黑色,L=18mm.	PCS	2
10	CRD10T01BA01	熱縮套管,直徑1.0,黑色,L=10mm.	PCS	6
9	CMPVC45PU01	PVC,45P,紫色	G	15
8	CMPVC45GR01	PVC,45P,綠色	G	15
7	CMPVC45BL01	PVC,45P,藍色	G	25
6	CMPVC45YE01	PVC,45P,黃色	G	25
5	CMLDPEWH01	LD-PE,白色內模料	G	40
4	CCMD6M001	MD6Pin 公端,黑色膠芯,殼鍍鎳,焊線式	PCS	2
3	CCDB15M001	HDB15P,公端,藍膠,殼鍍鎳,焊線式.	PCS	2
2	CNOUGB28104	NO-UL #28*4C+D+AL OD:3.0 灰黑色	MM	360
1	CU2919GB28209	UL 2919 [(#28*1C+D+AL/MY)*3COAX+#28*9C+AEB] OD:8.0 灰黑色	MM	L

Tolerance	Inch	m/m
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Drawing:
TOMMY

Check:
WAN

Approved:
OUYANG

Rotronic Co., Ltd.

Title: HD15 TO HD15*1DIN6*2-L CABLE

Third Angle Projection Item NO. 11.99.5502

Customer P/N: CVP-XXXX Customer:

Dwg No. WSP-P-U1005 Date: 2011/4/19

RoHS Scale: free Units: mm Rev. A. 0 Sheet 1/2