

**NOTE:**


- 1.Electrical properties:  
 1.ALL COMPONENTS ARE RoHS COMPLIANT.  
 2.100% OPEN AND SHORT TEST.  
 3.CONDUCTOR RESISTANCE:3 OHMS  
 4.INSULATION RESISTANCE:10 MEGOHMS.  
 5.HI-POT:DC200V/0.01S  
 6.PC TEST 1920\*1200 60HZ PASS
- 2 ROHS 2.0 and REACH

PRINTING: High Speed Cable 20276 80 C 30V VW-1

**MODEL LIST**

Model	Length	DSP
11.99.5805	1000mm	1920*1200 60Hz
11.99.5806	1500mm	1920*1200 60Hz
11.99.5807	2000mm	1920*1200 60Hz
11.99.5808	3000mm	1920*1200 60Hz
11.99.5809	5000mm	1920*1200 60Hz

**PIN ASSIGNMENT:**

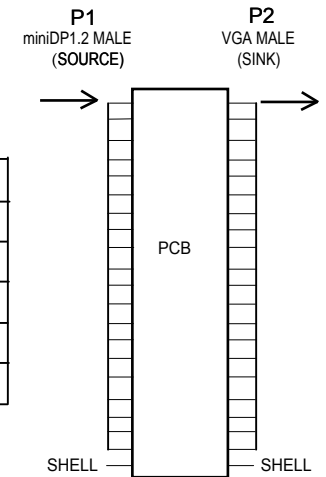

**MATERIAL LIST**

⑦	DUST COVER	PE, COLOR: TRANSPARENT	2
⑥	CABLE	(1/0.18BC*1P+1/0.18BC+AM)*5C+1/0.20BC*5C+AM+1/0.18BC+64/0.12ALMG+PVC OD: 5.0±0.2MM, COLOR:BLACK	L
⑤	OUTER MOLD	BLACK ABS	1
④	OUTER MOLD	BLACK PVC	1
③	SCREW	#4-40 UNC,HOOD MOLDED:BLACK PVC	2
②	CONNECTOR	VGA MALE, GOLD PLATED PIN, GOLD PLATED SHELL	1
①	CONNECTOR	miniDP1.2 MALE, GOLD PLATED PIN,GOLD PLATED SHELL	1
No.	PART NAME	DESCRIPTION	QTY

<b>SECOMP</b>			
NAME	VALUE Mini DisplayPort to VGA Cable,MiniDP-VGA, M/M, black		
MODEL No.	11.99.5805/11.99.5806 11.99.5807/11.99.5808 11.99.5809	MAPE	TOLERANCE X. ±1.00 X.X ±0.50
APPROVE BY	CHECK BY	DRAW BY	SCALE MM
			PAGE 1/1