



Datenblatt - Fiche technique - Data sheet



11.99.8753



VALUE USB 2.0 Kabel, Micro USB A ST - Micro USB B ST, 1,8m

VALUE Câble USB 2.0, Micro USB A mâle - Micro USB B mâle, 1,8m

VALUE USB 2.0 Cable, Micro A - Micro B, M/M, 1.8 m

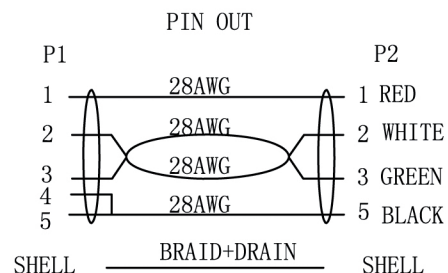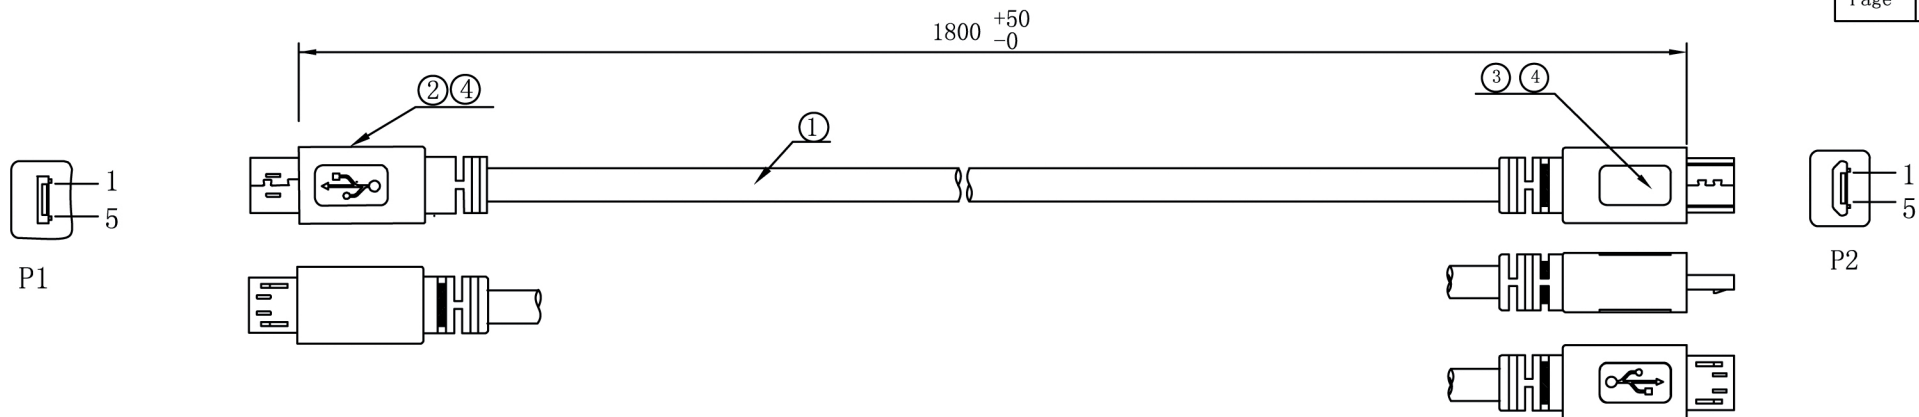

NOTE:

1. Electrical test:
 - (1). 100% open short & miss wire test;
 - (2). Insulation resistance: DC 300V 10MΩ;
 - (3). Contactor resistance: 3Ω Max;
 - (4). Dielectric strength: 100V AC/Minute, 1mA.
2. RoHS & REACH COMPLIANT
3. PRINTING: USB CABLE 28AWG×1P+28AWG×2C

MATERIAL LIST:

④	OUTER MOLD	Color For White	2	
③	USB B TYPE	MICRO USB B/M Solder Type, Black PBT Insulation The Pin Gold Plating, the shell for Nickel Plating	1	
②	USB A TYPE	MICRO USB A/M Solder Type, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating	1	
①	CABLE	USB 2.0 28AWG (7/0.12BC)*1P+28AWG (7/0.12BC+PVC)*2C+AL-FOIL+DRAIN (7/0.12BC)+BRAID (16/3/0.12AL-MG) PVC JACKET COLOR: White OD4.0±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

Rotronic Co., Ltd.				
CUSTOMER		ITEM NO.		11.99.8753
PRODUCT NAME		USB2.0 MICRO AM TO MICRO BM	UNIT	MM
DRAWNBY		CHECKBY	APPOBY	DATE
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
				2011-09-13