



Datenblatt - Fiche technique - Data sheet

12.99.3000




VALUE USB Adapter Set, 9teilig

VALUE Set d'adaptateurs USB, 9 pièces

VALUE USB Adapter Set

ROHS-COMPLIANT

LTR	REV	DESCRIPTION	DATE
Δ*2	E	ECR # 061227-7 EDIT PACKING,DEL CABLE SUPPLIER	01/03/07'
Δ*3	F	ECR # 071217-11 EDIT PACKING,USB OVERLOAD PROTECTOR	12/17/07'

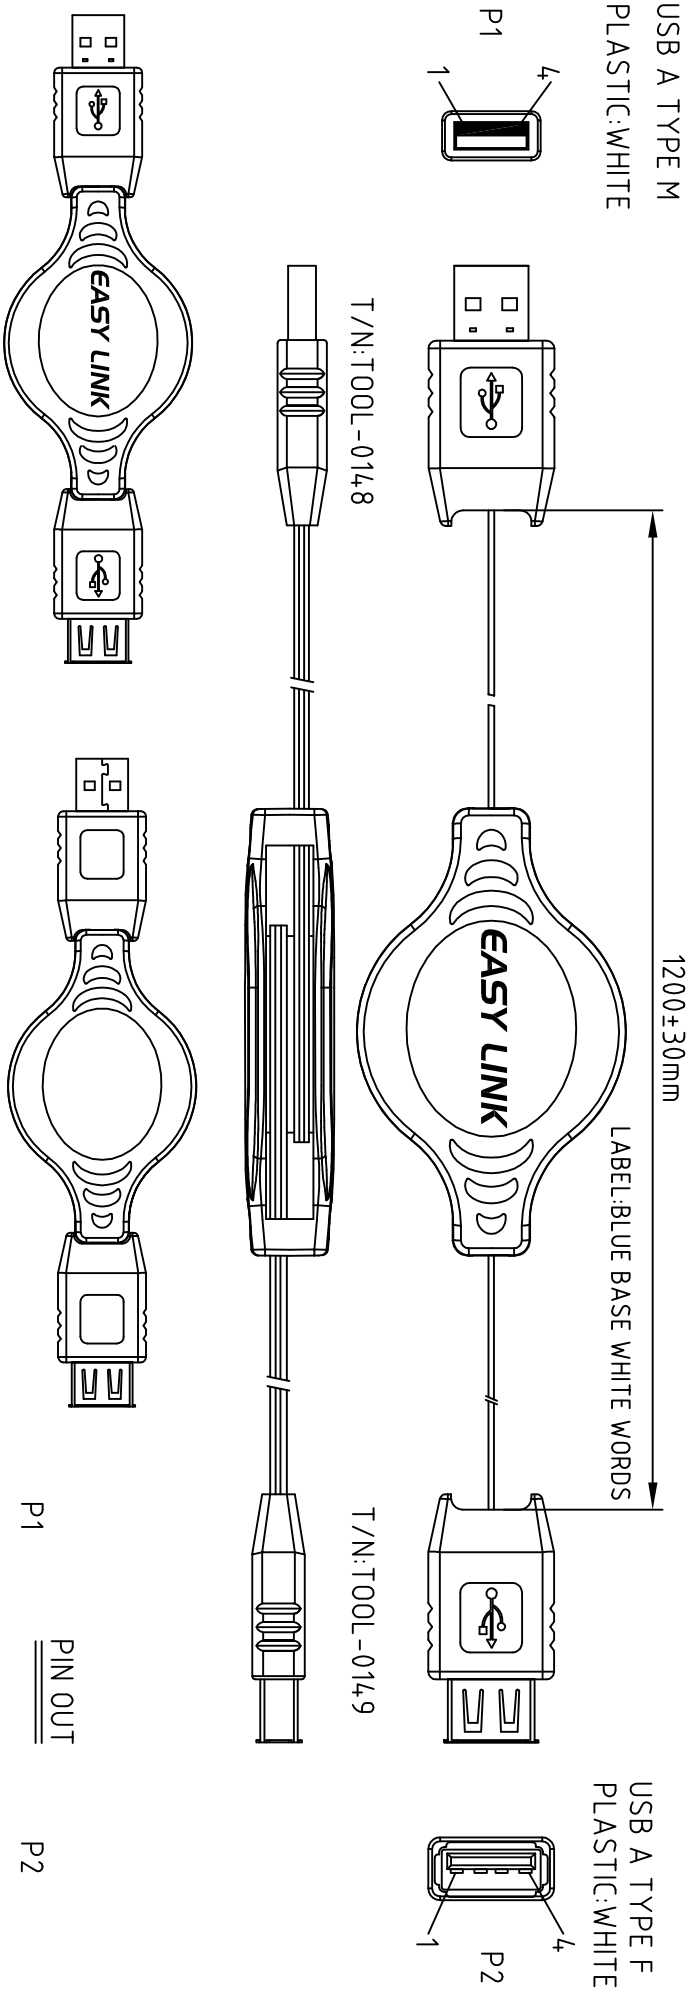

NOTE:

1. CABLE: [32AWG(19/0.05)x1P T.C+NYLON 150D,INS:HD-PE]x1F+[30AWG(10/0.08)x1C T.C+NYLON 150D,

INS:HD-PE]x2F, PVC JACKET COLOR:BLACK(NK-K01),OD:1.0x3.0±0.15mm(USB 2.0)

2.CONNECTOR: P1:USB A TYPE M SHORT TYPE CONTACT:G/F,SHELL:NI-PLATED

P2: USB A TYPE F CONTACT:G/F,SHELL:NI-PLATED

3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)

4.RETRACTABLE HOOD: ASS'Y TYPE, COLOR:BLACK(NK-K01)

5.TEST REQUEST: <1>.100% OPEN SHORT & MIS WIRE TEST

<2>.CONTACT RESISTANCE 3 ohm MAX

<3>.INSULATION RESISTANCE 20M ohm MIN

6.PACKING:EACH PC / BLISTER + BACK CARD(SEE 5/5), 10 PCS/CARTON

1PC USB A/M TO B/M & USB A/M TO A/M & USB A/M -MINI USB 5P &

USB A/M-HIROSE 4P & USB A/M-MITSUMI 4P ADAPTER & USB A/F-MD6M ADAPTER &


USB A/M-DC PLUG & USB A/M-A/F OVERLOAD PROTECTOR(SEE PAGE 4/6)

Tolerance Inch M/M										Rotronic CO., LTD.														
.X					.015 .30																			
.XX					.010 .10																			
.XXX					.005 .05																			
Draw																								
FANNIE 12/17/07'										Title														
										USB A/M - A/F RETRACTABLE CABLE(COMBO PACK)														
Check										Customer P/N 12.99.3000														
										App'd					Customer T-RAG									
										Scale		NONE			Units		M/M		Third Angle Projection					
Engr										Dwg No. 170-2051					Rev. F			Sheet. 1/6						

LTR	REV.	DESCRIPTION	DATE
A *2	E	ECR # 061227-7 EDIT PACKING DEL CABLE SUPPLIER	01/03/07'
A *3	F	ECR # 071217-11 EDIT PACKING;USB OVERLOAD PROTECTOR	12/17/07'

USB A/M
PLASTIC:WHITE


USB B/M
PLASTIC:WHITE

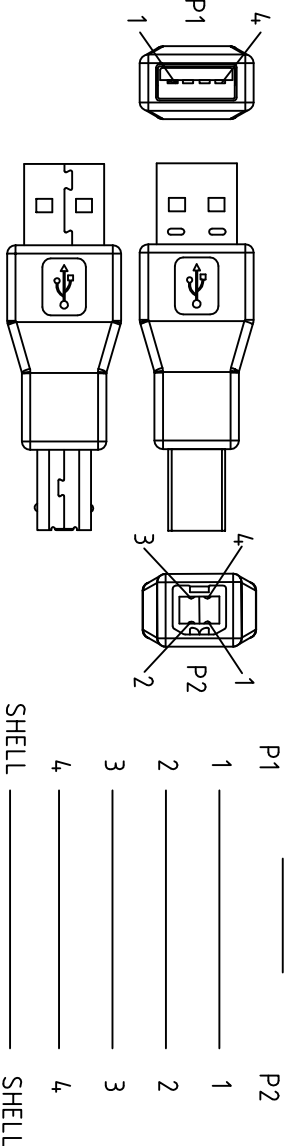

USB A/M - B/M ADAPTOR (BLACK)


USB A MALE
PLASTIC:WHITE

USB A MALE
PLASTIC:WHITE

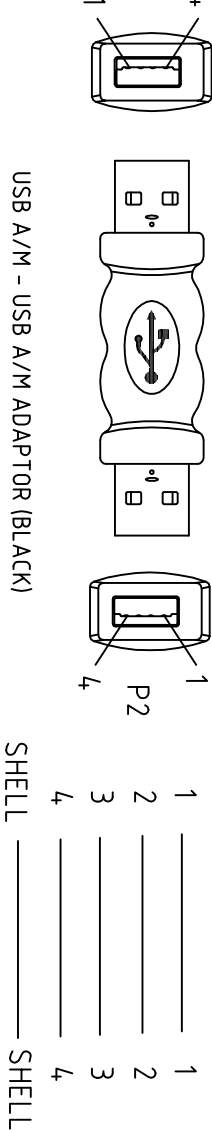

USB A/M
PLASTIC:WHITE


MINI USB 5P/M
PLASTIC:BLACK

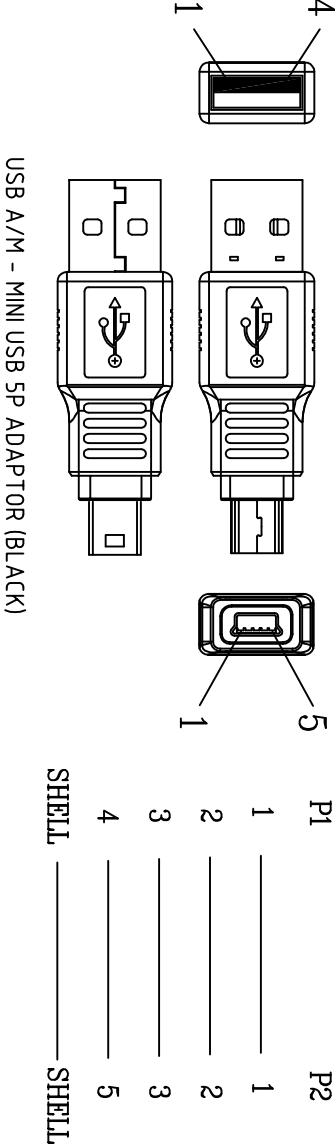


USB A/M - MINI USB 5P ADAPTOR (BLACK)

USB A/M
PLASTIC:WHITE

MINI USB HIROSE 4P MALE
PLASTIC:BLACK

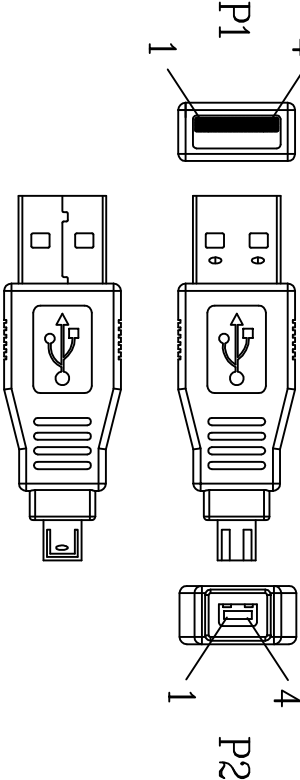

USB A/M - HIROSE 4P ADAPTOR(BLACK)

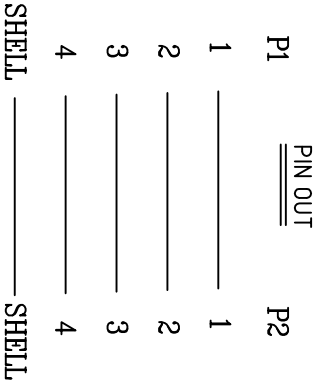


Tolerance Inch M/M			
X	.015	.30	
.XX	.010	.10	
XXX	.005	.05	
Title			
ADAPTERS			
Customer P/N 12.99.3000			
App'd			
Scale NONE Units M/M Third Angle Projection			
Dwg No. 170-2051 Rev:F Sheet.2/6			

Rotronic CO., LTD.

LTR	REV.	DESCRIPTION	DATE
	E	ECR # 061227-7 EDIT PACKING,DEL. CABLE SUPPLIER	01/03/07'
	F	ECR # 071217-11 EDIT PACKING,USB OVERLOAD PROTECTOR	12/17/07'

USB A/M
PLASTIC:WHITE


MINI USB MITSUMI 4P MALE
PLASTIC:BLACK

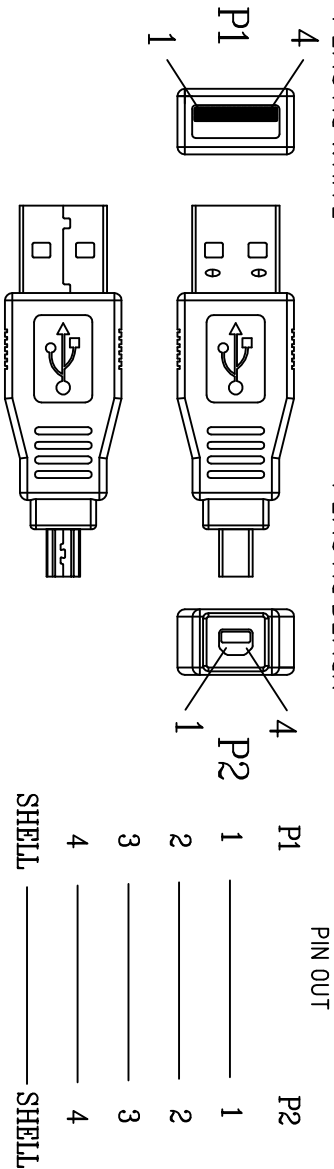

USB A/M - MITSUMI 4P ADAPTOR(BLACK)

MD 6 MALE
PLASTIC: BLACK


USB A FEMALE
PLASTIC: WHITE

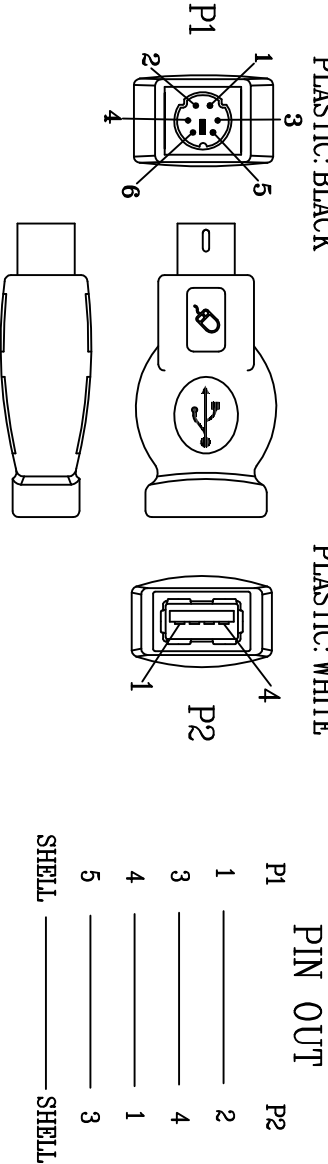

MD6/M-USB A/F ADAPTOR(BLACK)

USB A TYPE MALE
PLASTIC: WHITE

DC PLUG Ø3.5x1.1

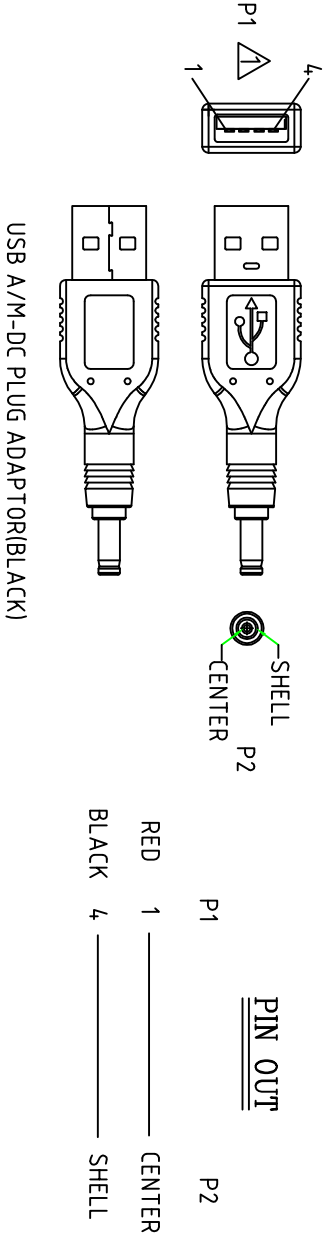




USB A/M-DC PLUG ADAPTOR(BLACK)

Tolerance Inch M/M		Rotronic CO., LTD.			
.X	.015 .30				
.XX	.010 .10				
.XXX	.005 .05				
Draw	Title				
FAANIE 12/17/07'	ADAPTERS				
Chck	Customer P/N		12.99.3000		
	App'd	Customer T-RAG			
Engr	Scale	NONE	Units	M/M	Third Angle Projection
	Dwg No.	170-2051	Rev.	F	Sheet.3/6




Characteristic;

1. This item can execute the overload protection function for USB power. When USB Host power is over 5V/500mA, it will enter the protection mode status. When it over 5V/1A, it will cut off the USB Host power so as to protect the USB device from being burned down.

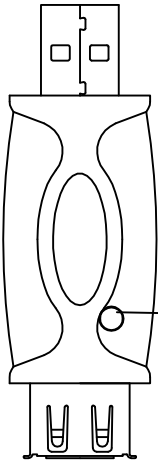

USB A TYPE / MALE

USB A TYPE / FEMALE

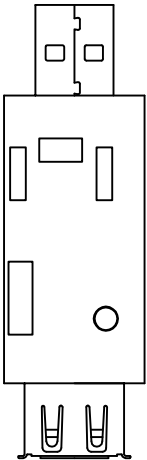

2. When the short circuit occurs or the reverse power will pass through the host side, it will also protect the host side and protect it from being burned out.
3. 1 up & 1 down power protection.
4. When the red LED is on, it means the device is under normal operating condition. When the the LED goes off, it is under the overload protection status.
- USB device from being burned out.
5. Replug in the overload protection device and then the function will recover again.
6. color:BLACK(NK-K01)
- PCB:USB-911-V1.2

LTR	REV.	DESCRIPTION	DATE
A*2	E	ECR # 061227-7 EDIT PACKING,DEL CABLE SUPPLIER	01/03/07'
A*3	F	ECR # 071217-11 EDIT PACKING,USB OVERLOAD PROTECTOR	12/17/07'

PLASTIC:WHITE



RED LED

PLASTIC:WHITE

360-0062-2

Tolerance Inch M/M			Rotronic CO., LTD.			
X	.015	.30				
.XX	.010	.10				
.XXX	.005	.05				
Draw						
FFANNIE 12/17/07'			Title			
			USB A/M - A/F RETRACTABLE CABLE(COMBO PACK)			
Customer P/N 12.99.3000						
App'd		Customer		T-RAG		
Chek						
Engr						

LTR	REV.	DESCRIPTION	DATE
4*2	E	ECR # 061227-7 EDIT PACKING,DEL.CABLE SUPPLIER	01/03/07'
5*3	F	ECR # 071217-11 EDIT PACKING,USB OVERLOAD PROTECTOR	12/17/07'

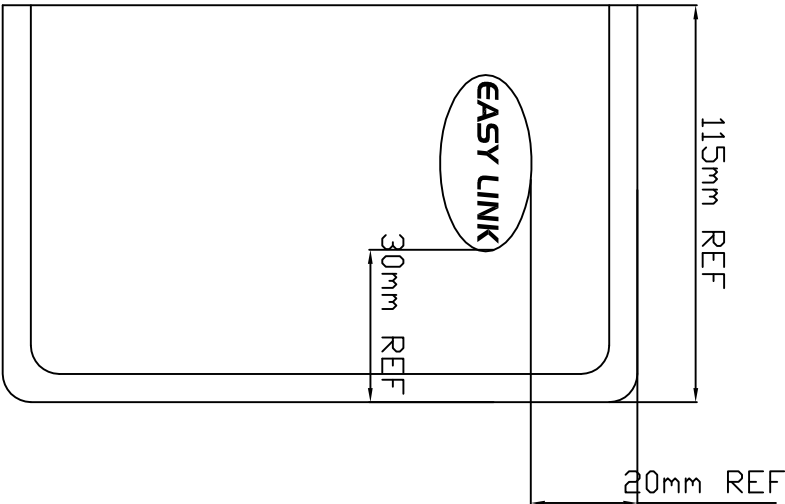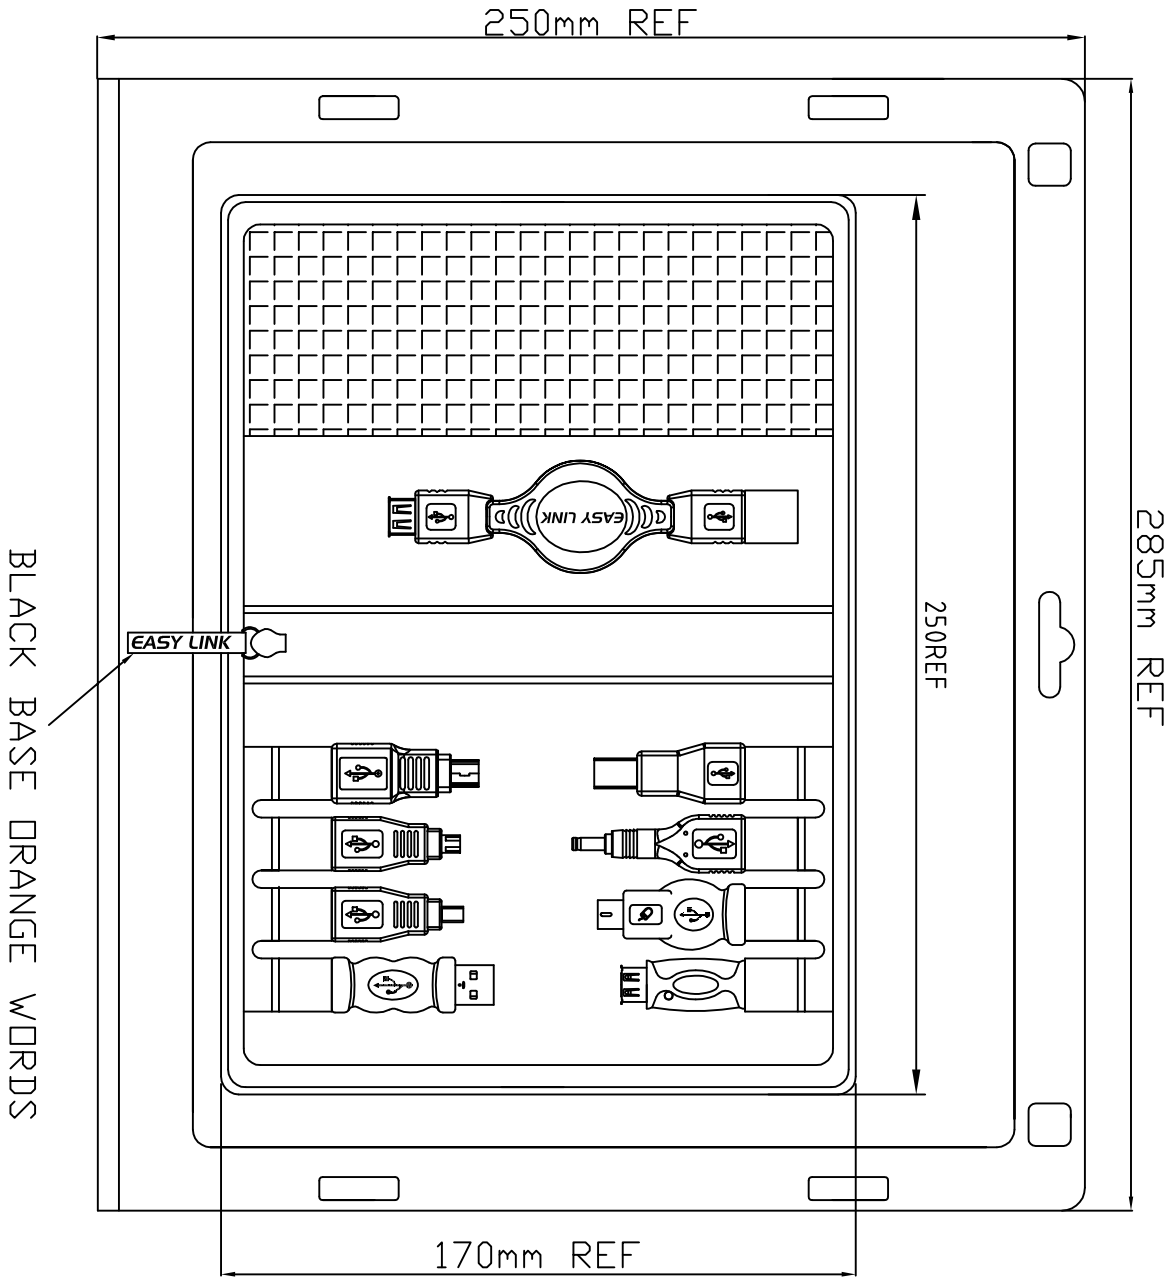

Tolerance Inch M/M			
X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
Draw			
FANNIE 12/17/07'			
Customer P/N 12.99.3000			
Title			
PACKING SPEC			
App'd			
Customer T-RAG			
Scale			
NONE Units M/M Third Angle Projection			
Engr			
Dwg No. 170-2051 Rev:F Sheet 5/6			

Rotronic CO., LTD.



BACK CARD



LTR	REV.	DESCRIPTION	DATE
	2	ECR # 061227-7 EDIT PACKING, DEL. CABLE SUPPLIER	01/03/07'
	3	ECR # 071217-11 EDIT PACKING, USB OVERLOAD PROTECTOR	12/17/07'

NO FRAME

Tolerance Inch M/M			
X	.015	.30	
XX	.010	.10	
XXX	.005	.05	
Title			
USB A/M - A/F RETRACTABLE CABLE(COMBO PACK)			
FANNIE 12/17/07'			
Customer P/N		12.99.3000	
App'd		Customer T-RAG	
Scale	NONE	Units	M/M
Dwg No. 170-2051		Rev. F	Third Angle Projection
Engr		Sheet. 6/6	