



Anwendung/Application :

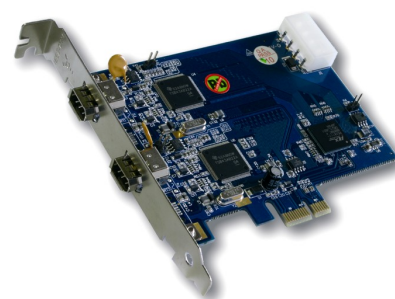

Operating System (OS):

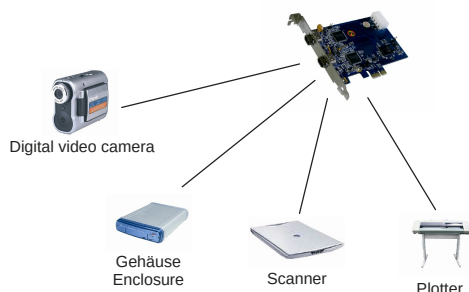

Geprüft/Approved:



Verpackung/Packing:



„Dual Chip“ FireWire 1394A PCI-Express Karte mit 2 Ports

Beschreibung :	Die EX-16502E Dual PCI-Express FireWire 1394A (FireWire400) Karte stellt zwei externe FireWire 1394A Port zur Verfügung. Jeder Port hat einen eigenen Texas Instruments Singel Chip. Somit erreicht jeder Port eine volle Datenübertragung von bis 400 Megabit pro Sekunde. Sie ist entwickelt worden um zwei weitere FireWire 1394A Highspeeds Ports für PCs, kleine Workstations oder Server über den PCI Express Bus zu erweitern um FireWire 400 1394A Geräte anzuschließen.
Merkmale :	- Unterstützt bis zu 63 Geräte - Unterstützt 12V DC über den 6 Pin IEEE 1394 Stecker - PCI Express Schnittstelle kompatibel zu 1.0a Spezifikation „Hot swapping“ Geräte können ohne den Computer auszuschalten eingesteckt und ausgezogen werden - Kann auch zusätzlich zu den FireWire Ports vom Motherboard installiert werden - Unterstützt PC und Apple Power MAC Systeme
Chip-Set :	Texas Instruments IEEE1394a
Datentransfer-Rate :	- FireWire 1394A: 400Mbps - PCI-Express: Bis zu 2.5Gb/Sek. (250MB/Sek.) PCI Express Burst Rate
Anschlüsse :	2 x 6 Pin FireWire 1394A Buchse extern 5/12V Power Stecker für den Stromanschluss vom Gehäuse Netzteil
Arbeitstemperatur : Luftfeuchtigkeit :	0 bis 55°C 5 bis 95%
Hardwaresysteme :	PCI-Express x1 bis x16
Abmessung / Gewicht :	120 x 67 mm / 120g
Lieferumfang :	EX-16502E, Treiber CD, Handbuch

„Dual Chip“ FireWire 1394A PCI-Express card with 2 ports

Description:	The EX-16502E Dual PCI Express IEEE1394a (FireWire400) card provides a reliable solution for PC computers to connect to IEEE1394a (FireWire400) peripherals. The PCI Express to PCI local bus translation bridge takes advantages of the 2.5 Gb/s burst rate of 1-lane PCI Express bus and the PCI bus interface is connected to two OHCI 1.1 Compliant IEEE 1394a Single Chip Host Controller (TSB43AB22A). This solution provides full PCI Express and dual 1394a functionality and performance. The EX-16502E supports up to 63 IEEE 1394a FireWire400 devices, including digital video camcorders and high-resolution colour printers. The EX-16502E provides a true high performance I/O solution for users are demanding the IEEE1394a consumer and professional devices. The EX-16502E provides a true high performance I/O solution for users are demanding the IEEE1394a consumer and professional devices.
Feature :	- Support up to 63 device - Support 12V DC from the 6 pin IEEE 1394 connector - Fully Compliant with PCI Express Base Specifications, Revision 1.0a “Hot swapping” to connect/disconnect devices without turning off the computer - Can install to existing FireWire ports from the Motherboard - Support PC and Apple Power MAC Systems
Chip-Set :	Texas Instruments IEEE1394a
Data transfer rate :	- FireWire 1394A: 400Mbps - PCI-Express: Up to 2.5Gb/Sec. (250MB/Sec.) PCI Express Burst Rate
Connectors :	3 x External 6 pin FireWire1394A female 5/12V Power connector for take the power from the power supply of computer case
Operating Temperature : Operating Humidity :	0 up to 55°C 5 up to 95%
Hardware system :	PCI Express x1 to x16
Size / Weight :	120 x 67 mm / 120g
Packaging contents :	EX-16502E, Driver CD, Manual