

# PRODUCT DATASHEET

## SST PAR 16 50 36° 4.6 W/827 GU10

LED SUPERSTAR PAR16 | Dimmable LED reflector lamps PAR16 with retrofit pin base



---

### AREAS OF APPLICATION

- Shops
- Hospitality
- Museums, art galleries
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Spotlighting for accents
- Display cabinets and shop windows
- Spotlighting heat-sensitive objects such as food, plants, etc.
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- Low energy consumption
- High color consistency thanks to narrow binning
- Easy replacement of halogen lamps due to compact full glass design and single optic
- Ideal for economical spotlighting

---

### PRODUCT FEATURES

- LED alternative to conventional high voltage lamps
- Good quality of light; color rendering index  $R_a: \geq 80$
- High color consistency:  $\leq 5$  SDCM
- Dimmable (with many common dimmers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim))
- Made in Germany (versions up to incl. 50 W)
- Mercury-free lamps



**TECHNICAL DATA**

## Electrical data

<b>Rated wattage</b>	4.60 W
<b>Nominal wattage</b>	4.60 W
<b>Nominal voltage</b>	220...240 V
<b>Claimed equiv. conventional lamp power</b>	50 W
<b>Operating frequency</b>	50...60 Hz
<b>Power factor <math>\lambda</math></b>	> 0.80

## Photometrical data

<b>Luminous intensity</b>	850 cd
<b>Nominal luminous flux</b>	350 lm
<b>Rated luminous flux</b>	350 lm
<b>Rated color temperature</b>	2700 K
<b>Color rendering index Ra</b>	$\geq 80$
<b>Lumen main.fact.at end of nom.life time</b>	0.70
<b>Light color (designation)</b>	Warm White
<b>Standard deviation of color matching</b>	$\leq 5$ sdcn
<b>Nominal useful luminous flux 90°</b>	350 lm
<b>Rated useful luminous flux 90°</b>	350 lm
<b>Rated peak intensity</b>	850 cd

## — Light technical data

<b>Beam angle</b>	36 °
<b>Warm-up time (60 %)</b>	< 0.50 s
<b>Starting time</b>	< 0.5 s
<b>Nominal beam angle</b>	36 °
<b>Rated beam angle (half peak value)</b>	36.00 °

### Dimensions & weight



<b>Overall length</b>	55.0 mm
<b>Diameter</b>	51.0 mm
<b>Outer bulb</b>	PAR51
<b>Length</b>	55.0 mm
<b>Maximum diameter</b>	51.0 mm

### Lifespan

<b>Nominal lamp life time</b>	25000 h
<b>Rated lamp life time</b>	25000 h
<b>Number of switching cycles</b>	100000

### Additional product data

<b>Base (standard designation)</b>	GU10
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Show WEEE picto</b>	Yes
<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

<b>Dimmable</b>	Yes <sup>1)</sup>
-----------------	-------------------

<sup>1)</sup> With many common dimmers


### Certificates & standards

<b>Energy efficiency class</b>	A+
<b>Energy consumption</b>	5 kWh/1000h

Country specific categorizations

<b>ILCOS</b>	DRPAR-4,6/827-220-240-GU10-50/36
<b>Order reference</b>	LPAR16D5036S4,6

Light Distribution

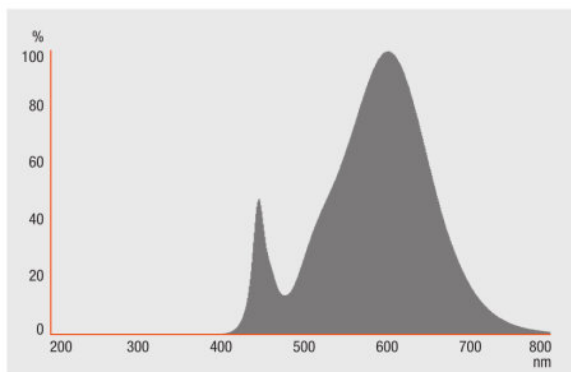

Spectral power distribution

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899390171	SST PAR 16 50 36° 4.6 W/827 GU10	Shipping carton box 10	290 mm x 254 mm x 134 mm	9.87 dm <sup>3</sup>	724.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For dimming conformity see

- ▶ [www.ledvance.com/dim](http://www.ledvance.com/dim)

For further products and actual information concerning LED lamps see

- ▶ [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)

For Guarantee see

- ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.