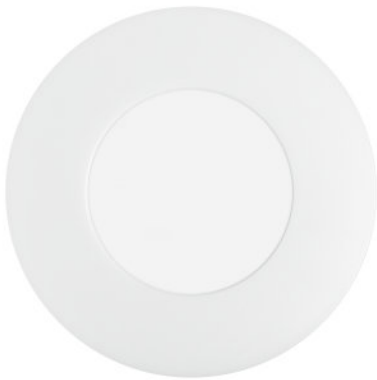# PRODUCT DATASHEET
LED Ring

Slim design | Slim LED luminaires with LED module

AREAS OF APPLICATION

– Indoor applications
– Corridors, entrance areas, stairwells, living rooms, basements
– Kitchens, workspaces

PRODUCT BENEFITS

– Very slim design
– Energy savings of up to 80 % compared to luminaires using conventional lamps
– Easy and quick installation

PRODUCT FEATURES

– Ceiling luminaire with advanced LED technology
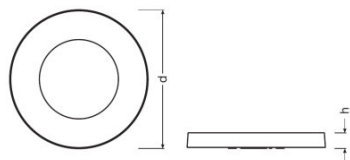– Circular light emission

TECHNICAL DATA

Electrical data

Nominal wattage	18.00 W
Nominal voltage	220…240 V
Mains frequency	50/60 Hz

Photometrical data

Color temperature	2700 K
Light color (designation)	Warm White
Color rendering index Ra	80

Dimensions & weight

Diameter	280.0 mm
Height	29.0 mm
Product weight	400.00 g

Colors & materials

Body material	Polycarbonate (PC)
Product color	Gray/White
Cover material	Polycarbonate (PC)

Capabilities

Dimmable	No

Certificates & standards

Protection class	II
Type of protection	IP20

EQUIPMENT / ACCESSORIES

– Complete mounting and connecting accessories included

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899948273	LED Ring	Folding carton box 1	- x - x -		
4052899948303	LED Ring	Shipping carton box 10	380 mm x 302 mm x 315 mm	36.15 dm³	4939.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

—