




Datenblatt - Fiche technique - Data sheet

**21.15.0961**


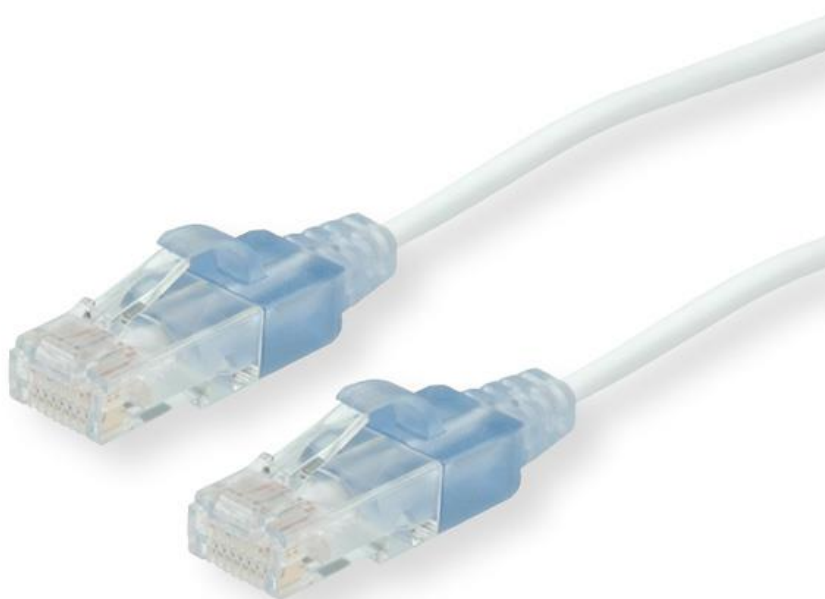


ROLINE UTP-Patchkabel Kat.6, slim, weiss, 1,0 m

Cordon ROLINE Cat.6 UTP, slim, blanc, 1,0 m




ROLINE UTP Patch Cord, Cat.6, slim, white, 1.0 m

10	11	12	13
DATE	REV.	REVISION	DRAFTING
2016.8.17	A0	NEW	LM
			CHECKED
			JZY

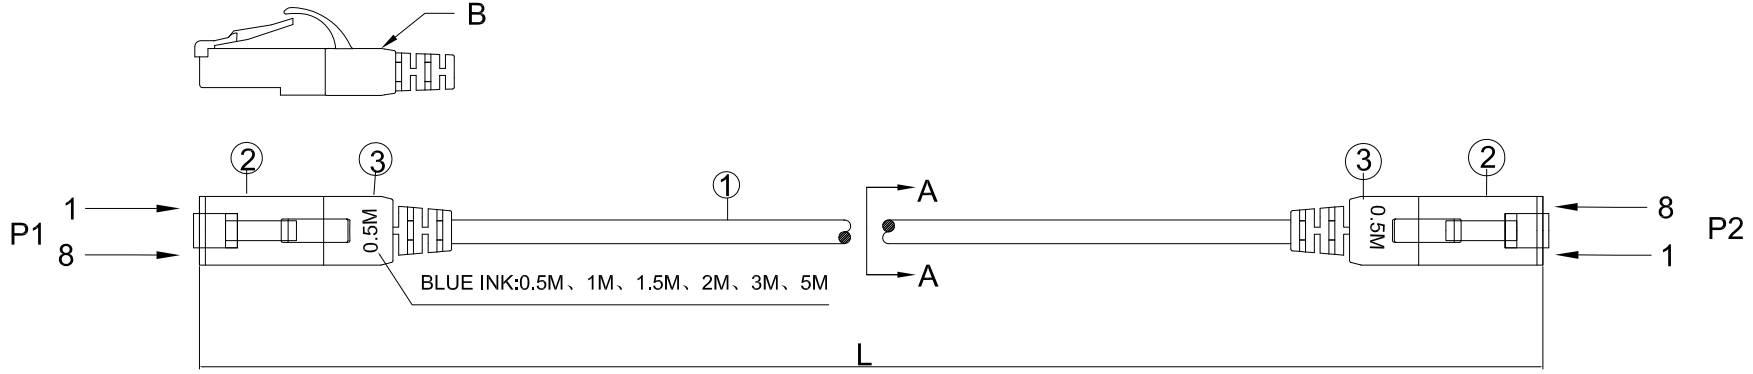

INK MARKING: roline CAT.6 UTP PATCH CONFORMS TO ANSI/TIA-568-C.2 & ISO/IEC 11801 30AWGX4P

Item No.	Length	Tolerance
21.15.0960	0.5m	20mm
21.15.0961	1m	20mm
21.15.0964	1.5m	30mm
21.15.0962	2m	30mm
21.15.0963	3m	30mm
21.15.0965	5m	80mm

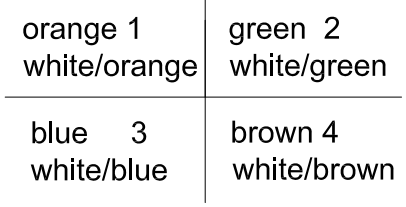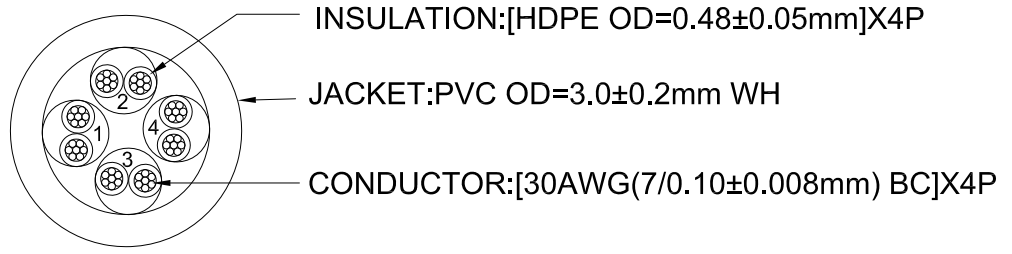

Minimum Bending Radius : ≥25 mm



③	BOOT	PVC Transparent Blue	2	Unless specified on the drawing, tolerances are per the follows: X. ±0.20 X° ±3 .X ±0.10 .X° ±0.3 .XX ±0.05	DRAW. NO		TITLE	ROLINE UTP Patch Cord Cat6, slim, White		
②	PLUG	8P8C 50U RJ45	2		CUSTOMER		DRAW	LM	DATE	2016.08.17
①	CABLE	CAT.6 PVC 30AWG*4P WH	1		CUST' R P/N		CHECK	JZY	DATE	2016.08.17
No.	TITLE	DESCRIPTION	Q' TY		SCALE		APPROVED	LANDER	SHEET	

Material	Part Number	Note	<input checked="" type="checkbox"/> RoHS	<input type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other	WL			UNIT	mm	APPROVED	LANDER	SHEET
----------	-------------	------	--	--------------------------------	-----------------------------	-----------------------------	--------------------------------	----	--	--	------	----	----------	--------	-------