




Datenblatt - Fiche technique - Data sheet

21.15.0972


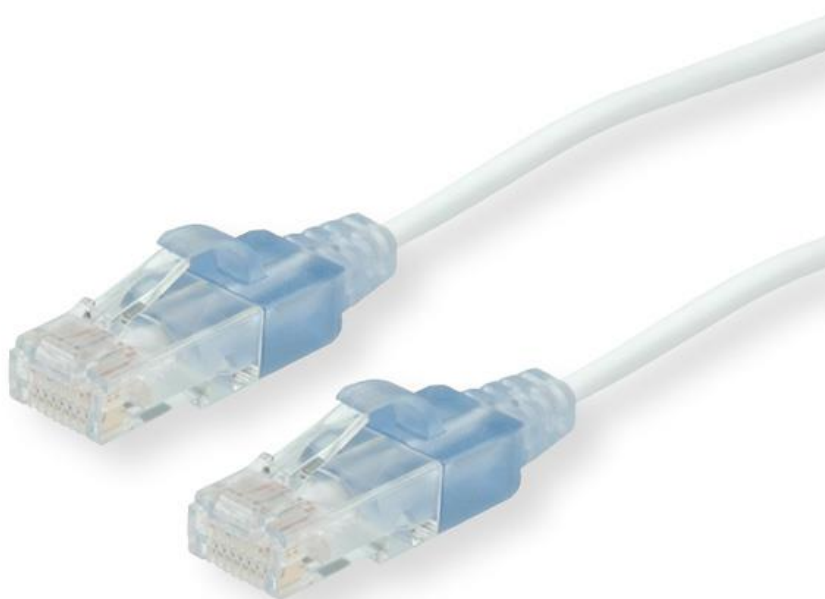


ROLINE UTP-Patchkabel Kat.6A, slim, weiss, 2,0 m

Cordon ROLINE UTP Cat.6A / 10 Gigabit, slim, blanc, 2,0 m



ROLINE UTP Patch Cord Cat.6A, slim, white, 2.0 m

DATE	REV.	REVISION	DRAFTING	CHECKED
2016.8.17	A0	NEW	LM	JZY

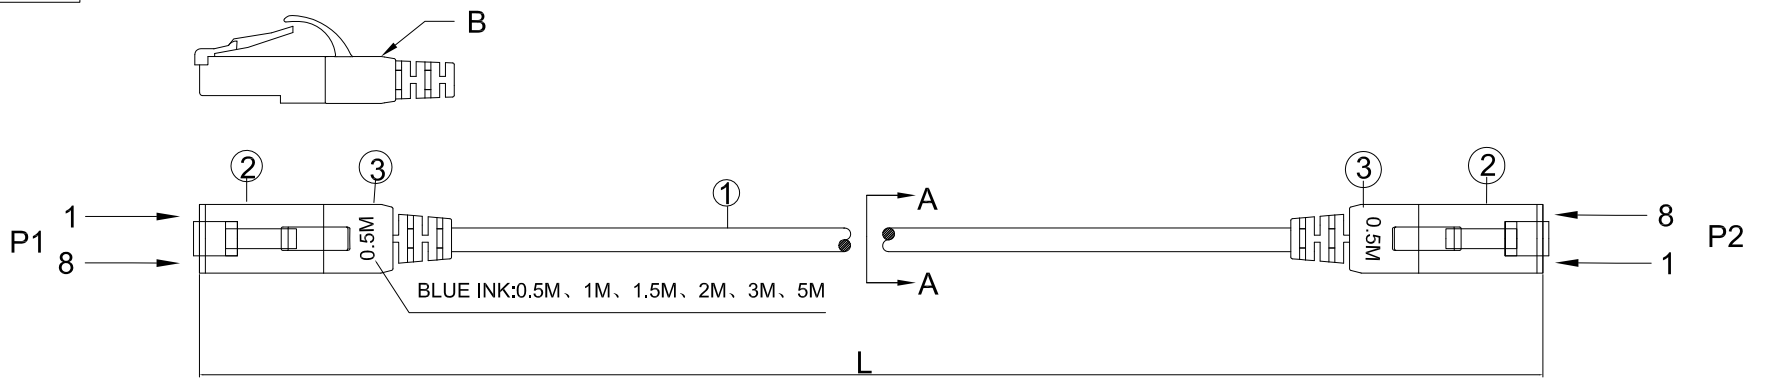

INK MARKING: roline CAT.6A UTP PATCH CONFORMS TO ANSI/TIA-568-C.2 & ISO/IEC 11801 30AWGX4P

Item No.	Length	Tolerance
21.15.0970	0.5m	20mm
21.15.0971	1m	20mm
21.15.0974	1.5m	30mm
21.15.0972	2m	30mm
21.15.0973	3m	30mm
21.15.0975	5m	80mm

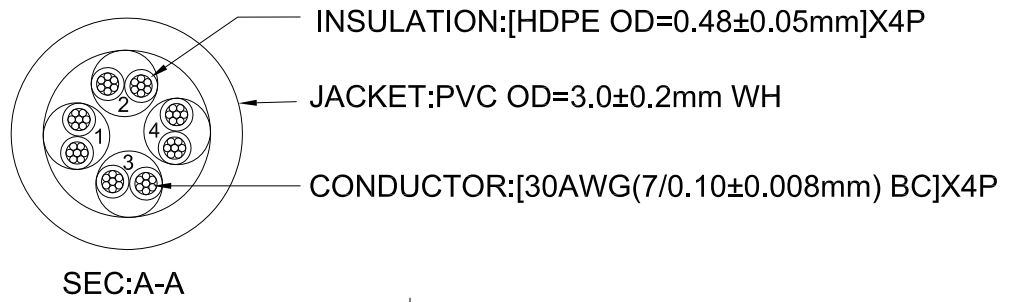

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Minimum Bending Radius : ≥25 mm



③	BOOT	PVC Transparent Blue	2	Unless specified on the drawing, tolerances are per the follows: X. ±0.20 X° ±3 .X ±0.10 .X° ±0.3 .XX ±0.05	DRAW. NO		TITLE	ROLINE UTP Patch Cord Cat6A, slim, White		
②	PLUG	8P8C 50U RJ45	2		CUSTOMER		DRAW	LM	DATE	2016.08.17
①	CABLE	CAT.6A PVC 30AWG*4P WH	1		CUST' R P/N		CHECK	JZY	DATE	2016.08.17
No.	TITLE	DESCRIPTION	Q' TY		UNIT	mm	APPROVED	LANDER	SHEET	

Material	Part Number	Note	<input checked="" type="checkbox"/> RoHS	<input type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other	WL		
----------	-------------	------	--	--------------------------------	-----------------------------	-----------------------------	--------------------------------	----	--	--