



Datenblatt - Fiche technique - Data sheet


21.15.1030



ROLINE UTP-Patchkabel Kat.6, LSOH, rot, 10,0 m

Cordon ROLINE Cat.6 UTP LSOH, rouge, 10,0 m

ROLINE UTP Cable Cat.6, halogen-free, red, 10.0 m

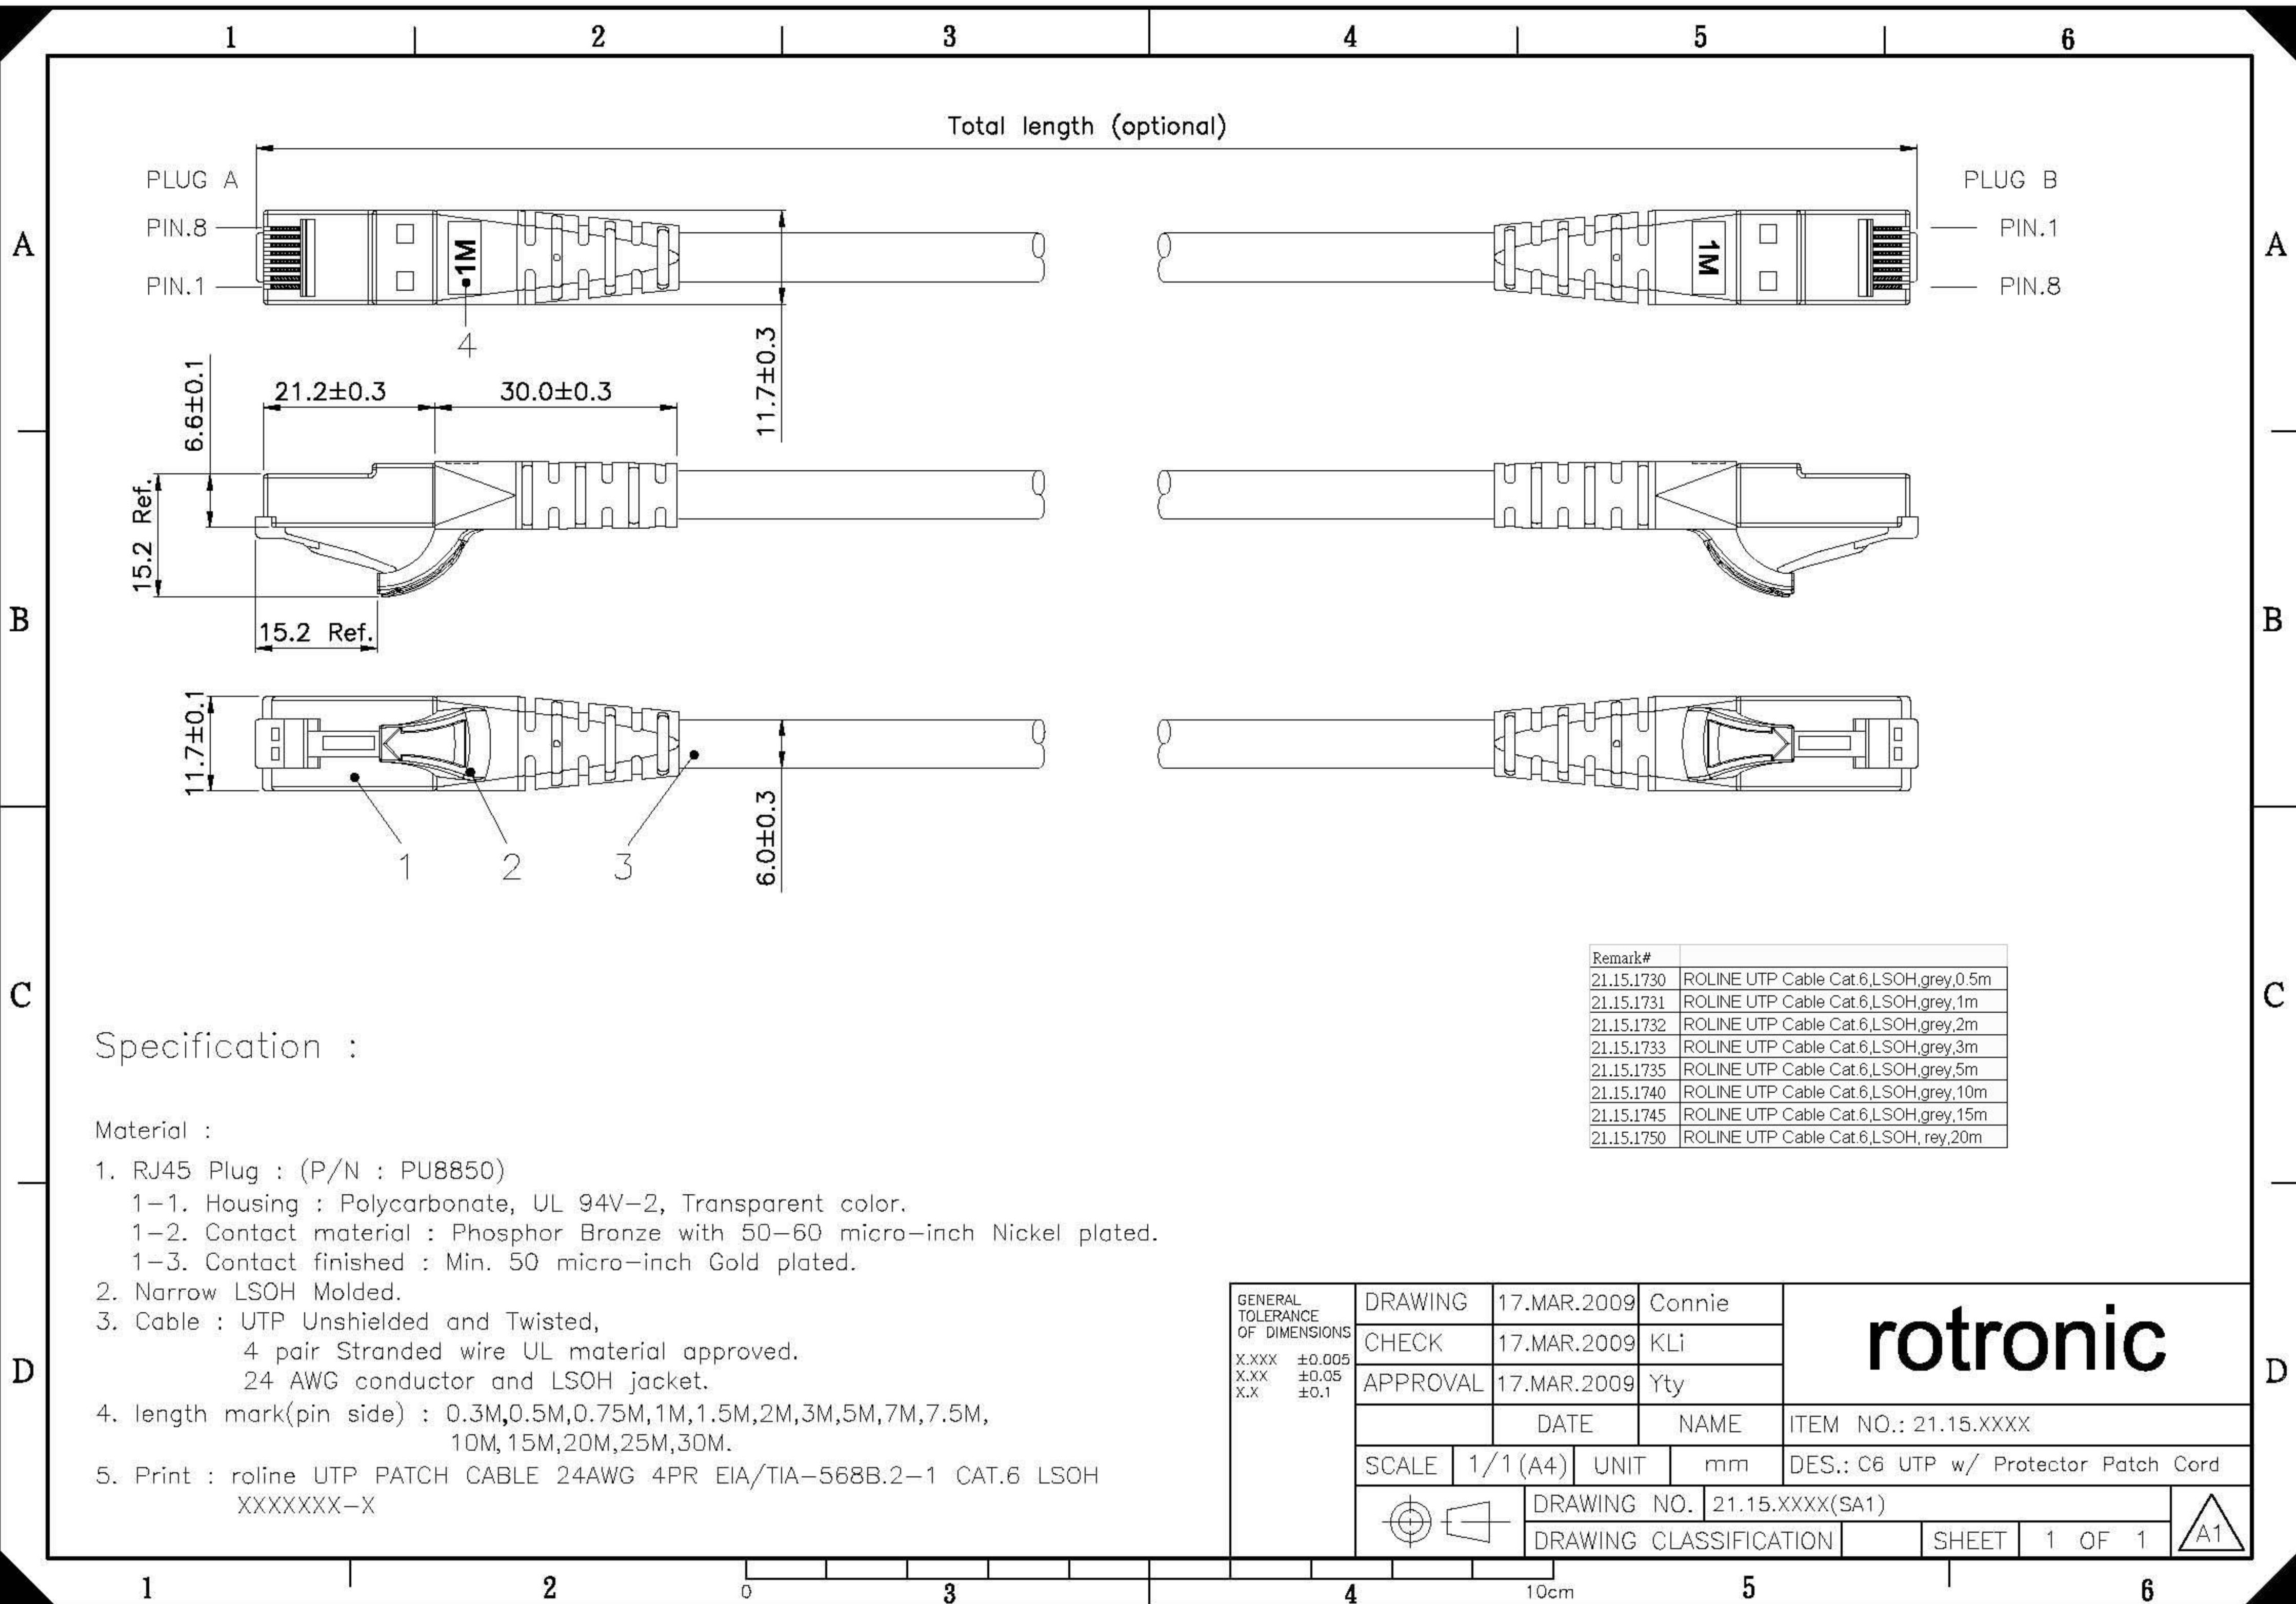

Specification :

Material :

1. RJ45 Plug : (P/N : PU8850)
 - 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated.
2. Narrow LSOH Molded.
3. Cable : UTP Unshielded and Twisted,
 - 4 pair Stranded wire UL material approved.
 - 24 AWG conductor and LSOH jacket.
4. length mark(pin side) : 0.3M,0.5M,0.75M,1M,1.5M,2M,3M,5M,7M,7.5M, 10M,15M,20M,25M,30M.
5. Print : roline UTP PATCH CABLE 24AWG 4PR EIA/TIA-568B.2-1 CAT.6 LSOH XXXXXXXX-X

| Remark# | |
|------------|--------------------------------------|
| 21.15.1730 | ROLINE UTP Cable Cat.6,LSOH,gre,0.5m |
| 21.15.1731 | ROLINE UTP Cable Cat.6,LSOH,gre,1m |
| 21.15.1732 | ROLINE UTP Cable Cat.6,LSOH,gre,2m |
| 21.15.1733 | ROLINE UTP Cable Cat.6,LSOH,gre,3m |
| 21.15.1735 | ROLINE UTP Cable Cat.6,LSOH,gre,5m |
| 21.15.1740 | ROLINE UTP Cable Cat.6,LSOH,gre,10m |
| 21.15.1745 | ROLINE UTP Cable Cat.6,LSOH,gre,15m |
| 21.15.1750 | ROLINE UTP Cable Cat.6,LSOH, gre,20m |

| | | | | |
|---|-----------------------------|-------------|--------------------------------------|----------------------|
| GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1 | DRAWING | 17.MAR.2009 | Connie | rotronic |
| | CHECK | 17.MAR.2009 | KLi | |
| | APPROVAL | 17.MAR.2009 | Yty | |
| | | DATE | NAME | ITEM NO.: 21.15.XXXX |
| | SCALE 1/1 (A4) | UNIT mm | DES.: C6 UTP w/ Protector Patch Cord | |
| | DRAWING NO. 21.15.XXXX(SA1) | | | |
| | DRAWING CLASSIFICATION | | | |