



Datenblatt - Fiche technique - Data sheet

**21.15.1370**



ROLINE Patchkabel Kat.6 S/FTP (PiMF), violett, 5,0 m

Cordon ROLINE Cat.6 S/FTP (PiMF), violet, 5,0 m

ROLINE S/FTP (PiMF) Patch Cord, Cat.6, violet, 5.0 m

1

2





3

4



5

6

Total length (see below list)

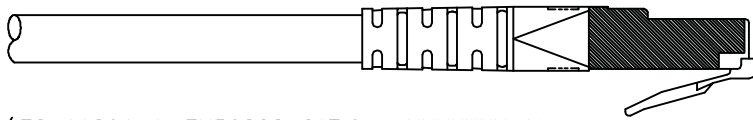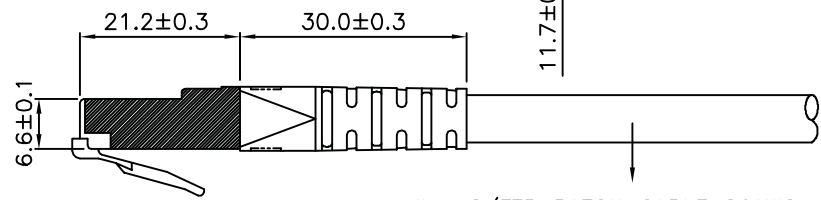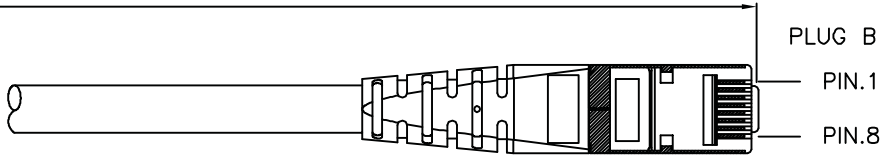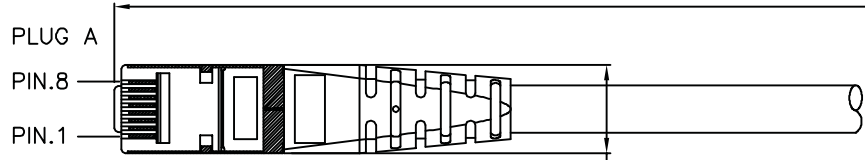

roline S/FTP PATCH CABLE 26AWG 4PR ISO/IEC 11801 & EN50288 CAT.6 XXXXXXXX-X

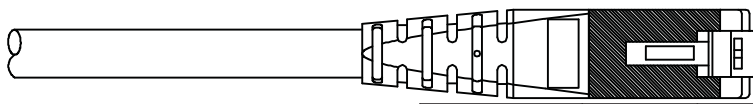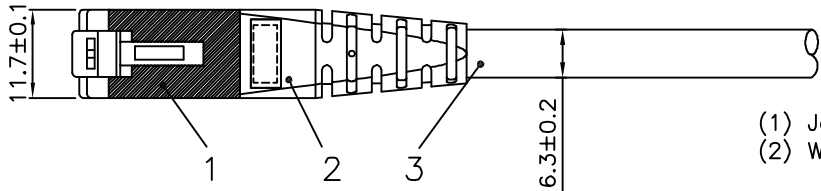

- (1) Jacket Color : Purple(2725C)
- (2) Wiring:T568B

item no.	length	tolerance
21.15.1320	0.3M	+20 -0
21.15.1330	0.5M	+20 -0
21.15.1340	1M	+20 -0
21.15.0844	1.5M	+20 -0
21.15.1350	2M	+20 -10
21.15.1360	3M	+20 -10
21.15.1370	5M	+30 -20
21.15.1380	7M	+30 -20
21.15.1390	10M	+30 -20
21.15.1400	15M	+30 -20
21.15.1410	20M	+70 -30

Specification :

Material :

- RJ45 Plug :
  - Housing : Polycarbonate,Transparent color.
  - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
  - Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
  - Shield : Bronze with Nickel plated.
- Molding : PVC.
- Cable :
  - Jacket : PVC.
  - Conductor : 26 AWG stranded copper.
  - Isolation : PE.
  - Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
- Cable structure : S/FTP, 4 twisted pair.
- Minimum Bending Radius: 50mm

item no	21.15.1320	21.15.1330	21.15.1340	21.15.0844	21.15.1350
	21.15.1360	21.15.1370	21.15.1380	21.15.1390	21.15.1400
Desc	ROLINE Cat.6 S/FTP Patch Cord,Purple				

"#" : Matching DIM. "*" : Important DIM. Others General DIM.	DRAWING	26.Aug.2016	byz	<b>SECOMP</b>
	CHECK	26.Aug.2016	Jane	
	APPROVAL	26.Aug.2016	Jaimy	
		DATE	NAME	
GENERAL TOLERANCE OF DIMENSIONS	SCALE	1/1 (A4)	UNIT	mm
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING NO.			

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER