



Datenblatt - Fiche technique - Data sheet


21.15.1492





ROLINE UTP-Patchkabel Kat.6A Component Level, LSOH, gelb, 1,5 m

Cordon ROLINE UTP Cat.6A / 10 Gigabit, Component Level, LSOH, jaune, 1,5 m

ROLINE UTP Patch Cord Cat.6A, Component Level, LSOH, yellow, 1.5 m

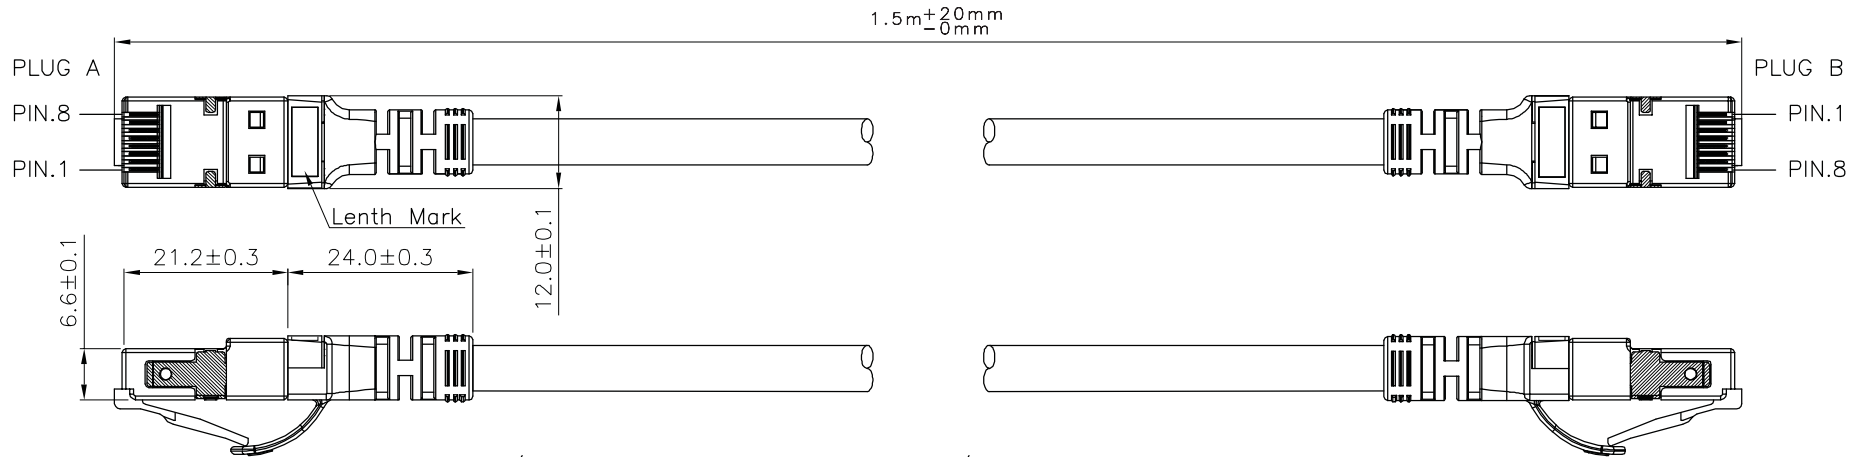

roline U/FTP PATCH CABLE 26AWG 4PR ANSI/TIA 568C.2 CAT.6A LSOH XXXXXX-X

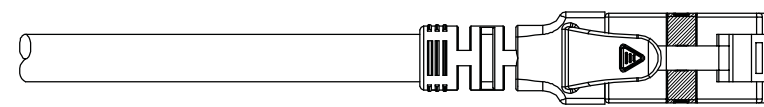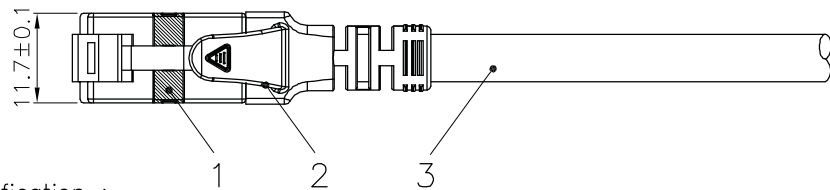


(1) Wiring : T568B

Specification :

Material :

1. RJ45 Plug :
 - 1-1. Housing : Polycarbonate, Transparent color
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area
 - 1-4. Shield : Bronze with Nickel plated
2. SR : SR-V95 FOR U/FTP Boot with nose
3. Cable :
 - 3-1. Jacket : LSOH
 - 3-2. Conductor : 26 AWG stranded copper
 - 3-3. Isolation : PE
 - 3-4. Shield : Aluminum Foil Shielded for Each Pair, copper clad with steel
4. Cable structure : U/FTP, 4 twisted pair
5. Minimum Bending Radius: 50mm

item no.	Jacket Color	
21.15.1490	grey	RAL7035
21.15.1491	red	RAL3031
21.15.1492	yellow	RAL1021
21.15.1493	green	RAL6029
21.15.1494	blue	RAL5015
21.15.1495	black	RAL9011
21.15.1496	white	RAL9003

item no	21.15.1490	21.15.1491	21.15.1492	21.15.1493	21.15.1494
	21.15.1495	21.15.1496			
Desc	ROLINE Cat 6a U/FTP Patch Cord,LSOH.Component Level,1.5m				
"#": Matching DIM.	DRAWING	10.Mar.2015	byz		
"*": Important DIM.	CHECK	10.Mar.2015	Jane		
Others General DIM.	APPROVAL	10.Mar.2015	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS		DATE	NAME		
X.XXX ±0.005	SCALE	1/1 (A4)	UNIT	mm	
X.XX ±0.05	DRAWING NO.				
X.X ±0.1	DRAWING CLASSIFICATION		S	SHEET	1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER