



Datenblatt - Fiche technique - Data sheet



**21.15.2588**



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, braun, 15,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, brun, 15,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, brown, 15.0 m

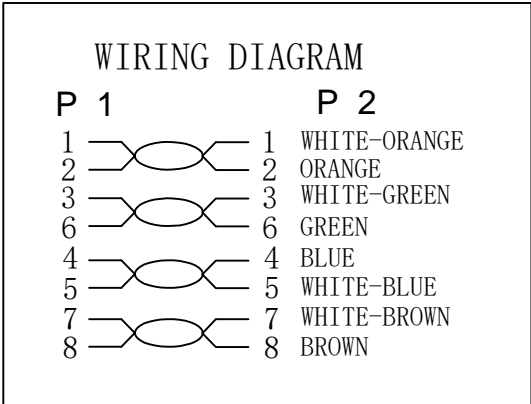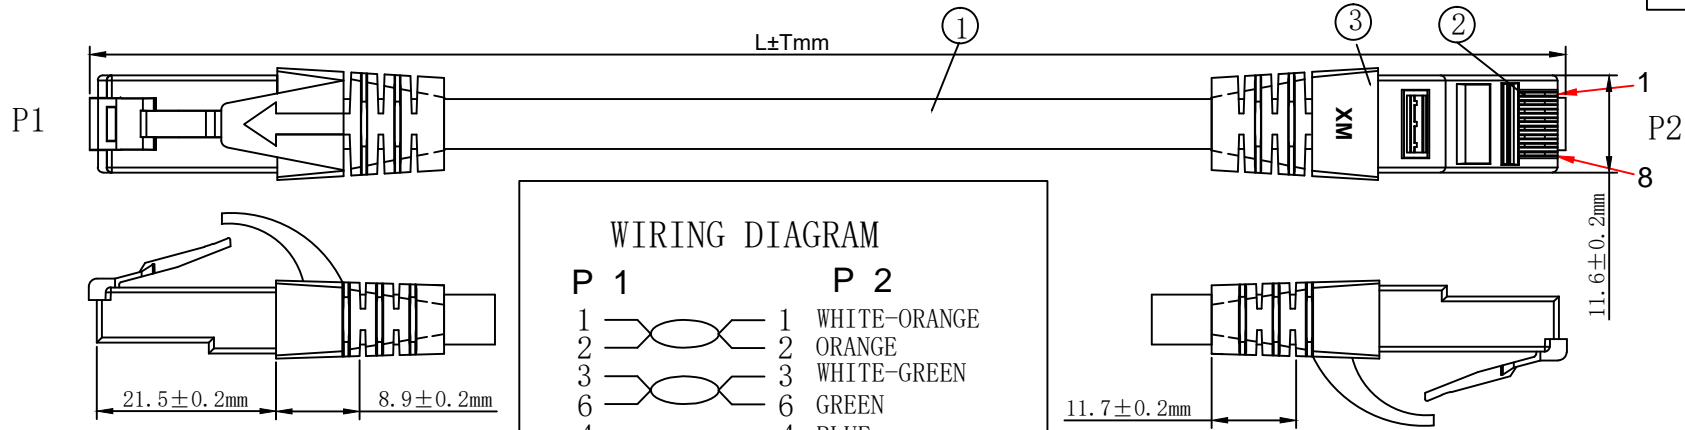

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:50mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Brown	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Brown (PANTONE:463C)		
ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2948	300mm	±10mm
21. 15. 2580	500mm	±15mm
21. 15. 2581	1000mm	±30mm
21. 15. 2584	1500mm	±45mm
21. 15. 2582	2000mm	±60mm
21. 15. 2583	3000mm	±90mm
21. 15. 2585	5000mm	±150mm
21. 15. 2586	7500mm	±210mm
21. 15. 2587	10000mm	±300mm
21. 15. 2588	15000mm	±450mm
21. 15. 2589	20000mm	±600mm

ITEM NO.	21. 15. 2948	21. 15. 2580	21. 15. 2581	21. 15. 2582	21. 15. 2583
21. 15. 2584	21. 15. 2585	21. 15. 2586	21. 15. 2587	21. 15. 2588	21. 15. 2589
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, Brown				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

**SECOMP**