



Datenblatt - Fiche technique - Data sheet

21.15.9750



ROLINE LWL-Kabel 50/125 μ m LC/LC, grau, 0,5m

ROLINE Câble patch FO 50/125 μ m LC/LC, gris, 0,5m

ROLINE Fibre Optic Jumper Cable 50/125 μ m LC/LC, grey, 0.5 m


1 2 3 4 5 6

A

A

B

B

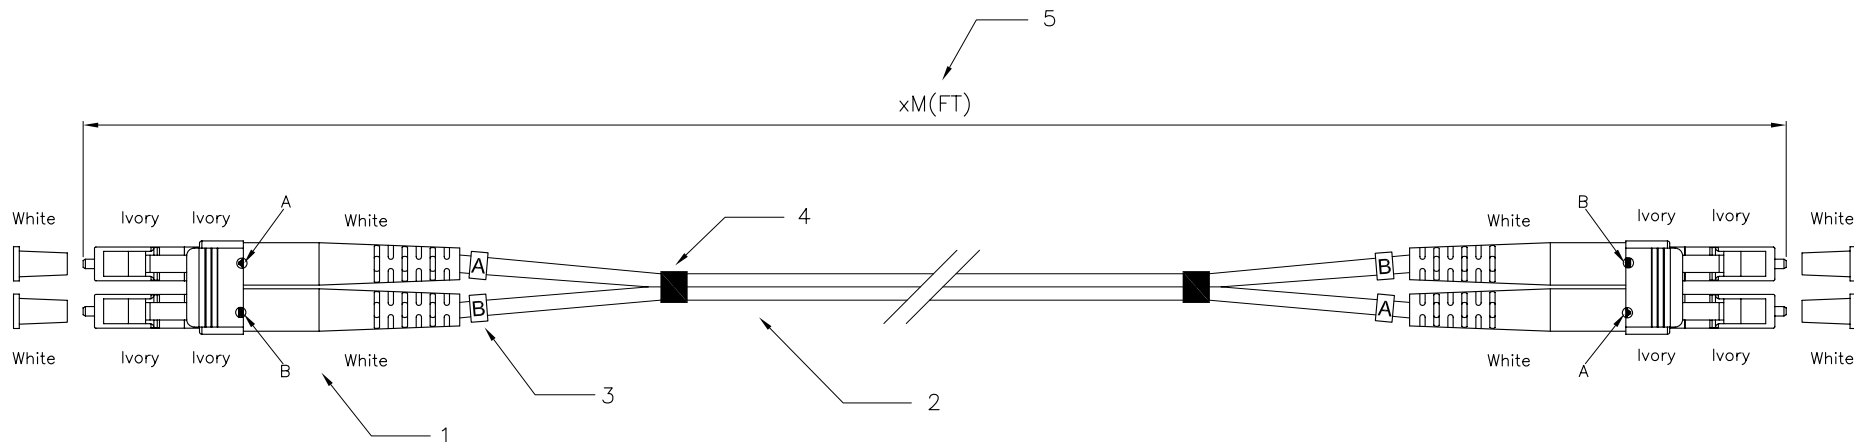

Specification:

1. Connector Type : LC Multimode
2. Cable Type :
 2-1 Zipcord Cable, $\phi 3.0\text{mm}$, 50/125um Multimode.
 2-2 Cable Jacket : Gray Color, PVC Material.
3. Cable Marker
4. Shrink Tube
5. Length : xM(FT)

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\text{um} < H < +0.05\text{um}$
- c. $\phi 1.25\text{mm}$ Ferrule End-face Radius : $7 < R < 25\text{mm}$
- d. Apex Offset : $< 50\text{um}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operating Temperature : $-20^\circ \text{ to } +70^\circ$
- g. Storage Temperature : $-40^\circ \text{ to } +80^\circ$

Remack#

21.15.9750	MultiMode, LC-LC, 50/125 um	0.5M
21.15.9751	MultiMode, LC-LC, 50/125 um	1M
21.15.9752	MultiMode, LC-LC, 50/125 um	2M
21.15.9753	MultiMode, LC-LC, 50/125 um	3M
21.15.9755	MultiMode, LC-LC, 50/125 um	5M
21.15.9760	MultiMode, LC-LC, 50/125 um	10M

C

C

D

GENERAL TOLERANCE OF DIMENSIONS X.XXX ± 0.005 X.XX ± 0.05 X.X ± 0.1	DRAWING	06.JAN.2011	Abby	Rotronic Co.,Ltd.
	CHECK	06.JAN.2011	MAER	
	APPROVAL	06.JAN.2011	YTY	
		DATE	NAME	ITEM NO.: 21.15.XXXX 有吊卡
SCALE	1/1 (A4)	UNIT	mm	DES.: LC to LC Duplex patch cord
	DRAWING NO.	SFBJB023131xxxx36001(SA1)		
	DRAWING CLASSIFICATION	S	SHEET 1 OF 1	

1 2 3 4 5 6

0 10cm