



ND8212W

4-CH Embedded Wi-Fi NVR



H.264 • 1x HDD • HDMI • Wi-Fi • VIVOCLOUD • ONVIF •
Support 4CH Wi-Fi + 4CH Wired

VIVOTEK's ND8212W is a H.264 4-CH Linux-based standalone Wi-Fi NVR that supports a single 3.5" HDD up to 6TB. The ND8212W supports remote access via VIVOTEK's VIVOCLOUD and iViewer apps for both iOS and Android mobile devices, enabling users access to their video anytime, anywhere. The VIVOCLOUD app provides instant push notification and direct video playback functionalities when triggered by an alarm notification, providing seamless security for small-sized video surveillance applications.

Furthermore, the ND8212W is fully integrated with VIVOTEK's VAST/VAST 2 VMS, so users can enjoy the easy-to-use IP surveillance system to protect lives and property more efficiently. With a compact size and fan-less design, the ND8212W is ideal for any small-scale video surveillance installation.

Key Features


- H.264 Compression Technology
- Up to 4CH Wi-Fi + 4CH Wired IP Camera Input
- HDMI Video Output up to 4K Resolution
- 1 x 3.5" SATA HDD up to 6TB
- Up to 8MP Camera Liveview and Playback
- VIVOCLOUD App & Portal for 24/7 Viewing
- Easy Connection with IP Cameras and Quick Auto Setup
- Instant Playback Fisheye Dewarp
- 2.4Ghz 802.11 b/g/n Wi-Fi Connection
- ONVIF Compliance (Project Support Function)
- Compact Size with Fanless Design

Highlight Features

VIVOCloud App & Portal for 24/7 Viewing

The free VIVOCloud app makes surveillance lightweight and portable, ensuring efficient operation. The latest P2P technology makes remote access even more convenient, by simply scanning the QR-code and installing the app, users can view live streams and play recorded clips

with the intuitive interface anytime, anywhere. Armed with the Push Notification function, users will directly get an alert message on their Android/iOS mobile device and directly playback the video to check for any suspicious activity.

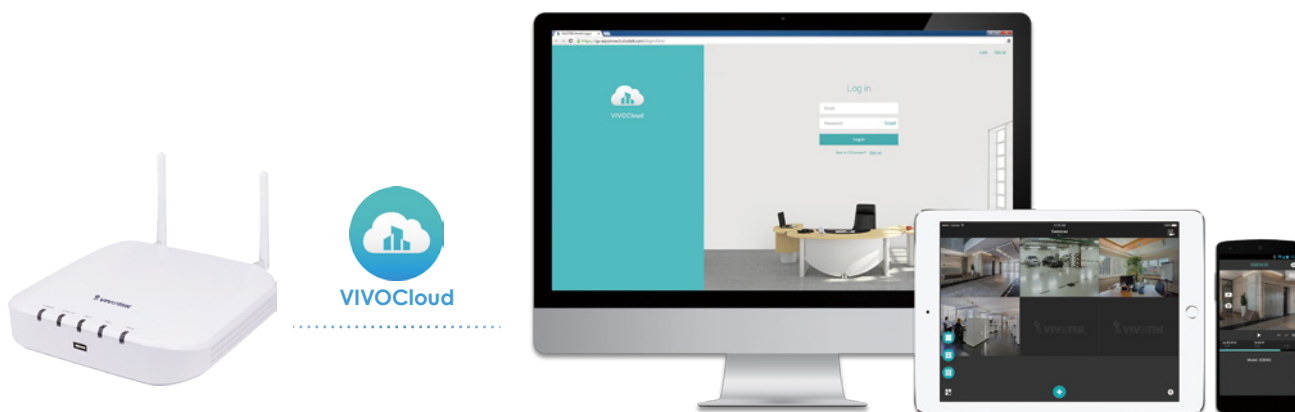

Easy Connection with IP Cameras and Quick Auto Setup

In order to provide users a highly intuitive experience, WPS allows for the IP cameras' positions and connects to the NVR without entering long passphrases. Auto Setup Wizard then conveniently sets up a centralized configuration to reduce connection times to within 4 minutes.

WPS connects to the "NVR and IP Cameras" versus "Router and IP Cameras". It not only saves time up to 60%, but also greatly reduces the difficulty of the device's settings. Honest to say, users may not know what happens between the connection of the NVR and the router.




Highlight Features

Enjoy the Benefits of Wi-Fi

This next generation NVR supports up to 4 IP cameras via 2.4Ghz Wi-Fi connection.

- Easy installation without spending more huge cost and time.
- No drilling and network socket needed.
- Less potential damage and more aesthetically pleasing.
- Easily move or reposition after installed.

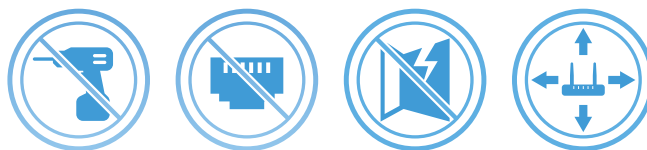

4 Display Modes for Fisheye Dewarp

VIVOTEK's fisheye camera is able to provide 360 degree coverage for wide, open areas, such as retail stores, offices and more. VIVOTEK's NVR offers four display modes for one fisheye network camera simultaneously:

LiveView, Playback, Snapshot and Instant Playback. With VIVOTEK's unique technology Instant Playback Dewarp, users can quickly review the image and react immediately.



Dewarp



- ▶ Live View
- ◀ Instant Playback
- ◀ Playback
- 📷 Snapshot

4CH 1080P Resolution Video Storage over 40 Days


To provide both high-quality video and longer duration storage, the NVR allows users to effectively record 1080P resolution video continuously for up to 40 days without any extra monthly fee. This is the best choice to satisfy users' recording needs. (video throughput: 3M)



3.5" 6TB HDD




24/7



40 Days


System Structure

Wi-Fi/Wired Cameras with WAN Solution

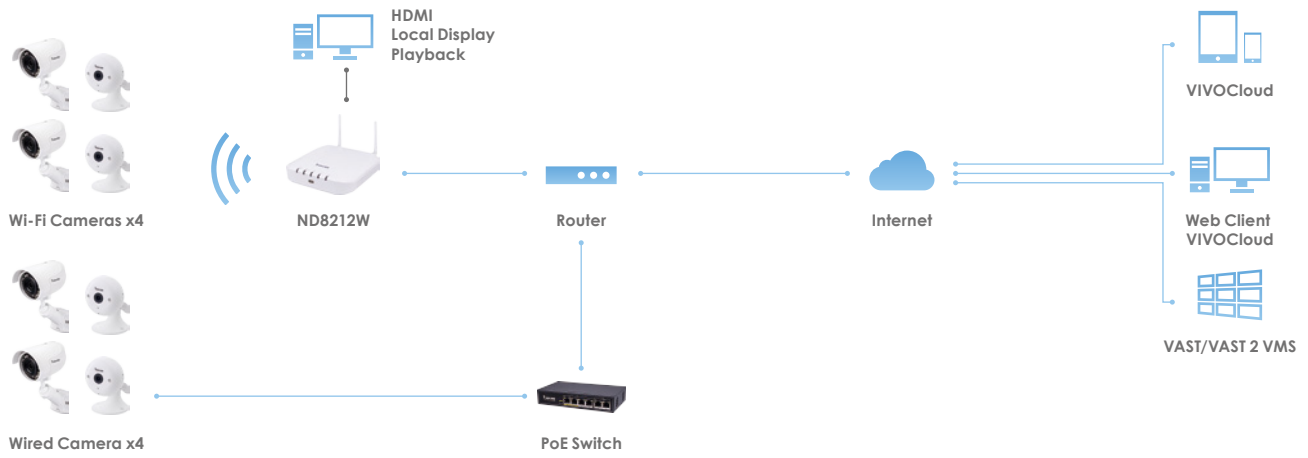


Mechanical Information


Front View

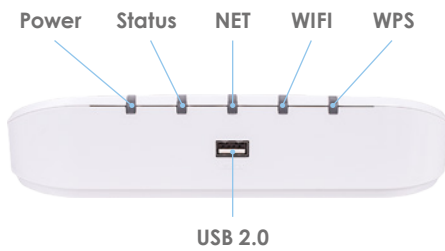

Back View

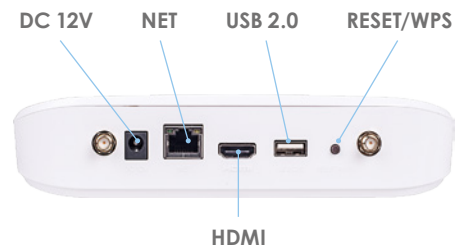

Technical Specifications

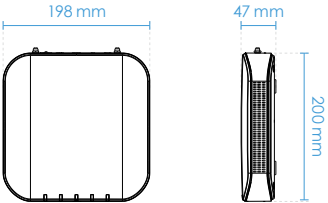Hardware Information		Form Factor	Desktop
Model	ND8212W	Operation Buttons	Reset/WPS (Back)
System		Dimensions	198 (W) x 200 (D) x 47(H) mm
OS	Embedded Linux	Weight	560 g (without HDD)
CPU	ARM Processor	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Flash	256 MB	Humidity	0 ~ 95%
RAM	1GB	General	
Watchdog	Hardware + Software	Safety Certifications	CE, LVD, FCC, VCCI, C-Tick, MIC, NCC, BSMI
Power Restoration	System Restart Automatically after Power Recovery	Warranty	24 months
Storage		Client PC Requirements	
HDD Devices	Internal x1	Operating System	Microsoft Windows OS: XP/Vista/7/8/10/2008/2012
HDD Max. Capacity	6TB x1	CPU	Intel Celeron or above
Disk Management	Create, Format and Remove Disk HDD S.M.A.R.T	Memory	2 GB or above
Video & Audio		Ethernet	10/100Mbps
Video Output	HDMI x1	Display Resolution	1024x768 pixels or above
Resolution	3840x2160, 1920x1080, 1280x720	Web Browser	Internet Explorer 10 (32 bit) or above
Graphics Decoder	Hardware decoding	Software AP	Installation Wizard 2, Shepherd, VAST, VAST 2
Decoding Capacity	H.264: 3840x2160 @ 30 fps (1CH) 1920x1080 @ 120 fps (4CH) 1280x720 @ 240 fps (8CH)	Mobile/Tablet App	VIVOCloud, iViewer (iOS) VIVOCloud, iViewer (Android)
Camera Position	Change the viewcell position on the Live View screens	Cloud Connection	VIVOCloud Portal
External Interface		Accessories	
USB Interface	Front: 1 (USB 2.0) Back: 1 (USB 2.0)	Others	Power adaptor, QIG, 8 x HDD screw, 2 x HDD Brackets, 1 x USB Mouse, 2 x 2.4Ghz Wi-Fi Antenna
Audio	HDMI Audio Output	Dimensions	
Network			
Network Interface	10/100Mbps Ethernet (RJ-45) x 1	Software Information	
Wi-Fi	2.4Ghz 802.11 b/g/n	Record	
Protocols	IPv4, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/ RTCP, SMTP, FTP, DHCP, NTP, DNS, DDNS, IP Filter, WPS	Maximum Channel	Up to 8 (4CH Wi-Fi + 4CH Wired)
Power		Record Throughput (MB)	24 Mbps, default settings: 1920X1080 @ 32 fps (4CH)
Power Input	DC 12V 3A	Network Throughput (MB)	40 Mbps
Power Consumption	Max. 15.6 W	Audio Format	G.711, G.726
LED Indicator			
LED Indicator	Power, Status, NET, Wi-Fi, WPS		
Mechanic			

Technical Specifications

Video Format	MJPEG, H.264
Video Resolution	UP to 8MP Camera
Recording Time (sec.)	Pre-Record: 5 (Max. 10) Post-Record: 20 (Max. 300)
Recording Stream	Single
Recording Mode	Continuous, Schedule, Manual, Event, Activity Adaptive Streaming
Recording Setting	Recycle (unit: day)
Recording Path	Local Path
Record Video Format	3GP
Watermark	Supported
Schedule Backup	Supported

LiveView (Local Display)

Stream Application	Constant/Auto Adaptive Stream
LiveView Display	8 Channels (4CH Wi-Fi + 4CH Wired) Multiple Layout Display: 1x1, 3V, 2x2, 3x3, 1P+3, 2P+3, 1M+5, 1P+6
Monitor Enhancement	OSD Display (NVR), OSD Display (Camera), Camera Information, Remote I/O Control, Event Notification, Aspect Ratio, Fisheye Dewarp (1O, 1P, 1R, 1O3R, 1P3R, 1O8R)
PTZ Control	Panel Control/Joystick
PTZ Operation	Direction Control, Home, Iris, Preset, Patrol (Group), PiP Control

Playback (Local Display)

Playback Display	4 Channels Multiple Layout Display: 1x1, 2x2, 1P+3, 1V+3
Playback Control	Regular (Play, Pause, Stop), Rewind, Next/Previous Frame, Speed Control, Calendar, Event, Timeline, Timeline Scale, Thumbnail (Storyboard)
Video Search	By Calendar, Date/Time, Alarm
Thumbnail Explorer (Storyboard)	Listing the thumbnail of recorded video (Max. 2 CH)
Monitor Enhancement	OSD Display (Camera), Event Notification, Aspect Ratio, PiP Control, Fisheye Dewarp (1O, 1P, 1R, 1O3R, 1P3R, 1O8R)
Snapshot	JPEG
Video Clip Export	EXE

LiveView (Remote)

Stream Application	Stream Selection
Audio Capability	One Way
LiveView Display	4 Channels Multi Layout Display: 1x1, 2x2, 1V+3
Monitor Enhancement	OSD Display (NVR), Drag & Drop, Image Freeze, Audio Control, Remote I/O Control, Event Notification, Bookmark, Fisheye Dewarp (1O, 1P, 1R)

PTZ Control	Panel Control
PTZ Operation	Direction Control, Home, Zoom, Focus, Iris, Preset, Patrol (Group), PiP Control
Snapshot	JPEG

Playback (Remote)

Playback Display	4 Channels Multiple Layout Display: 1x1, 2x2, 1V+3
Playback Control	Regular (Play, Pause, Stop), Next Frame, Speed Control, Calendar, Timeline, Timeline Scale, Bookmark
Monitor Enhancement	OSD Display (NVR), Drag & Drop, Audio Control, PiP Control, Fisheye Dewarp (1O, 1P, 1R)
Snapshot	JPEG
Video Clip Export	EXE

Alarm Management

Schedule Type	Continuous, Schedule, Manual
Event	Motion Detection, PIR Detection, Tampering Detection, Digital Input (Camera), Digital Output (Camera), Connection Abnormal, Storage Abnormal, Storage Full, Camera Network Loss
Action	Record, Email (Text), Email (Snapshot), FTP, Buzzer, ePTZ Control (Go to Preset), Camera DO, VIVOCLOUD APP Notification
Recording Time (sec.)	Pre-Record: 5 (Max. 10) Post-Record: 20 (Max. 300)

Backup

Manual	USB Dongle (FAT Format), FTP Server Upload
--------	--

System

User Management	User Account: 16 User Account Time Limit: 10 mins User Level: Administrator/Regular User User Feature Definition: By Camera
Log	System, Recording, User, Error
Date&Time	Time Zone, Manual, Automatic Sync NTP, Daylight Saving Time
Firmware	Manual update
Restore Default	Supported
Backup/Restore (Configuration)	Supported
Language	Czech, English, French, German, Italian, Japanese, Korean, Portuguese, Russian, Spanish, Simplified Chinese, Traditional Chinese, Polish

Camera Integration

Insert Camera	Manual, Search
Video (Media) Setting	Compression, Resolution, FPS, Video Quality
Image Setting	Image Display, Image Adjustment

Technical Specifications

Motion Detection	Supported
ONVIF Core SPEC.	Version 2.2 or above (By Project)
ONVIF Stream	Video (H.264 & MJPEG)
ONVIF Recording	Continuous, Schedule, Manual
ONVIF Discover	Discover other brand camera through "Insert Camera & Batch Insert"



C series **IB8360/60-W** Mini Bullet Network Camera

2MP • 12M IR • SNV • Smart Stream II • IP66 • PoE •
WiFi • Compact Size • VIVOCLOUD

VIVOTEK's IB8360 and IB8360-W (wireless) are stylish 2-megapixel mini outdoor bullet network cameras, specifically designed for boutique retail applications. Delivering a resolution of 1920x1080 at 30 fps, having IR illuminators effective up to 12 meters, and including SNV technology for low light environments, these remarkable cameras provide users with superior image quality around the clock.

When coupled with VIVOTEK's Smart Stream II technology, the IB8360/IB8360-W can reduce both bandwidth and storage consumption by up to 50%* while retaining the same superb image quality as a Full HD camera. Built to withstand challenging


weather conditions, the IB8360/IB8360-W is armed with weather-proof IP66-rated housing to withstand rain and dust, and ensure smooth operation.

VIVOTEK provides two easy-to-install options for this compact camera; the IB8360-W boasts a 802.11b/g/n compatible wireless connection, and the IB8360 is designed for Power over Ethernet (PoE) functionality. Both cameras were designed and constructed for simple installation and easy connection.


* Depending on scenes

Key Features

- 30 fps @ 1920x1080
- Built-in IR Illuminators up to 12 Meters
- Smart IR Technology to Avoid Overexposure
- SNV (Supreme Night Visibility) for Low Light Conditions
- Smart Stream II to Optimize Bandwidth Efficiency
- Weather-proof IP66-rated Housing
- Built-in 802.3af Compliant PoE (IB8360)
- Built-in 802.11 b/g/n WLAN (IB8360-W)
- Built-in MicroSD/SDHC/SDXC Card Slot for On-board Storage
- Compact Size
- VIVOCLOUD Mobile App

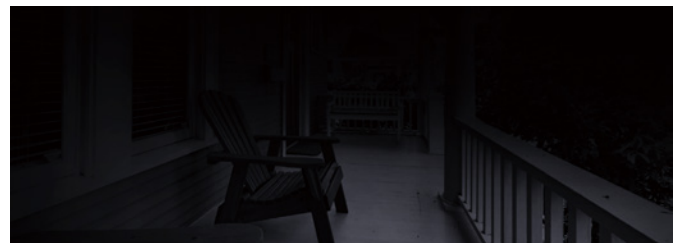

IR off

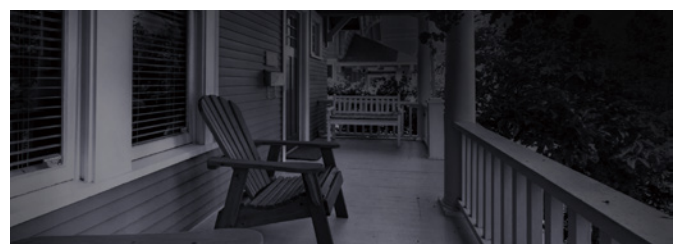


IR On

Technical Specifications

Model	IB8360: PoE, 12M IR, IP66 IB8360-W: WiFi, 12M IR, IP66		
System Information			
CPU	Multimedia SoC (System-on-Chip)		
Flash	128MB		
RAM	256MB		
Camera Features			
Image Sensor	1/2.9" Progressive CMOS		
Max. Resolution	1920x1080		
Lens Type	Fixed-focal		
Focal Length	f = 3.6 mm		
Aperture	F2.0		
Iris type	Fixed-iris		
Field of View	89° (Horizontal) 46° (Vertical) 105° (Diagonal)		
Shutter Time	1/5 sec. to 1/32,000 sec.		
WDR Technology	WDR Enhanced		
Day/Night	Yes		
Removable IR-cut filter	Yes		
IR Illuminators	Built-in IR illuminators, effective up to 12 meters with Smart IR, IR LED*10		
Minimum Illumination	0.1 Lux @ F2.0 (Color) 0.01 Lux @ F2.0 (B/W) 0 Lux with IR illumination on		
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)		
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording		
Video			
Compression	H.264, MJPEG		
Maximum Frame Rate	30 fps @ 1920x1080		
Maximum Streams	3 simultaneous streams		
S/N Ratio	65dB		
Dynamic Range	70dB		
Video Streaming	Adjustable resolution, quality and bitrate, Smart Stream II		
Image Settings	Adjustable image size, quality and bit rate; Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks; Scheduled profile settings, defog, 3DNR, video rotation		
Network			
Users	Live viewing for up to 10 clients		
		Protocols	IB8360: IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/ RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, SSL, TLS, ARP, CIFS/SMB IB8360-W: IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/ RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, SNMP, SSL, TLS, ARP, CIFS/SMB
		Interface	IB8360: 10 Base-T/100 Base-TX Ethernet(RJ-45) IB8360-W: IEEE 802.11 b/g/n WLAN
		ONVIF	Supported, specification available at www.onvif.org
		Intelligent Video	
		Video Motion Detection	Five-window video motion detection
		Alarm and Event	
		Alarm Triggers	Motion detection, manual trigger, periodical trigger, system boot, recording notification, camera tampering detection
		Alarm Events	Event notification using HTTP, SMTP, FTP, NAS server and MicroSD card File upload via HTTP, SMTP, FTP, NAS server and MicroSD card
		General	
		Connectors	IB8360: RJ-45 cable connector for 10/100Mbps Network/PoE connection*1 IB8360-W: DC 12V power input*1
		LED Indicator	System power and status indicator
		Power Input	IB8360: IEEE 802.3af PoE Class 2 IB8360-W: DC 12V 1.5A
		Power Consumption	Max. 6.1 W
		Dimensions	99.22 x 74.47 x 163.53 mm
		Weight	IB8360-W: 195 g IB8360: 220 g
		Casing	IP66
		Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick
		Operating Temperature	Starting Temperature: -20°C ~ 50°C (-4°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
		Humidity	90%
		Warranty	24 months
		System Requirements	
		Operating System	Microsoft Windows 8/7
		Web Browser	Mozilla Firefox 7~43 (streaming only) Internet Explorer 10/11
		Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
		Included Accessories	
		Power Adapter	IB8360-W: 12V, 1.5A DC power adapter
		Others	Quick installation guide, warranty card, stand with screw kit

Technical Specifications

Dimensions





IP8160



IP8160-W

Cube Network Camera



2MP · 8M IR · Smart Stream II · AEC · PoE ·
WiFi · Compact Size

VIVOTEK's IP8160/IP8160-W is a stylish 2-megapixel cube network camera specifically designed for small-scale retail security applications. With a resolution of 1920x1080 at 30 fps, a removable IR-cut filter and built-in IR illuminators effective up to 8 meters, this remarkable camera provides users with superior image quality around the clock.

When coupled with VIVOTEK's Smart Stream II technology, the IP8160/IP8160-W can reduce both bandwidth and storage consumption by up to 50%* while retaining the same superb image quality as a Full HD camera.

Further, the camera supports two-way audio, and employs Acoustic Echo Cancellation (AEC) to greatly enhance audio quality and provide a clearer, smoother auditory image. VIVOTEK provides two easy-to-install options for this compact camera; the IP8160-W boasts a 802.11b/g/n compatible wireless connection, and the IP8160 is designed for Power over Ethernet (PoE) functionality, making setup of these two powerful cameras both quick and simple.


* Depending on scenes

Key Features

- 30 fps @ 1920x1080
- Built-in IR Illuminators up to 8 M
- Smart IR Technology to Avoid Overexposure
- Smart Stream II to Optimize Bandwidth Efficiency
- Built-in Microphone and Speaker for Two-way Audio
- Acoustic Echo Cancellation (AEC) for Optimizing Sound System
- Built-in 802.3af Compliant PoE (IP8160)
- Built-in 802.11 b/g/n WLAN (IP8160-W)
- Built-in MicroSD/SDHC/SDXC Card Slot for On-board Storage
- Compact Design



IR On

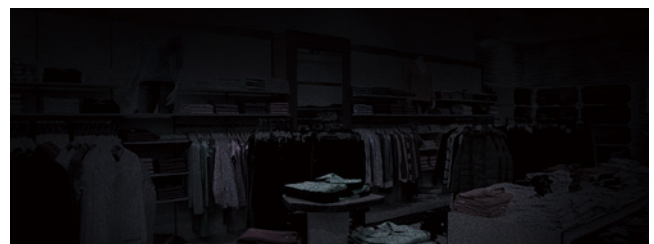

IR Off

Technical Specifications

Model	IP8160: PoE, 8M IR IP8160-W: WiFi, 8M IR	Interface	Built-in microphone Built-in speaker
System Information		Effective Range	5 meters
CPU	Multimedia SoC (System-on-Chip)	Network	
Flash	128 MB	Users	Live viewing for up to 10 clients
RAM	256 MB	Protocols	IP8160: IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, SSL/TLS, ARP IP8160-W: IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, SNMP, ARP
Camera Features		Interface	IP8160: 10 Base-T/100 Base-TX Ethernet (RJ-45) IP8160-W: IEEE 802.11 b/g/n WLAN
Image Sensor	1/2.9" Progressive CMOS	ONVIF	Supported, specification available at www.onvif.org
Maximum Resolution	1920x1080	Intelligent Video	
Lens Type	Fixed-focal	Video Motion Detection	Five-window video motion detection
Focal Length	f = 2.8 mm	Alarm and Event	
Aperture	F1.8	Alarm Triggers	Motion detection, manual trigger, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
Field of View	113° (Horizontal) 63° (Vertical) 136° (Diagonal)	Alarm Events	Event notification using HTTP, SMTP, FTP, NAS server and SD Card File upload via HTTP, SMTP, FTP, NAS server and SD card
Shutter Time	1/5 sec. to 1/32,000 sec.	General	
WDR Technology	WDR Enhanced	Connectors	IP8160: RJ-45 cable connector for 10/100Mbps Network/PoE connection*1 IP8160-W: Micro USB connector for DC 5V power input*1
Day/Night	Removable IR-cut filter for day & night function	LED Indicator	System power and status indicator
Minimum Illumination	0.07 Lux @ F1.8 (Color) < 0.01 Lux @ F1.8(B/W)	Power Input	IP8160: IEEE 802.3af POE Class 0 IP8160-W: DC 5V
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)	Power Consumption	IP8160: Max. 5.5 W IP8160-W: Max. 8 W
IR Illuminators	Built-in IR illuminators, effective up to 8 meters with Smart IR IR LED*2	Dimensions	Ø 66 x 38.9 mm
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording	Weight	IP8160: 100.6 g (Camera unit), 58 g (Stand) IP8160-W: 62 g (Camera unit), 58 g (Stand)
Video		Safety Certifications	CE, LVD, FCC Class B, VCCI, C-Tick
Compression	H.264 & MJPEG	Operating Temperature	Starting Temperature: 0°C ~ 40°C (32°F ~ 104°F) Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
Maximum Frame Rate	30 fps @ 1920x1080 15 fps @ 1920x1080 (Acoustic Echo Cancellation On)	Humidity	90%
Maximum Streams	3 simultaneous streams	Warranty	24 months
S/N Ratio	70 dB	System Requirements	
Dynamic Range	70 dB	Operating System	Microsoft Windows 8/7/Vista/XP/2000
Video Streaming	Adjustable resolution, quality and bitrate Smart Stream II		
Image Settings	Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks; Scheduled profile settings, defog, 3DNR, video rotation		
Audio			
Audio Capability	Two-way Audio (Full duplex)		
Compression	G.711, G.726		

Technical Specifications

Web Browser	Mozilla Firefox 7~43 (streaming only) Internet Explorer 7/8/9/10/11
Other Players	VLC: 1.1.11 or above QuickTime: 7 or above
Included Accessories	
Power Adapter	IP8160-W: 5V, 2A USB connector adapter
Others	Quick installation guide, warranty card, stand with screw kit, USB connector adapter(IP8160-W)

Dimensions

