



Datenblatt - Fiche technique - Data sheet


**21.99.9305**



VALUE LWL-Kabel 62,5/125µm SC/SC, orange, 5m

VALUE Câble patch FO 62,5/125µm SC/SC, orange, 5m

VALUE Fibre Optic Jumper Cable 62,5/125µm SC/SC, orange, 5 m

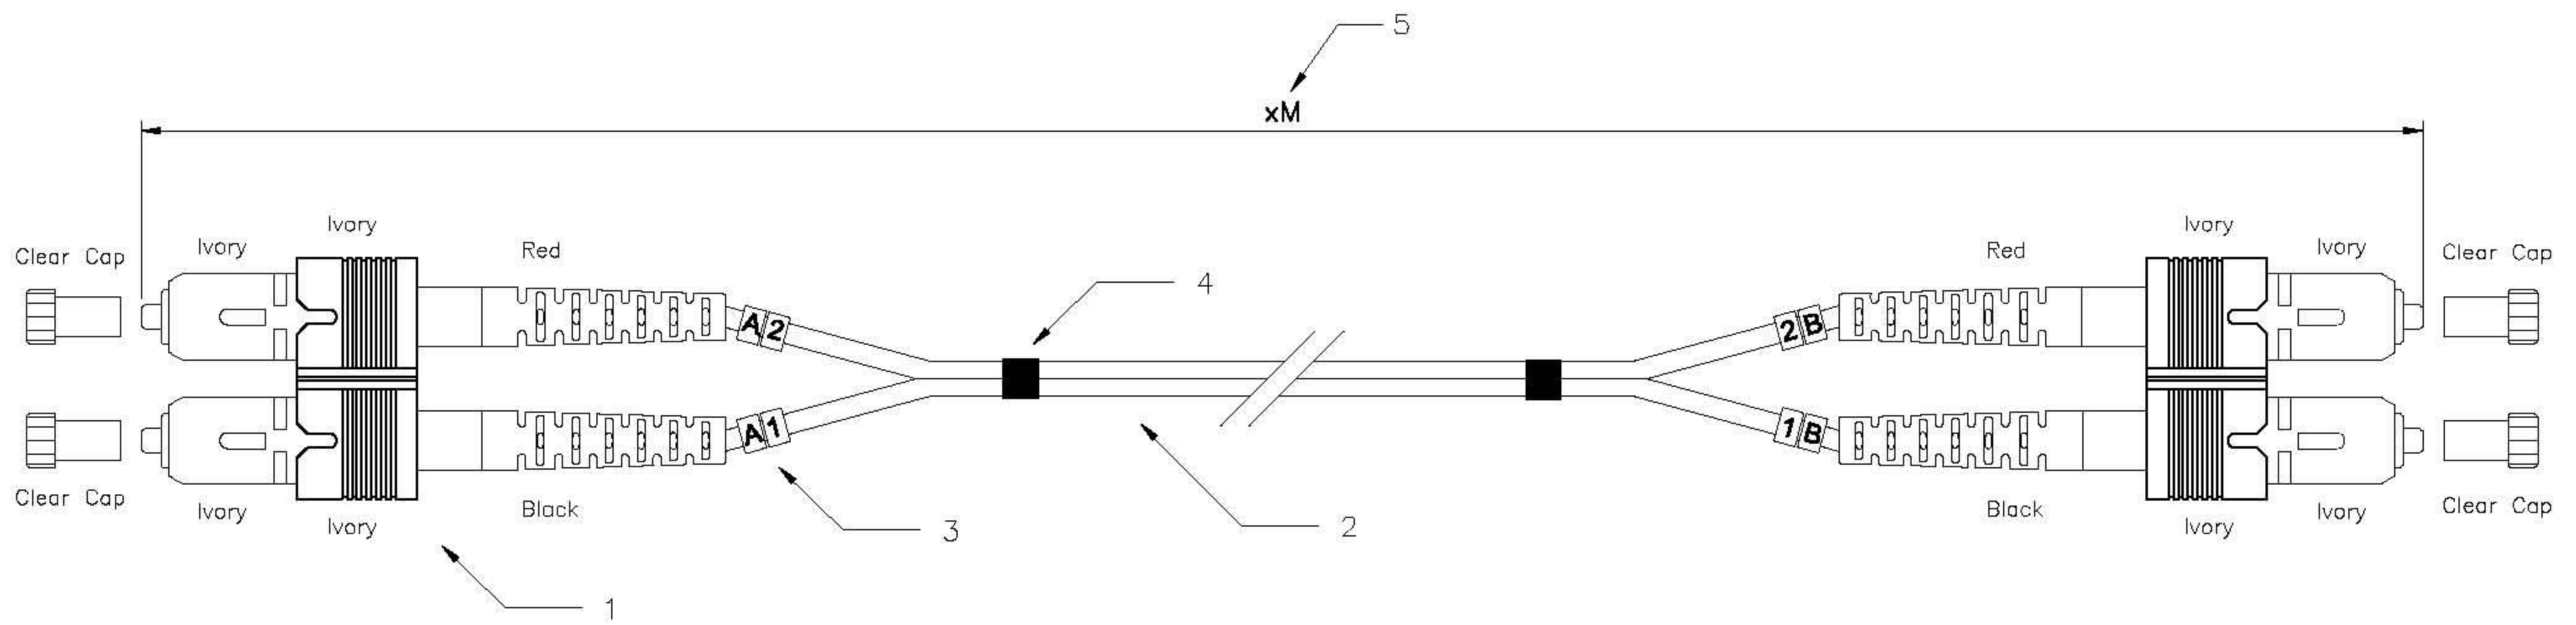

Specification:

1. Connector Type : SC Multimode
2. Cable Type :  
 2-1 Zipcord cable,  $\phi 3.0\text{mm}$ , 62.5/125um Multimode  
 2-2 Calbe Jacket : Orange color, PVC material
3. Cable Marker
4. Shrink Tube
5. Length : xM

Performance:

- a. Insertion Loss :  $< 0.5 \text{ dB}$
- b. Fiber Extension :  $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. Ferrule End-face Radius :  $10 < R < 25\text{mm}$
- d. Apex Offset :  $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating :  $0.2 \text{ dB Max}$
- f. Operation Temperature :  $-20^\circ \text{ to } +70^\circ$
- g. Storage Temperature :  $-40^\circ \text{ to } +80^\circ$

Remark#

21.15.9302	ROLINE FO Cab.,62.5/125,SC-SC,orange,2m
21.15.9303	ROLINE FO Cab.,62.5/125,SC-SC,orange,3m
21.15.9305	ROLINE FO Cab.,62.5/125,SC-SC,orange,5m
21.15.9309	ROLINE FO Cab.,62.5/125,SC-SC,orange,10m
21.99.9302	VALUE FO Cab.,62.5/125,SC-SC,orange,2m
21.99.9303	VALUE FO Cab.,62.5/125,SC-SC,orange,3m
21.99.9305	VALUE FO Cab.,62.5/125,SC-SC,orange,5m

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	17.MAR.2009	Connie	<b>rotronic</b>	
	CHECK	17.MAR.2009	KLi		
	APPROVAL	17.MAR.2009	Yty		
		DATE	NAME	ITEM NO.: 21.15.XXXX有吊卡 · 21.99.XXXX無吊卡	
	SCALE	1/1 (A4)	UNIT	mm	DES.: SC to SC Duplex patch cord
	DRAWING NO. AFAJ091515XXXX(SA1)		DRAWING CLASSIFICATION		SHEET 1 OF 1

