



Datenblatt - Fiche technique - Data sheet


21.99.9853



VALUE LWL-Kabel 50/125 μ m LC/SC, grau, 3m

VALUE Câble patch FO 50/125 μ m LC/SC, gris, 3m

VALUE Fibre Optic Jumper Cable 50/125 μ m LC/SC, grey, 3 m

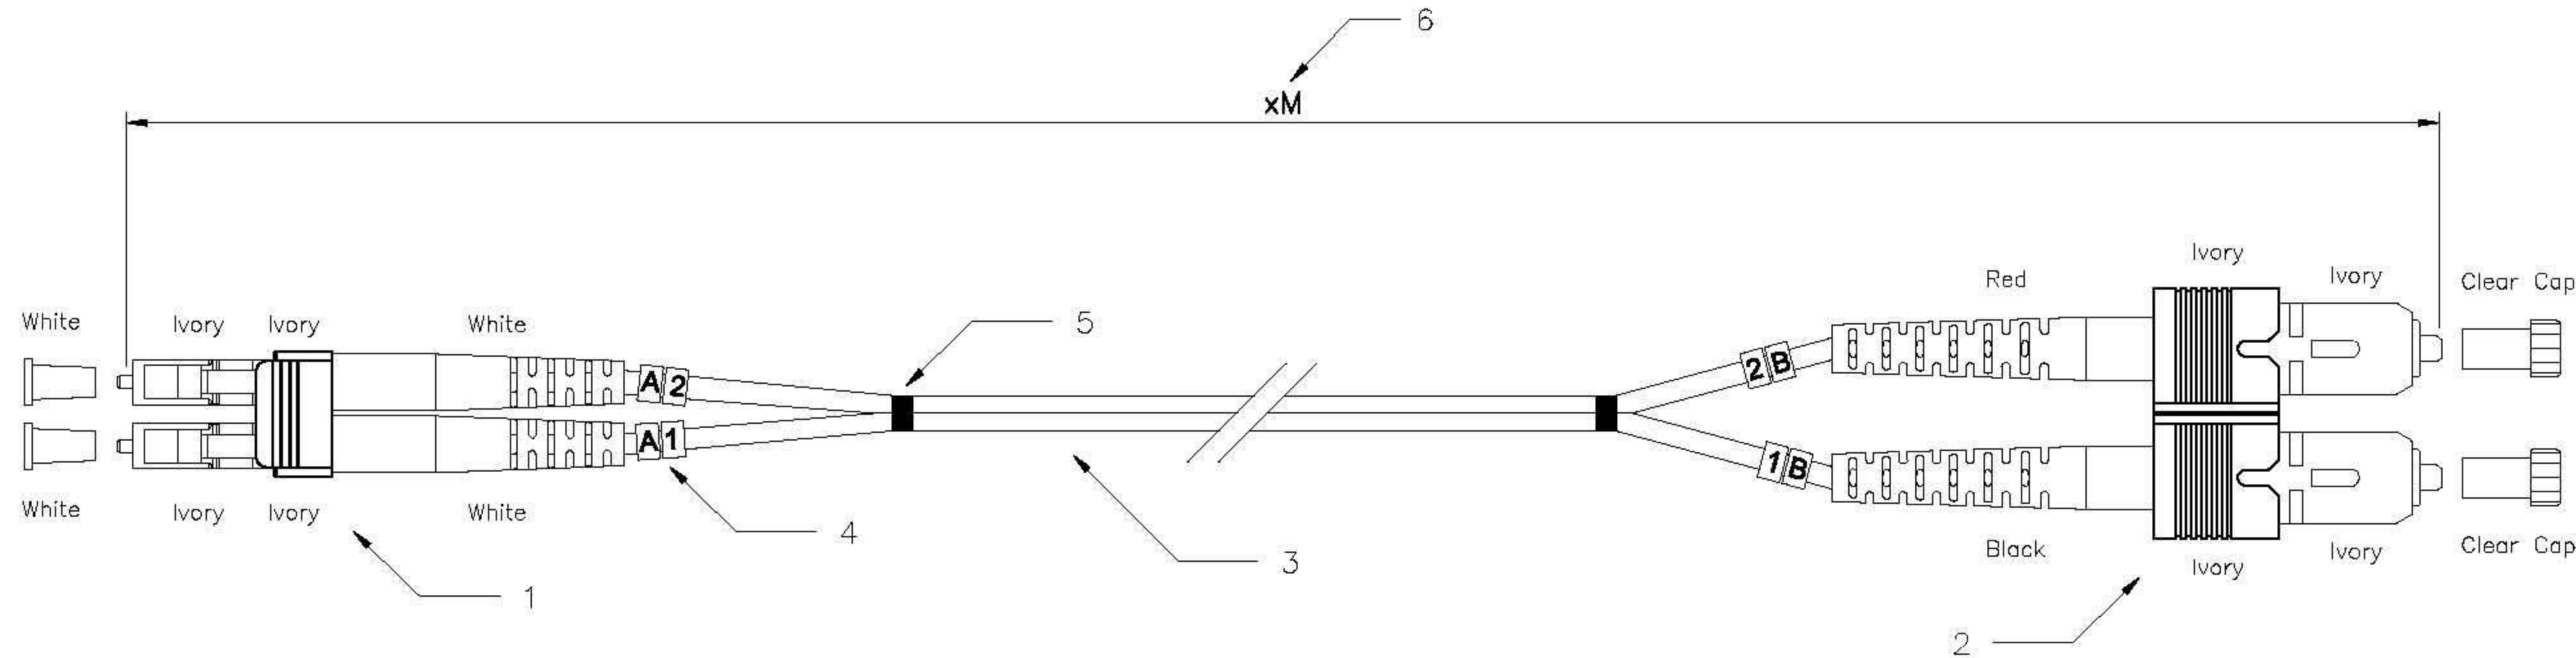

Specification:

1. Connector Type : LC Multimode
2. Connector Type : SC Multimode
3. Cable Type :
 - 3-1 Zipcord cable, $\phi 3.0\text{mm}$, 50/125um Multimode
 - 3-2 Calbe Jacket : Gray color, PVC material
4. Cable Marker
5. Shrink Tube
6. Length : xM

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extension : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. LC Ferrule End-face Radius : $7 < R < 25\text{mm}$
SC Ferrule End-face Radius : $10 < R < 25\text{mm}$
- d. Apex Offset : $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operation Temperature : $-20^\circ \text{ to } +70^\circ$
- g. Storage Temperature : $-40^\circ \text{ to } +80^\circ$

21.99.9852	VALUE FO Cab.,50/125,LC-SC,gre,2m
21.99.9853	VALUE FO Cab.,50/125,LC-SC,gre,3m
21.99.9855	VALUE FO Cab.,50/125,LC-SC,gre,5m

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	17.MAR.2009	Connie	rotronic		
	CHECK	17.MAR.2009	KLi			
	APPROVAL	17.MAR.2009	Yty			
		DATE	NAME	ITEM NO.:	21.15.XXXX有吊卡 · 21.99.XXXX無吊卡	
	SCALE	1/1 (A4)	UNIT	mm	DES.:	SC to LC Duplex patch cord
	DRAWING NO.		AFAJB021531XXXX(SA1)			
	DRAWING CLASSIFICATION			SHEET	1 OF 1	A1