RoHS Compliant

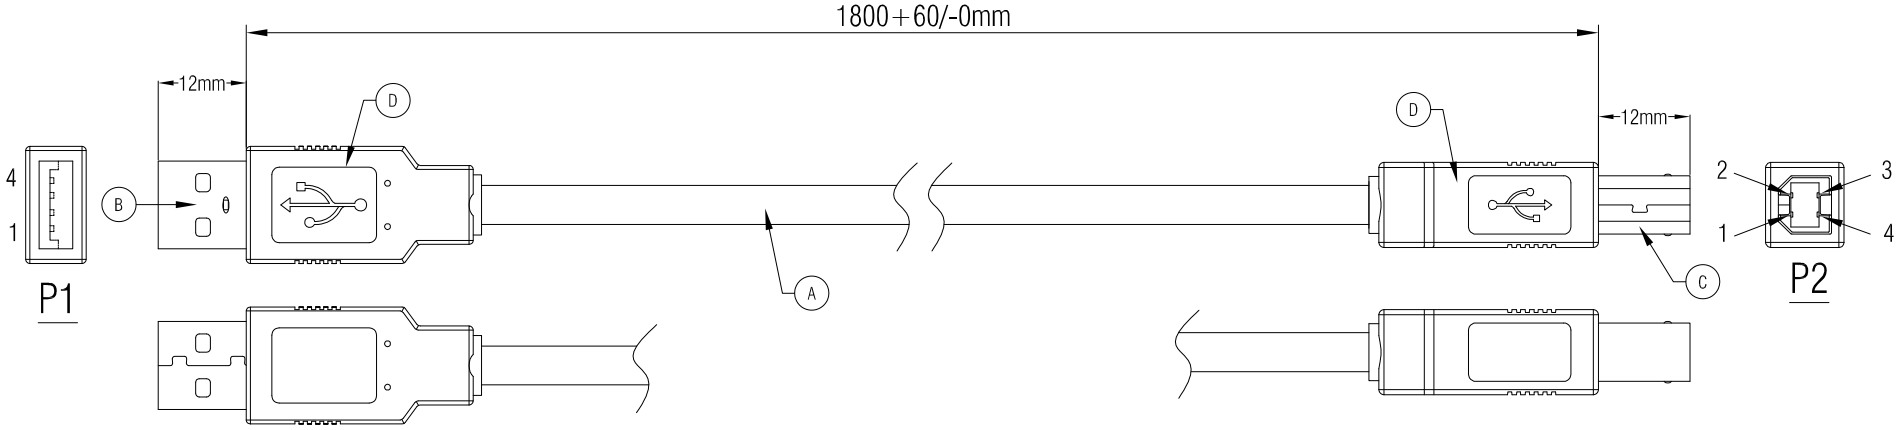

WIRE ADDRESS



Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:3Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
D	45P PVC BLACK		G
C	USB 2.0 B MALE(White Insulator,Shell Nickel Plated,Pin Gold Plated 3U")	1	PCS
B	USB 2.0 A MALE(White Insulator,Shell Nickel Plated,Pin Gold Plated 3U")	1	PCS
A	NON-UL(28#*2C+D+AL)+28#*2C,OD=2.5*5.0mm,BLACK PVC JACKET.(BC Wire)	1	PCS

ROLINE USB 2.0 Flat Cable, type A-B, black, 1.8 m

Item	11.02.8868	
Draw	Sam	Date: 2014.12.05
Approval		
Duty	F16	BOM.NO:10584
Sample NO.		

SECOMP

Drawings of 1 (2) | Proportion: 1:1 | Unit(mm) | A4

RoHS Compliant



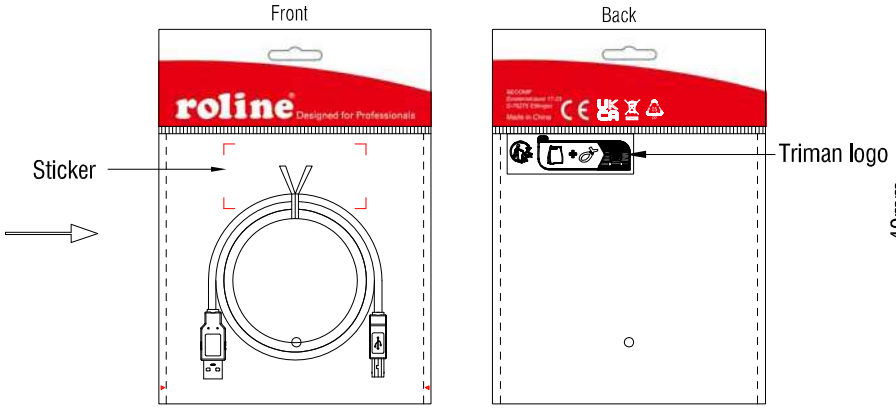

1PCS/RLA BAG-M (0.15*170*205mm)+Sticker

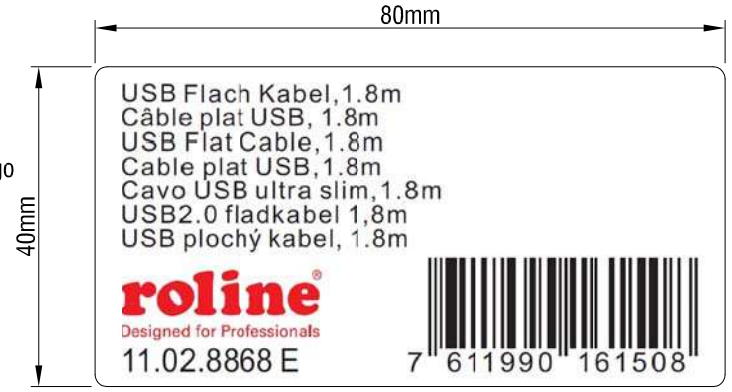

Sticker

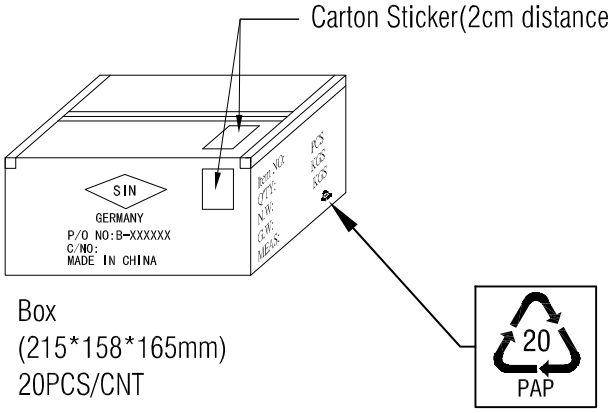

Box
(215*158*165mm)
20PCS/CNT

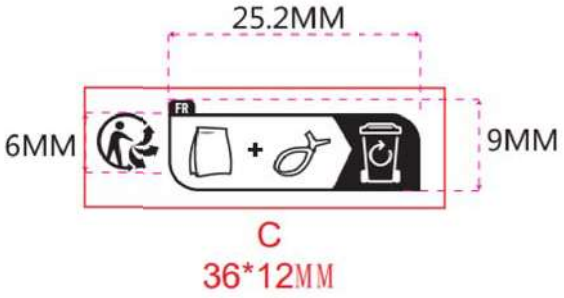

Triman logo

Carton Sticker

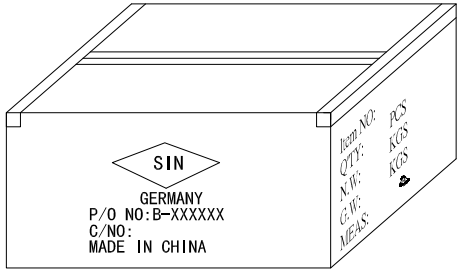

Carton Size:
(450*330*180mm)
80PCS/CTN

ROLINE USB 2.0 Flat Cable, type A-B, black, 1.8 m			
Item	11.02.8868		
Draw	Sam	Date: 2014.12.05	
Approval			
Duty	F16	BOM.NO:10584	
Sample NO.		Drawings of 2 (2)	Proportion: 1:1 Unit(mm) A4

SECOMP