



20000+200-0mm

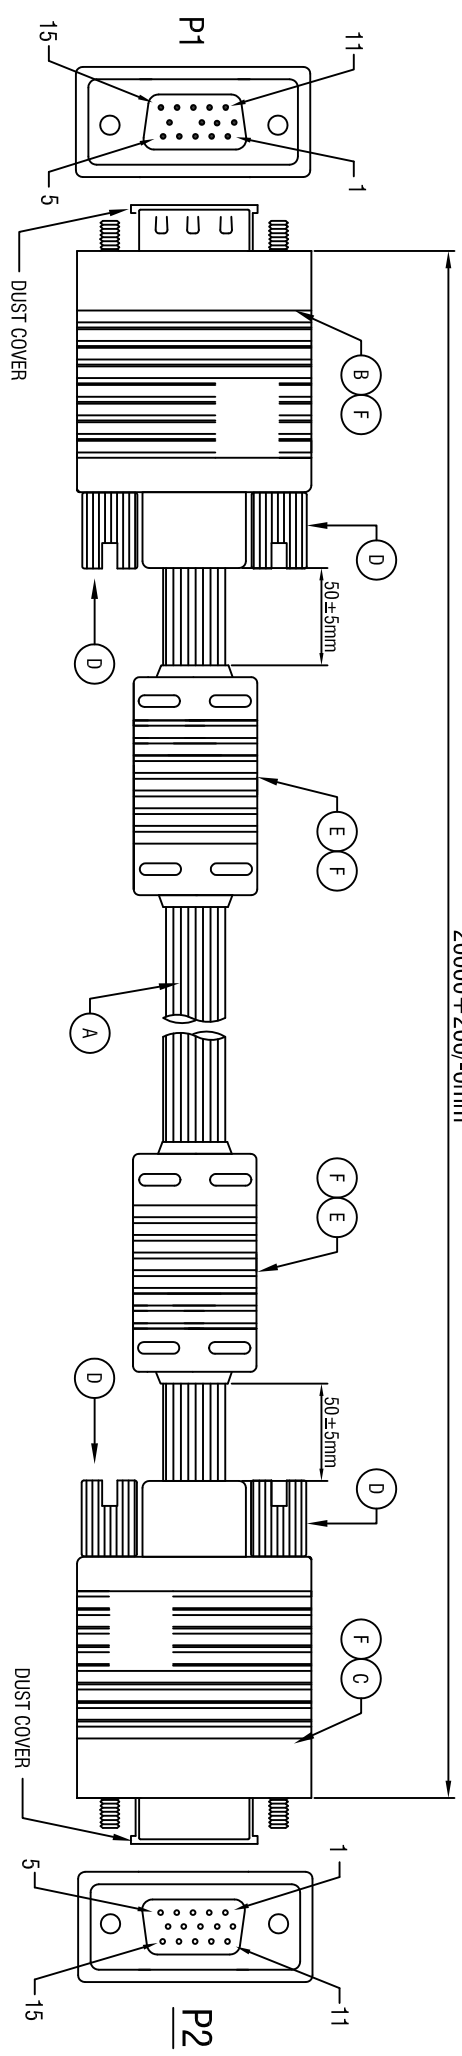

WIRE ADDRESS

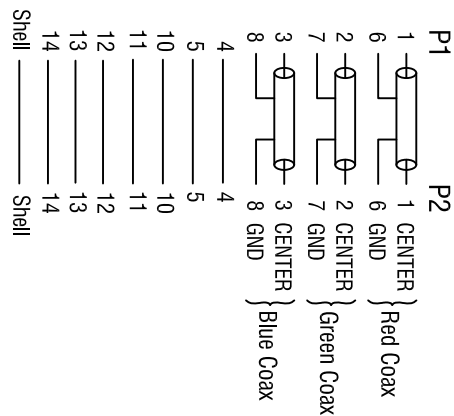

Electrical Test:
 1.100% TEST OPEN SHORT MIS-WIRE.
 2.CONTACT RESISTANCE:20Ω MAX.
 3.INSULATION RESISTANCE:5MΩ MIN.
 4.HI-POT:300V DC/10MS.
 5.Real Test Passed 1280*1024.
 6.Real Test Not Twinkling,Double Vision and Decolor.

F	4SP BLACK PVC	G
E	Ferrite Core (17.5*28.5*9.5mm)	2 PCS
D	HD37.7 Screw	4 PCS
C	HDB15P FEMALE (PIN9 OUT, Black Insulator Nickel Plated)	1 PCS
B	HDB15P MALE (PIN9 OUT, Black Insulator Nickel Plated)	1 PCS
A	UL2919,28# 300AX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	1 PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity Unit

ROLINE HQ VGA Cable with Ferrite, HD15 M - HD15 F, 20m	
Item	11.04.5370
Draw	<i>Make</i> Date: 2020.05.13
Approval	
Duty	F16 BOM.NO:

