

DisplayPort Male


DisplayPort Male

**ELECTRICAL TEST:**

- 1.100% OPEN SHORT SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)DC 300V/10ms
- 4.measured 4 k \* 2 k @ 60 hz

11.04.5920	1000±30 mm
11.04.5921	2000±30 mm
11.04.5922	3000±50 mm

**Pin Assignment**

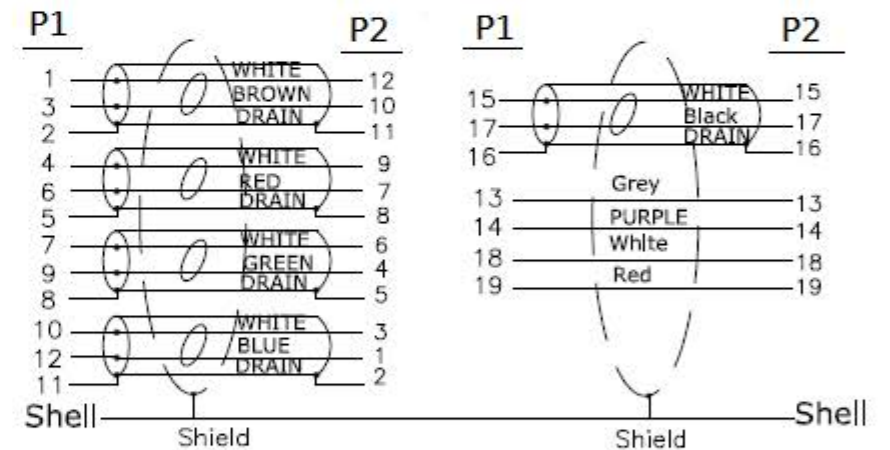

9	Heat shrinkable TUBE~ φ 1.5MM~BLACK	0.05	m
8	Heat shrinkable TUBE~ φ 1.0MM~BLACK	0.1	m
7	Heat shrinkable TUBE~ φ 2.5MM~BLACK	0.015	m
6	DisplayPort (DP1688#) M ABS SHELL Painted golden UP	2	pcs
5	DisplayPort (DP1688#) M ABS SHELL Painted golden DOWN	2	pcs
4	Transparent PE LDPE	5	g
3	45P ROHS PVC ROHS	12	g
2	DisplayPort M W/LATCH BLACK INSULATION SHELL PLATED;GOLD PIN;5u	2	pcs
1	DisplayPort(26AWG*1PR+EAM)*5+26AWG*5C+AEB(AL)85%, OD: 8.3mm Black + black/golden mesh (32/3/0.2mm)	L	m
NO	DESCRIPTION	Q'TY	UNIT

REV	ECN	 TOLERANCE INCHES M/M		 ROLINE GOLD DisplayPort Cable DP M/M, 1.4v, black/golden		
.X	.015					.30
.XX	.010					.10
.XXX	.005					.05
DRAWN BY		Zhouwl		11.04.5920, 11.04.5921, 11.04.5922		
CHECK BY				SCALE	NONE	
APPD BY				UNIT	MM	
				DATE	2018.07.31	
				DRAWING NO.:	REV. A01	
					1/2	