


NOTE:

- Electrical test:
  - 100% open short & miss wire test;
  - Insulation resistance:DC 300V 0.01s 10M ohm min;
  - Contact resistance:3 ohm max; (5M 5 ohm max;)
- Computer + Monitor test
  - Resolution:3840\*2160@60Hz
- Marking:Display Port Cable
- RoHS(EU2015/863) and REACH Compliant

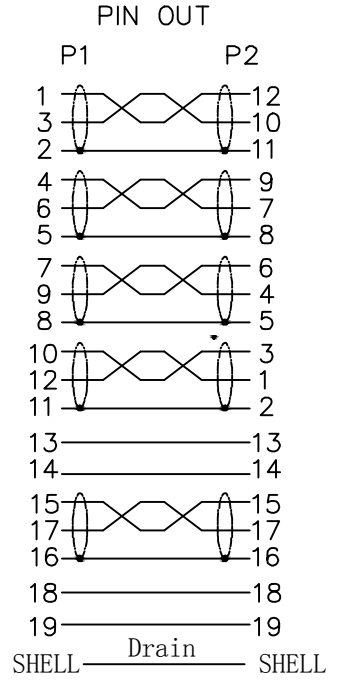

MATERIAL LIST:

⑥	Dust Cap	LD PE	2	
⑤	TUBE END	BLACK PVC 45P	2	
④	INNER COVER	LD PE	2	
③	OUTER COVER	DP 20PIN MALE BLACK ABS ASSEMBLY TYPE	2	
②	CONNECTOR	DP 20P/M WITH LATCHING SOLDER TYPE, BLACK INSULATION, THE PIN GOLD PLATED THE SHELL FOR Gold PLATED	2	
①	CABEL	[(30AWG BC)*1P+D+FAM]*5+(30AWG BC)+HDPE*4C+ADB TPE/BLACK JACKET, OD:6.0±0.2MM	1	

ITEM No.	LENGTH
11.04.5980	1000±20
11.04.5981	1500±30
11.04.5982	2000±30
11.04.5983	3000±50

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
		NEW	2020-04-09	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

DESC. ROLINE DisplayPort v1.2 Cable, DP-DP, M/M, TPE

