


ELECTRICAL TEST:

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 3 OHM (MAX)
3. INSULATION RESISTANCE: 10M OHM (MIN)
4. HI-POT TEST: DC 300V/10ms

WIRE CONNECTION

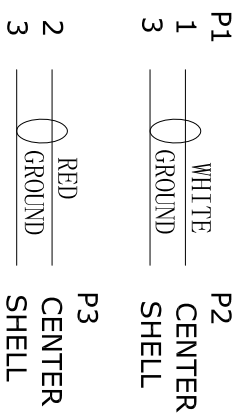

REV	ECN	TOLERANCE INCHES M/M	DESCRIPTION	DATE	NAME					
8			heat-shrinkable tubing ~ \$ 2.0MM~BLACK~	0.01	pcs					
7			TRASPARENT PE ROHS LDPE	4	g					
6			45P RED PVC ROHS	6	g					
5			45P WHITE(N-BHC 2001) PVC ROHS	6	g					
4			45P BLACK PVC ROHS	6	g					
3			RCA M SHELL PLATED:NICKEL BLACK INSULATION	2	pcs					
2			DC3.5 M SHELL PLATED:NICKEL THREE TYPE	1	pcs					
1			NO UL [7/0.127TC*1C+S(28/0.10TC)] *2F OD:2.8*2.8MM BLACK PVC	10	m					
NO			DESCRIPTION	Q'TY	UNIT	APPD BY	SCALE	UNIT	DATE	REV.
							NONE	MM	2019.10.22	AO
										1/1

SECOMP

TITLE: ROLINE 3.5mm/ 2XRCA (M) Cable 10M

P/N : 11.09.4349

CHECK BY

DATE 2019.10.22

REV. AO