



REV.	DESCRIPTION	DATE
A		2025-10-23
B		2025-12-15

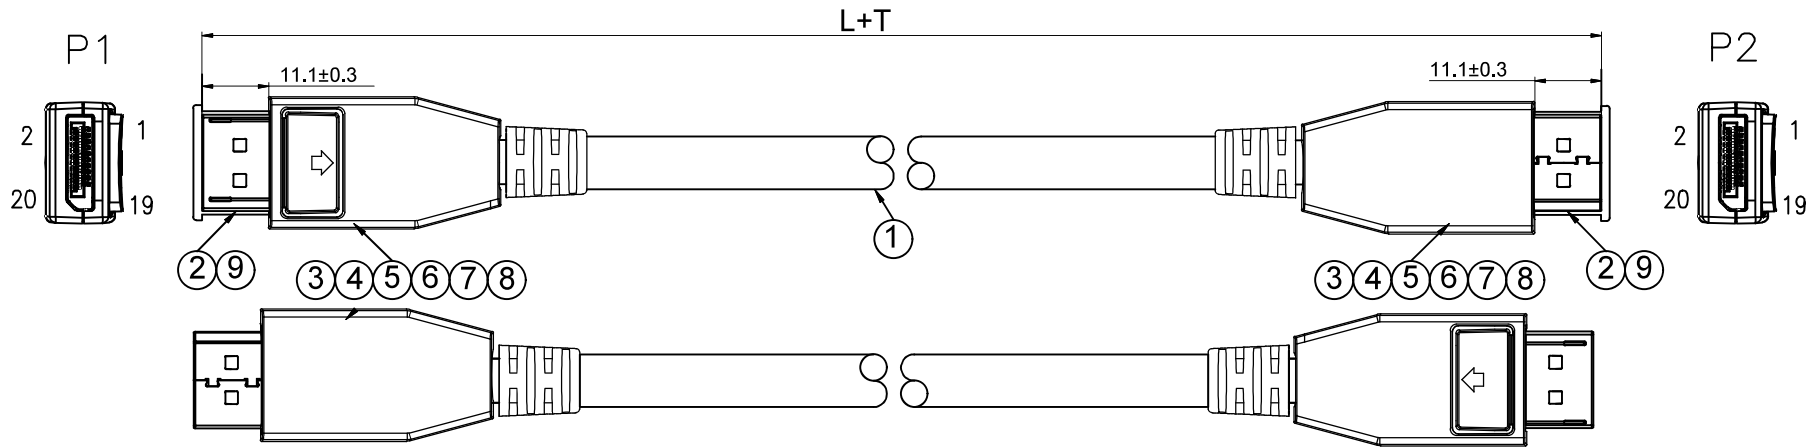

Test standard:

- 100% OPEN/SHORT TEST
- CONDUCTIVE RESISTANCE : 5 OHMS MAX
- INSULATION RESISTANCE : 5M OHMS MIN
- HI-POT : 300V DC/0.1SEC
- THE PRODUCT IS ROHS COMPLIANT.
- Functional testing requirements: Support 4k@240hz 8k@120hz 16k@60hz Audio and video, without any defects such as snowflakes,glitter, or ghosting

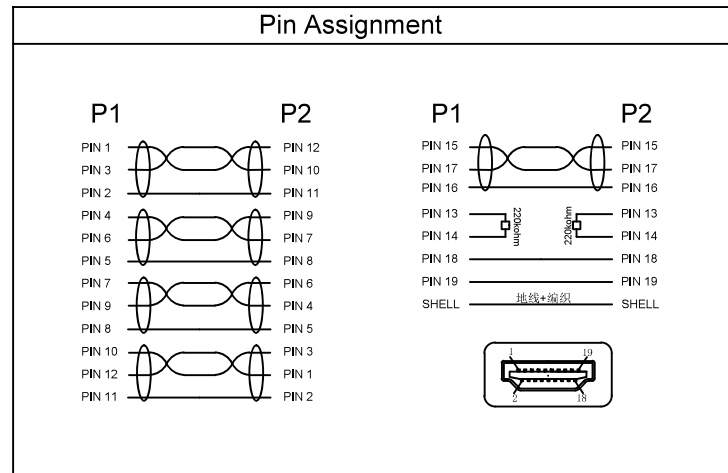

PART NO.	LENGTH
11.44.6027	3000±30mm

Number	Material Name	SPECIFICATIONS	Usage	Remarks	ITEM NUMBER	DRAWER
1	Wire	26#, (1/0. 40B*2C+MID+AL+HM)*4P+(1/0. 32B*2C+D+AL+HM)*1P+1/0. 32B*2C+F+4D+AB BLACK TPE OD7.0	1PCS		TITLE	GREEN DP v2.1 Cable,M/M,16K/80G
2	Connector	DP iron shell-gold-plated-with card slot-without PC board-with 220KΩ resistor-tin-added (Front cover orange)	2PCS			
3	Wire Clip	Large DP bracket - 036 bare wires - non - standard (5 pairs in the middle in parallel)	2PCS		MATERIAL	SCALE
4	Shield Shell	Large DP shield iron shell-upper and lower covers-with convex points-nickel plated (OD7.0 - 7.5)	2SET		REV.	UNIT
5	Copper Foil	Double-sided conductive copper foil W6*L35MM	2PCS		DRAWING NO:	mm
6	Inner Mold Material	PE transparent material	A/R			
7	SR	Black TPE	A/R			
8	Outer Rubber Shell	Large DP outer rubber shell type B - upper and lower covers	2SET			
9	Dust Cap	DP dust cap, non-directional (environmentally friendly material)	2PCS			

SECOMP