



item No.	length	Inner carton packing quantity
11.99.4326	5m±30mm	20pcs
11.99.4330	10m±100mm	15pcs

SPECIFICATION

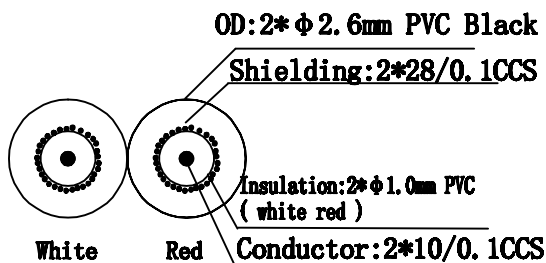

WIRING DIAGRAM

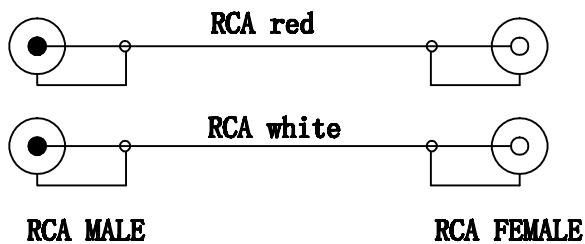

5	CONNECTORS2	RCA Female Nickel Plated	2PCS
4	MOULDED2	PVC 45P red	2*10g
3	MOULDED1	PVC 45P white	2*10g
2	CABLE	AUDIO CABLE Black	L
1	CONNECTORS1	RCA Male Nickel Plated	2PCS
NO.	PARTS NAME	SPECIFICATION STANDARD	QTY

- TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
- INSULATION RESISTANCE: 100Meg Ohm.
- WITHSTAND VOLTAGE: 300 VOLTS RMS, 1 MINUTE.
- OPERATING TEMPERATURE RANGE: -20°C TO + 75°C.
- 100% RoHS & REACH COMPLIANT.

DRAWING APPROVED _____ DATE: _____
 SAMPLE APPROVED PER DRAWING SPECIFICATIONS _____ DATE: _____

 SCALE: NONE SHEET: 1/1 DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED .X ± .XX ± .XXX ± ANGLES ± REV. 00 CUS. REV	NAME: VALUE Cinch Cable, duplex M - F, black ITEM NO.: 11.99.4326/11.99.4330 CUS. P/N: 2xRCA M TO 2xRCA F DRAWING NO.: MW-SIN -004	 ENG. DATE CHECKED DATE APPROVED DATE
---	---	--

01	NEW ISSUE	2018.03.22
REV.	MODIFY DESCRIPTION	DATE