



SPECIFICATION: 30AWG (7/0.1BC*1P+7/0.1CCS+AL)*5PCS+7/0.1CCS*4C+AL+7/0.12CCS+128/0.12ALM+PVC(REACH) 6.0±0.2mm

| ITEM | SPECIFICATION | |
|-----------------|-----------------|--|
| CONDUCTOR | AWG | 30 AWG |
| | MATERIAL | BC |
| | COND. SIZE | 7/0.10BC±0.01mm |
| INSULATION | MIN. AVG. THICK | 0.20mm |
| | MATERIAL | FM-PE+SKIN |
| | OD | 0.75±0.05mm |
| TWISTED PAIR | NO. | 1P*5C |
| | AWG | 30 AWG |
| | MATERIAL | BC+CCS |
| SPREAD AL. FOIL | COND. SIZE | (7/0.10BC±0.01mm)*2+(7/0.10CCS±0.01mm)*1 |
| | SIZE | 8mm |
| MYLAR | COVERAGE | 125% |
| | SIZE | 14mm |
| DRAIN | COVERAGE | 125% |
| | MATERIAL | CCS |
| BRAID | SIZE | 7/0.12CCS±0.01mm |
| | MATERIAL | AL-MG ALLOY |
| | COVERAGE | 85% |
| JACKET | SIZE | 8mm |
| | MATERIAL | BLACK PVC |
| | COLOUR | BLACK |
| | O.D | 6.0±0.2mm |

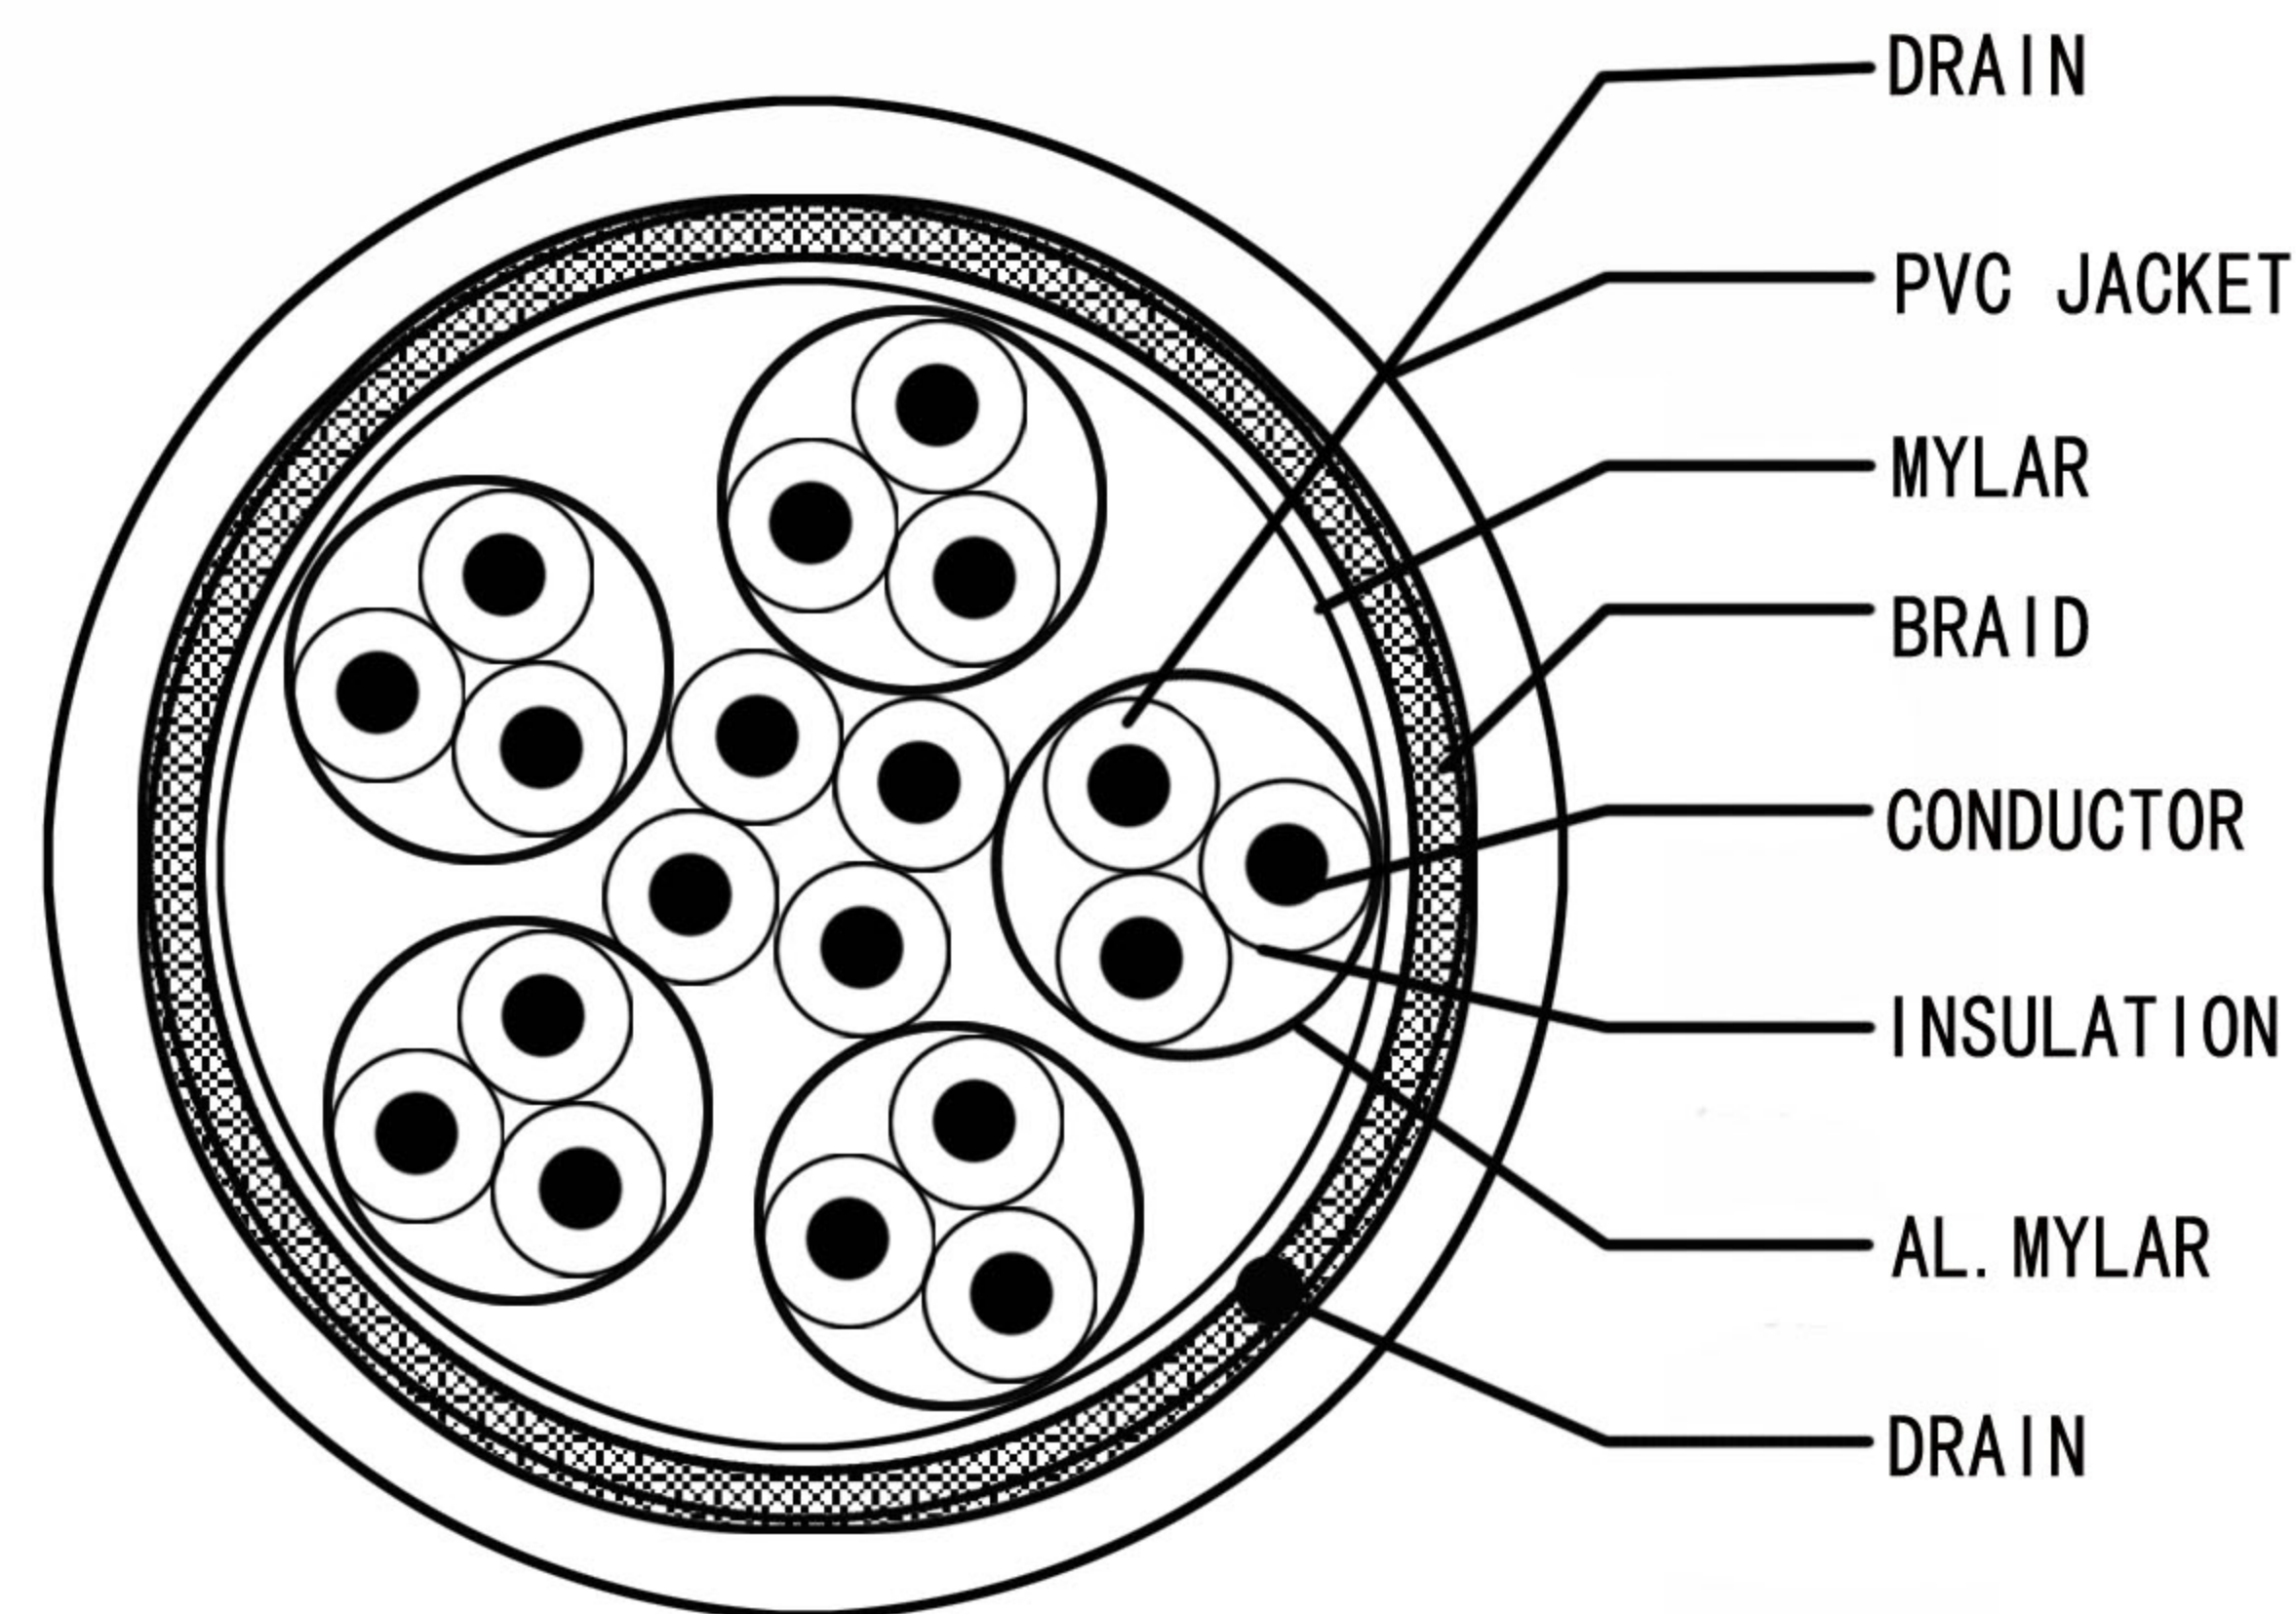

ELECTRICAL:HDTV-DVD TEST:1080P

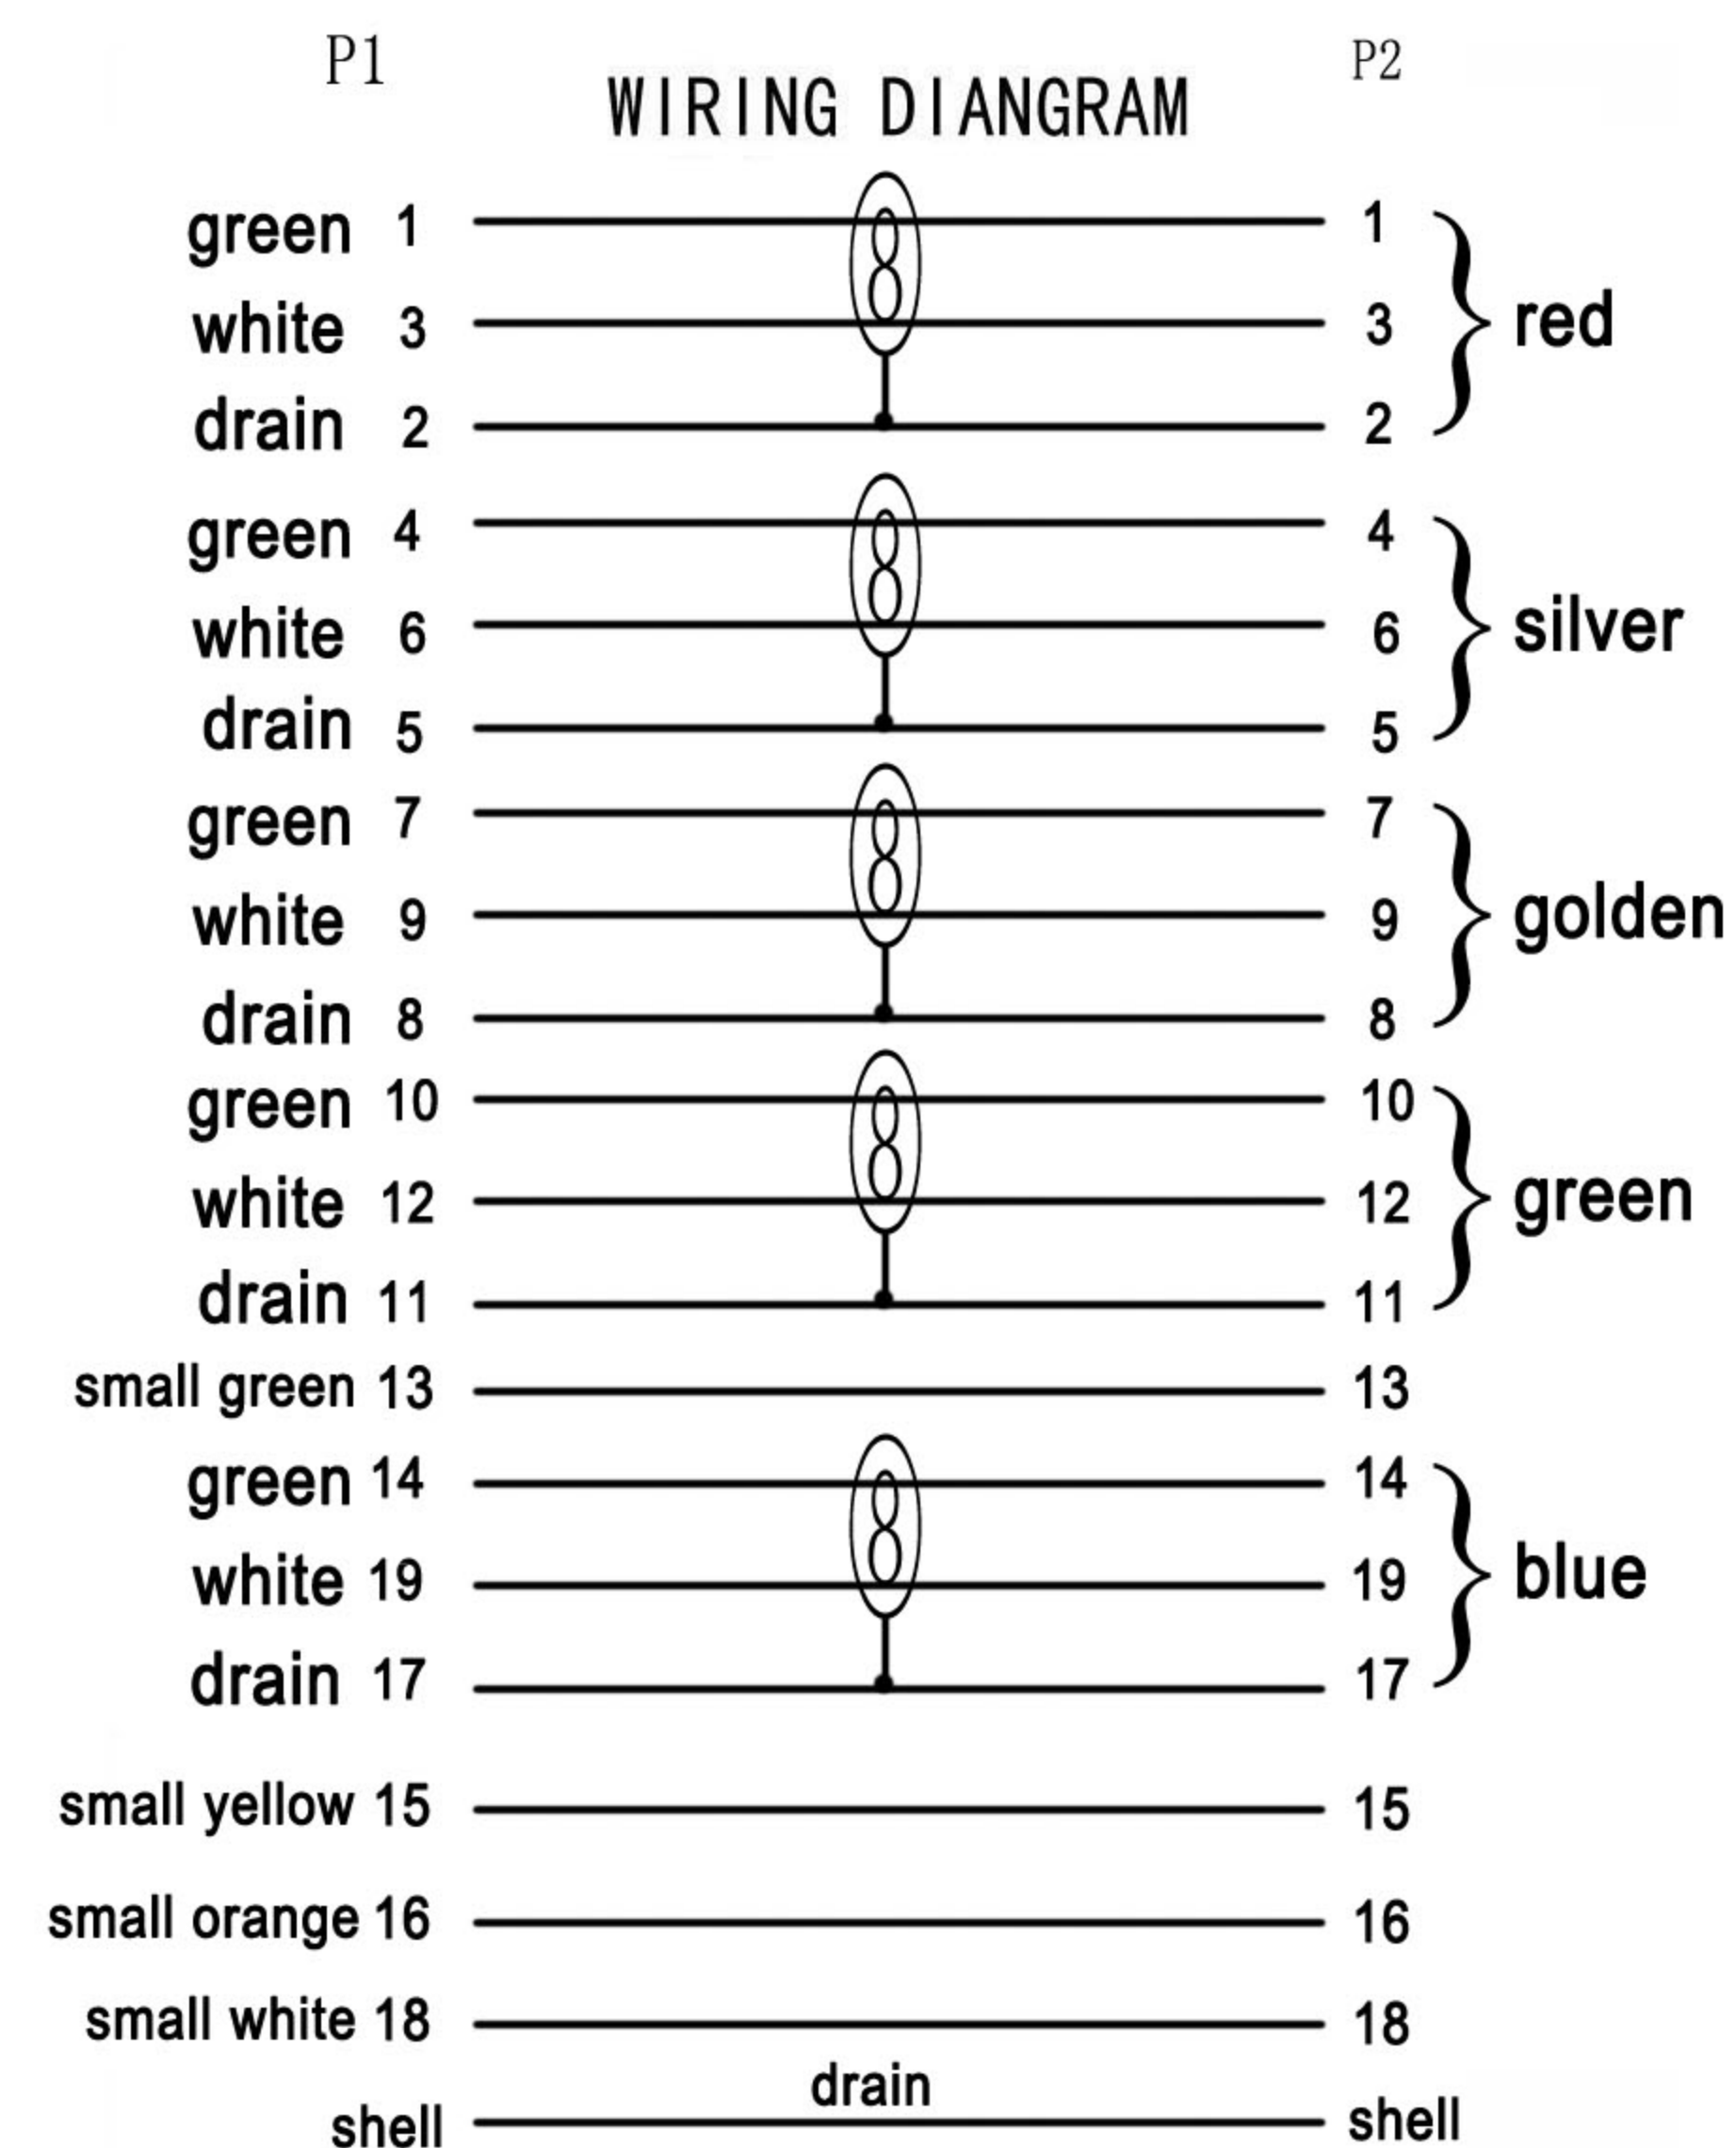

SECOMP

VALUE HDMI High Speed Cable with Ethernet, M - M

CHECKED: Zhang Guo Yu

APPROVED: Liu Wen Jun

DRAWING: Zhuang Qing Yan

CUSTOMER:

DESIGN: Liu Ting Feng

DATE: 2017.11.22

MODEL NO. : 11.99.5541 (1M)
 11.99.5531 (1.5M)
 11.99.5542 (2M)
 11.99.5543 (3M)
 11.99.5545 (5M)