



CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0		2022/06/28	

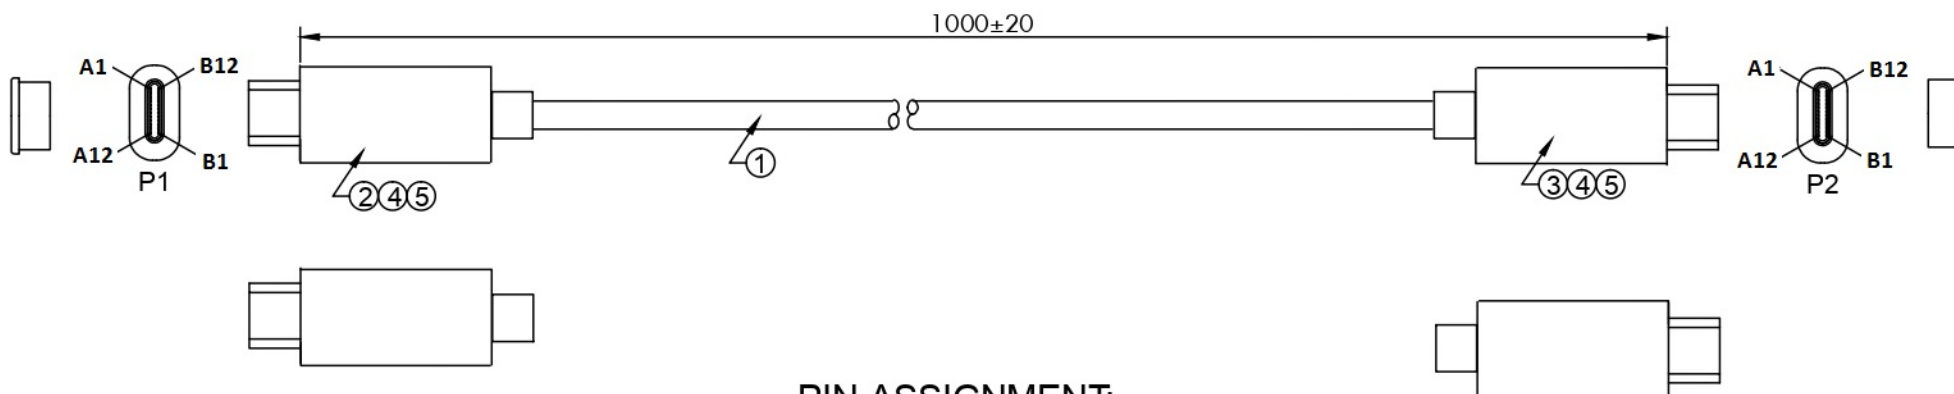

### PIN ASSIGNMENT:

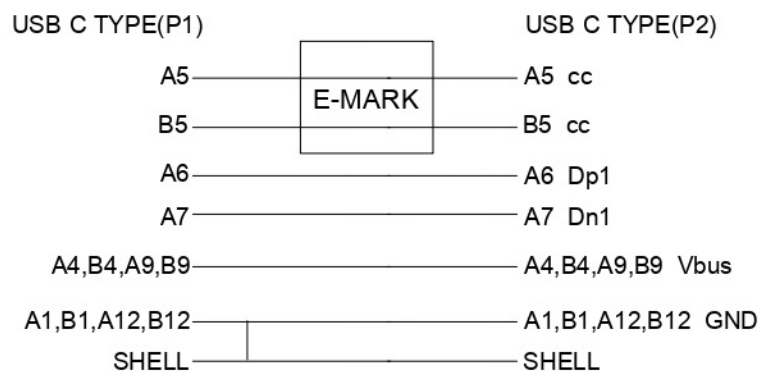

#### NOTE:

1. Electronic test
    - 1.1 Open/short 100% test
    - 1.2 Insulation resistance: 10MΩ Min
    - 1.3 Conductor resistance: 3Ω Max
  2. Maximum current: 5A  
E-Mark IC with PD3, 100W( E-MARK Hynetek semiconductor)
- RoHS (2011/65/EU) AND (2015/863/EU) AND REACH COMPLIANT

⑤	DUST COVER	TRANSPARENT PE	2	
④	OUTER MOLD	PVC/BLACK	2	
③	C MALE	USB TYPE C MALE ,GOLD PLATED PIN,NICKEL PLATED SHELL	1	
②	C MALE	USB TYPE C MALE WHITE E-MARK,GOLD PLATED PIN,NICKEL PLATED SHELL	1	
①	CABLE	32AWG(1/0.20 TC)*1P+32AWG(1/0.20 TC)*2C+22AWG(45/0.1TC)*2C+AM+22AWG(45/0.1TC) BRAID+JACKET,TPE/BLACK,OD4.5±0.2MM	1	
NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS

Desc. VALUE USB 2.0 Charging/Data Cable, CM-CM, PD3.0, 100W, black  
Item No. 11.99.8308

**SECOMP**

MAPE	TOLERANCE
	X. ±1.00
	X.X ±0.50
DRAW BY	SCALE MM
	PAGE 1/1