


RoHS Compliant

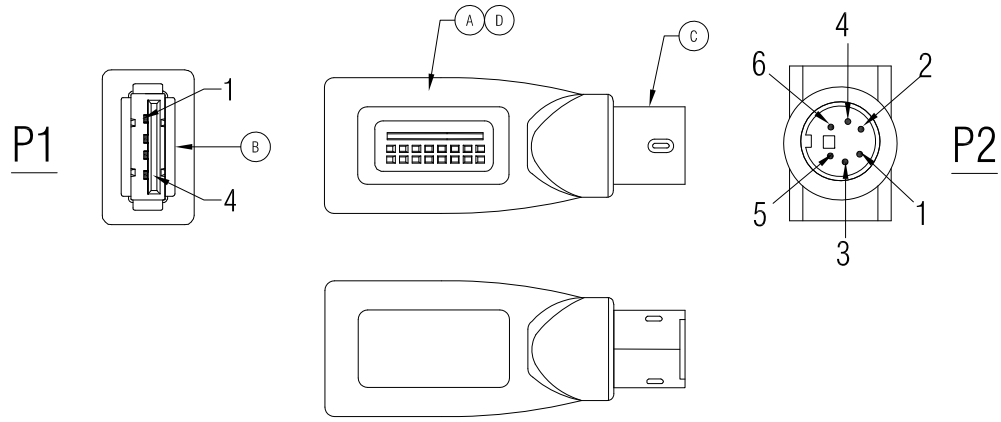

WIRE ADDRESS

<u>P1</u>	<u>P2</u>
1	4
2	1
3	5
4	3

Electrical Test:  
 1.100% TEST OPEN SHORT MIS-WIRE.  
 2.CONTACT RESISTANCE:3Ω MAX.  
 3.INSULATION RESISTANCE:5MΩ MIN.  
 4.HI-POT:300V DC/10MS.

D	45P PVC Purple		G
C	MD6P MALE(Black Insulator,Nickel Plate)	1	PCS
B	USB 2.0 A FEMALE(White Insulator,Nickel Plate)	1	PCS
A	UL1007 28# WIRE PVC JACKET		PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

VALUE PS/2 to USB Adapter,Keyboard,purple		
Item	12.99.1073	
Draw	Sam	Date: 2015.01.20
Approval		
Duty	F16	BOM.NO:13390

