

ATEN Control System

VK2200 Control Box Gen. 2

VK1200 Compact Control Box Gen. 2

The **ATEN Control System**, incorporating the **ATEN Control Box (VK2200 / VK1200)**, the **ATEN Configurator (VK6000)**, and the **ATEN Control System App**, is a standard Ethernet-based management system that connects all hardware devices within a room setting, such as boardrooms and lecture halls, to provide direct, centralized control effortlessly via a mobile device or tablet computer. The **VK2200 / VK1200 Control Box** works as the main controller that provides connectivity to all hardware devices via a spate of connection interfaces, including bi- and unidirectional serial, relay, IR, digital I/O, and 12 V DC power output ports, as well as dual LAN ports. After connecting the hardware, the **VK6000 Configurator** software provides simple setup of the devices with easy step-by-step configuration. The **ATEN Control System App** then is granted remote control access by the **VK2200 / VK1200 Control Box** from any iOS, Android or Windows mobile device / tablet computer, thereby empowering you with the mobility to control all hardware devices, across different rooms, whenever and however you like.

The **VK2200 / VK1200 Control Box** can be easily deployed into an existing installation by seamless integration with ATEN VanCryst Pro-AV products as well as nearly any hardware device found in a room, including AV equipment, lighting, conference systems, air conditioning, motion sensors, power switches, and many more. It serves as the central platform through which hardware devices are connected — to be managed and controlled directly via user-defined GUI from any iOS, Android or Windows mobile device.

VK2200 / VK1200 features dual, isolated LAN ports, namely its Control LAN, a dedicated LAN port allowing AV devices to be isolated from the corporate network for fulfilling high-security demand, and the other LAN port for connecting to ATEN Unizon, a centralized platform streamlining daily AV/IT management, troubleshooting, and maintenance. Equipped with a high-performance processor, embedded with quad-core CPU and 2 GB / 1 GB memory, **VK2200 / VK2200** is able to provide real-time statuses and process complex, customized GUI designs, as well as multi-users' access control to the devices connected, making it the perfect solution for managing mass device deployments especially in a strict security setting with high performance requirements, such as government agencies, military facilities, corporate organizations, and healthcare institutions.

VK2200 Front view



VK2200 Rear view



VK1200 Front view



VK1200 Rear view



Features

VK2200 / VK1200 Control Box

- High performance processor embedded with quad-core CPU and 2 / 1 GB memory for designing and controlling complex projects
- Dual, isolated LAN for secured communication among IT devices
- Supports various interface connections for hardware-software integration and mobile device control
- DC outputs for power supply connections
- USB port for easy project upload
- LCD display shows the option for configuration and information display
- IR learning function for adding IR device drivers
- Supports native KNX IP for building management systems
- Telnet, TCP, UDP, HTTP, HTTPS, ONVIF, and PLink compliant
- Supports centralized control and management by ATEN Unizon™.
- Supports project file backup
- Web GUI for easy system configuration
- Supports SSH communication for data monitoring
- LED indication of connection and hardware status
- 2 free licenses for mobile control*

Note: If you require more than 2 licenses, contact the local sales representative. For more information on licenses, see Specifications.

Installation Setup

Connect hardware




Configure settings



Download app



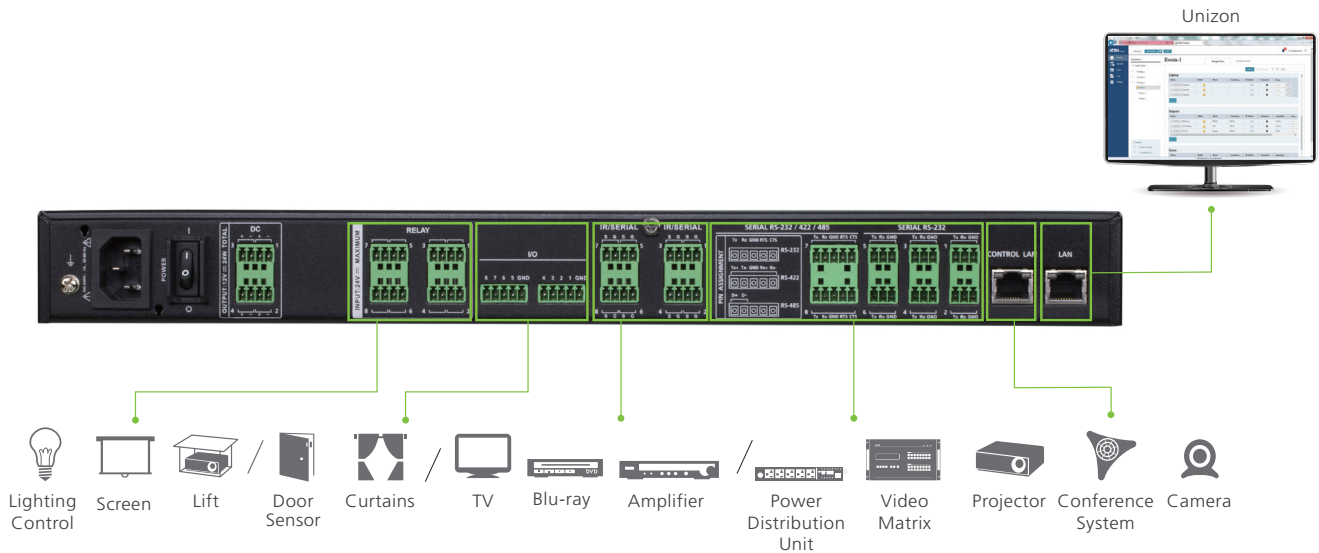

Highlights

The latest generation of the ATEN Control Box

The latest generation of the ATEN Control Box is designed with major enhancements to satisfy even the most complex of setups, and features:

More Processing Power and Memory	High performance processor embedded with quad-core CPU and 2 / 1 GB memory for designing and controlling complex projects.
Higher Level of Security	Dual, isolated LAN design supporting secured communication protocols such as HTTPS and SSH.
Major Software Upgrades	Advanced drivers with bidirectional control and feedback as well as 4 times more software objects such as buttons and macros.
Centralized Management	ATEN Unizon™ support for centralized management of devices across rooms, floors and even buildings.
LCD Display	LCD display shows the option for configuration and information display

The advantages of the ATEN Control System

The ATEN Control System has been developed with a series of advantages making it easily adaptable to varying applications in a wide range of settings, including but not limited to corporate and education facilities and conference halls or any other space that requires complete control.

Control Automation	Your devices can interact and respond to each other intelligently through pre-programmed actions to perform a fully automated series of advanced operations.
Real-time Synchronization	Equipment status synchronizes in real-time across all control interfaces for conflict-free control among multiple simultaneous users.
Simplified Configuration	Easy setup up control sequences without extensive programming knowledge and decrease time spent on manual configuration with our advanced driver database.
Effortless Expansion	Highly expandable with a wide range of ATEN expansion boxes, access to device drivers, and support for popular control standards and protocols including KNX, over IP, HTTP(s), Telnet, TCP, UDP.
User-centered Convenience	An advanced, single-software solution enabling users to create their own control interfaces for any mobile device. Specific needs can be efficiently tailored by selecting from a database of control actions and GUIs for effortless deployment.
Mobile Control	Support for iOS, Android and Windows mobile devices facilitates centralized control of different rooms via user-defined profiles with simple point-n-tap operations.
Integration Partners	ATEN collaborates with professional AV partners to provide complete solutions for applications of all sizes.

Specifications

	VK2200	VK2100
Memory		
SDRAM	2GB	1GB
Flash	8GB	8GB
Interfaces		
Serial	<ul style="list-style-type: none"> • 2 x Programmable Bidirectional RS-232 / 422 / 485 Port (2 x 5-Pole Terminal Block Connector, configurable via pin assignments) <ul style="list-style-type: none"> – Baud Rate: 300 ~ 115200 (default: 9600) – Data Bit: 8 (default) or 7 – Stop Bit: 1 (default) or 2 – Parity: None (default), Even or Odd – Flow Control: None (default) or RTS / CTS • 6 x Bidirectional RS-232 Port • (6 x 3-Pole Terminal Block Connector) <ul style="list-style-type: none"> – Baud Rate: 300 ~ 115200 (default: 9600) – Data Bit: 8 (default) or 7 – Stop Bit: 1 (default) or 2 – Parity: None (default), Even or Odd 	<ul style="list-style-type: none"> • 1 x Programmable Bidirectional RS-232/422/485 Port (1 x 5-Pole Terminal Block Connector, configurable via pin assignments) <ul style="list-style-type: none"> – Baud Rate: 300 ~ 115200 (default: 9600) – Data Bit: 8 (default) or 7 – Stop Bit: 1 (default) or 2 – Parity: None (default), Even or Odd – Flow Control: None (default) or RTS/CTS • 1 x Bidirectional RS-232 Port (1 x 3-Pole Terminal Block Connector) <ul style="list-style-type: none"> – Baud Rate: 300 ~ 115200 (default: 9600) – Data Bit: 8 (default) or 7 – Stop Bit: 1 (default) or 2 – Parity: None (default), Even or Odd
IR/Serial	<ul style="list-style-type: none"> • 8 x Programmable IR / Unidirectional RS-232 Port (4 x 4-Pole Terminal Block Connector) <ul style="list-style-type: none"> IR: TTL level (0 to 5 V) <ul style="list-style-type: none"> – Carrier Frequency: 10 ~ 455 kHz Serial: Unidirectional RS-232 (0 ~ 5 V) <ul style="list-style-type: none"> – Baud Rate: 300 ~ 115200 (default: 9600) – Data Bit: 8 (default) or 7 – Stop Bit: 1 (default) or 2 – Parity: None (default), Even or Odd 	<ul style="list-style-type: none"> • 2 x Programmable IR / Unidirectional RS-232 Port (2 x 2-Pole Terminal Block Connector) <ul style="list-style-type: none"> IR: TTL level (0 to 5 V) <ul style="list-style-type: none"> – Carrier Frequency: 10 ~ 455 kHz Serial: Unidirectional RS-232 (0 ~ 5 V) <ul style="list-style-type: none"> – Baud Rate: 300 ~ 115200 (default: 9600) – Data Bit: 8 (default) or 7 – Stop Bit: 1 (default) or 2 – Parity: None (default), Even or Odd
Relay	<ul style="list-style-type: none"> • 8 x Relay Channel (4 x 4-Pole Terminal Block Connector) • Normally open, isolated Relays • Contact Rating: Max 24 V DC, 2 A 	<ul style="list-style-type: none"> • 4 x Relay Channel (2 x 4-Pole Terminal Block Connector) • Normally open, isolated Relays • Contact Rating: Max 24 V DC, 2 A
I/O	<ul style="list-style-type: none"> • 8 x Programmable Digital Input / Output Channel (2 x 5-Pole Terminal Block Connector) <ul style="list-style-type: none"> Digital Output: 300 mA sink from 24 V DC Digital Input: <ul style="list-style-type: none"> – VDC Mode <ul style="list-style-type: none"> Input Voltage Range: 0 ~ 24 V DC Programmable Range: 1 ~ 24 V DC – Dry Contact Mode <ul style="list-style-type: none"> Pull-up 2 kΩ to + 12 V DC 	<ul style="list-style-type: none"> • 2 x Programmable Digital Input / Output Channel (1 x 3-Pole Terminal Block Connector) <ul style="list-style-type: none"> Digital Output: 300 mA sink from 24 DC Digital Input: <ul style="list-style-type: none"> – VDC Mode <ul style="list-style-type: none"> Input Voltage Range: 0 ~ 24 V DC Programmable Range: 1 ~ 24 V DC – Dry Contact Mode <ul style="list-style-type: none"> Pull-up 2 kΩ to + 12 V DC
Ethernet	<ul style="list-style-type: none"> • 2 x RJ-45 Female, 10 / 100 / 1000 Base-T • Supported Protocol: ARP, ICMP, TCP/IP, DHCP, HTTPS, SSH Control LAN: <ul style="list-style-type: none"> • Support DHCP Server • DHCP mode - The following default IP settings will be used if no IP is assigned within 30 seconds: <ul style="list-style-type: none"> IP: 192.168.0.60 Subnet Mask: 255.255.255.0 LAN: <ul style="list-style-type: none"> • DHCP mode - The following default IP settings will be used if no IP is assigned within 30 seconds: <ul style="list-style-type: none"> IP: 192.168.1.60 Subnet Mask: 255.255.255.0 	<ul style="list-style-type: none"> • 2 x RJ-45 Female, 10 / 100 / 1000 Base-T • Supported Protocol: ARP, ICMP, TCP/IP, DHCP, HTTPS, SSH Control LAN: <ul style="list-style-type: none"> • Support DHCP Server • DHCP mode - The following default IP settings will be used if no IP is assigned within 30 seconds: <ul style="list-style-type: none"> IP: 192.168.0.60 Subnet Mask: 255.255.255.0 LAN: <ul style="list-style-type: none"> • DHCP mode - The following default IP settings will be used if no IP is assigned within 30 seconds: <ul style="list-style-type: none"> IP: 192.168.1.60 Subnet Mask: 255.255.255.0
V DC	<ul style="list-style-type: none"> • 4 x 12 V DC Output Port (2 x 4-Pole Terminal Block Connector) • Power Supply: 12 V DC, 2 A Max (shared by 4 ports) 	<ul style="list-style-type: none"> • 1 x 12 V DC Output Port (1 x 2-Pole Terminal Block Connector); • Power Supply: 12 V DC, 1 A Max
USB	1 x USB Type A	1 x USB Type A
Switches		
Power	1 x On/Off Switch	1 x On/Off Switch
IR Learning	1 x IR Receiver LED	1 x IR Receiver LED

	VK2200	VK2100
Panel Spec		
Resolution	128 x 64	128 x 64
Size	1.6"	1.6"
Pushbuttons		
Select	Up, Down and Enter buttons	Up, Down and Enter buttons
Reset Button	1 x Semi-recessed Pushbutton	1 x Semi-recessed Pushbutton
Power Consumption		
	AC 110 V : 5.7 W : 139 BTU AC 220 V : 6.8 W : 144 BTU	AC 110 V : 4.7 W : 81 BTU AC 220 V : 4.5 W : 81 BTU
Power		
Maximum Input Power Rating	Internal Power: 100 - 240 V AC, 50 - 60 Hz	Internal Power: 100 - 240 V AC, 50 - 60 Hz
Environmental		
Operating Temperature	0 – 50 °C	0 – 50 °C
Storage Temperature	-20 – 60 °C	-20 – 60 °C
Humidity	0 - 80% RH, Non-Condensing	0 - 80% RH, Non-Condensing
Physical Properties		
Housing	Metal	Metal
Weight	2.62 kg	1.23 kg
Dimensions (L x W x H)	43.24 x 16.32 x 4.40 cm	20.00 x 16.41 x 4.40 cm
License		
Basic (free)	2 free licenses	2 free licenses
Max. No. Allowed	32 licenses	32 licenses

Note : The ATEN Control Box comes with two free licenses which are stored in the device itself. Each time a mobile device connects to an ATEN Control Box for remote control, one license on the Control Box will be occupied. To purchase and add additional licenses to your ATEN Control Box, contact your local sales representative for more information.

Optional Expansion Boxes

Model Number	Model Name
VK224	4-Port Serial Expansion Box
VK236	6-Port IR/Serial Expansion Box
VK248	8-Channel Relay Expansion Box
VK258	8-Channel Digital I/O Expansion Box

Optional Keypads

Model Number	Model Name
VK108US	8-Button Keypad (US, 1 Gang)
VK112EU	12-Button keypad (EU, 2 Gang)

Optional Touch Panel

Model Number	Model Name
VK330	10.1" Touch Panel

Optional Rack Mount Kit (for VK1200)

Model Number	Model Name
2X-049G	Rack Mount Kit
2X-021G	Dual Rack Mount Kit

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 05/2021 V1.0

© Copyright 2021 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.

