



Eaton Environmental Monitoring Probe Gen 2

The Eaton Environmental Monitoring Probe (EMP) Gen 2 (EMPDT1H1C2) is a second-generation environmental monitoring probe for the Eaton Gigabit and Industrial Gateway Network Cards and Eaton rack PDUs including G3 (firmware 4.x or later) and G3+. The new EMP maintains all the functionality of the previous generation of sensors (temperature, humidity and dry-contact monitoring) while adding the ability to be daisy-chained (up to 3 per host), allowing multiple sensors to connect to a single host. For optimum air intake measurement within an enclosure, the EMP Gen 2 provides tie wrap mounting options for front and rear door perforation to specifically measure air flow at the intake point. This enhances the richness of rack-level environmental data for the top, middle and bottom of the rack.

Technical specifications¹

Eaton Environmental Monitoring Probe Gen 2

Type	Environmental monitoring device
Compatible with	Gigabit and Industrial Gateway Network Cards, Network Cards, Eaton rack PDUs including G3 (firmware 4.x or later), and G3+
Mounting options	The EMP Gen 2 includes bottom and side mounting capabilities for both UPS and PDU installation – see diagram below
Sensor capability	Temperature, humidity and two dry-contact sensors for expansion
Measurement accuracy	Measure temperatures from 0°C to 70°C with an accuracy of $\pm 2^\circ\text{C}$ and relative humidity from 10% to 90% with an accuracy of $\pm 5\%$
Catalog number	EMPDT1H1C2
Dimensions (H x W x D)	57.6 x 37.6 x 29.3 mm
Weight	34 g

1. Due to continuing improvements, specifications are subject to change without notice.



Eaton EMP Gen 2 installed on UPS



Eaton EMP Gen 2 daisy chained on rack PDU

Mounting options

- 1 Nylon fastener location
- 2 Tie wrap holes
- 3 Magnets
- 4 Keyholes



Powering Business Worldwide

Install, activate and accessorize

Each Eaton EMP Gen 2 sensors can support up to two additional input contact sensor devices per module, for a total of six additional sensors per rack. Stay informed and reduce risk in your application by receiving environmental notifications and automating action through the Eaton Intelligent Power Manager Editions. Additional sensors are sold separately.

Product snapshot

- **Measure** ambient temperature and humidity at the rack level
- **Monitor** the status of up to six additional contact devices/sensors
- **Display** real-time and historical status of all sensors via the intranet or Internet
- **Stay informed** of alarms via email notification
- **Act** before problems affect sensitive equipment
- **Aggregate real-time information** via EMP Gen 2 sensor

Install and activate quickly


The Eaton EMP Gen 2 sensor easily mounts within an enclosure via the four available mounting options. Nylon fasteners, tie wraps, magnets and keyhole/screw mounting options provide the versatility required to mount the sensor within any application. Once mounted, simply connect directly to your rack PDU or UPS network card and begin setting up your notification parameters.

Streamline administration via sensor consolidation

Utilizing the EMP Gen 2 sensor as a hub, allows users to directly connect the door contact sensor, water leak detection sensor, vibration sensor and smoke detector via the available dry-contact sensors on the probe. Stay informed 24/7 about what is happening at the individual rack level, rather it be security or environmental concerns.

Eaton EMP Gen 2 sensor accessories	Part number
Door contact sensor	DCS001
Water leak detector	WLD012
Vibration detector	VIB001
Smoke detector	M12
PIR motion detector	XCELW

* Power supplies required in addition to smoke detector/alarm option part number

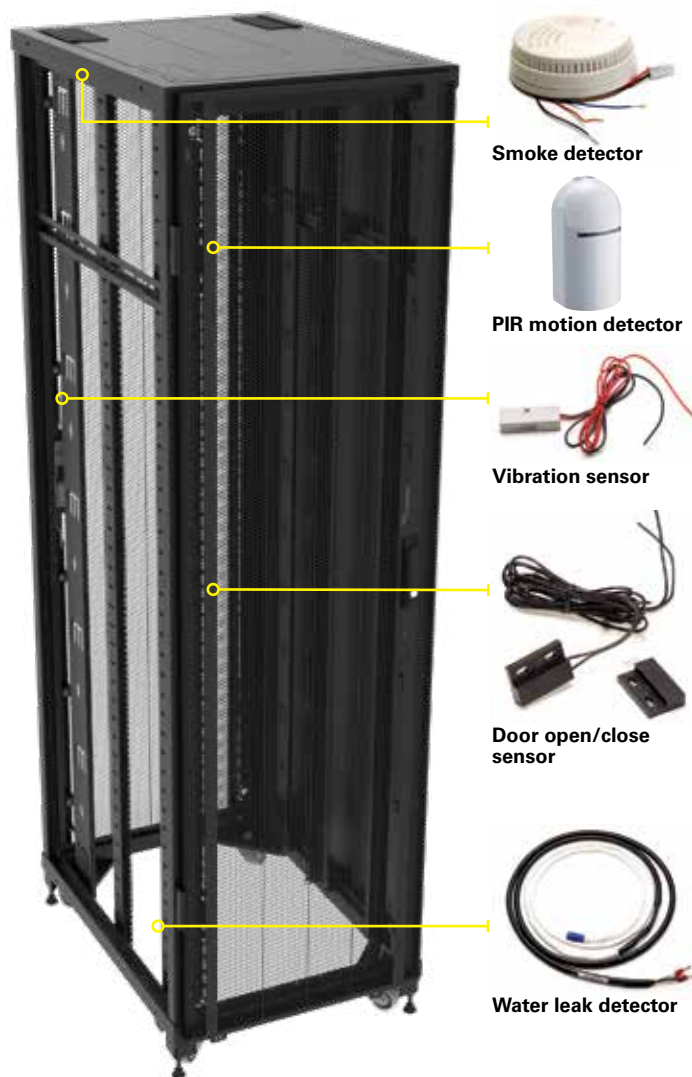

For more information, please visit:
Eaton.eu/EMPGen2