

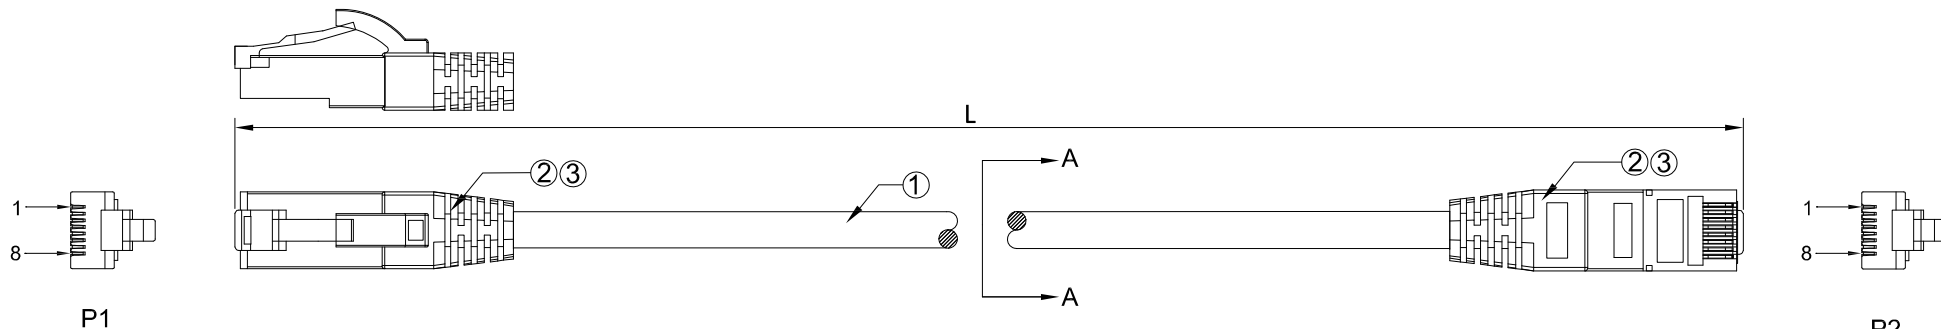


MOLDING:
YUS-28

DATE	REV.	REVISION	DRAW	CHECKED
2026. 02. 07	A/0	NEW	LMF	

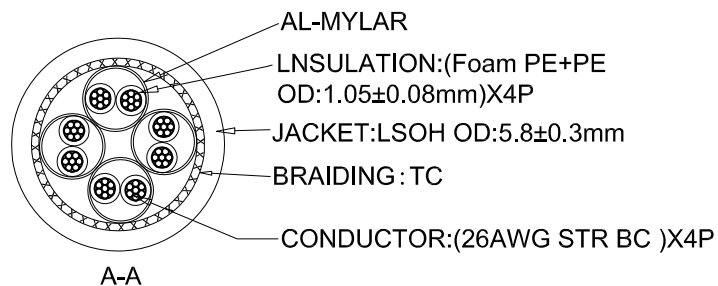

Marking:YFC CAT.7 S/FTP LSOH 26AWGX4P PATCH 3P VERIFIED TO ANSI/TIA-568.2-D &
ISO/IEC 11801-1 & EN 50288-4-2 & IEC 60332-1-2



PINOUT			
P1(T568B)		P2(T568B)	WIRE
1		1	WHITE/ORANGE
2		2	ORANGE
3		3	WHITE/GREEN
6		6	GREEN
4		4	BLUE
5		5	WHITE/BLUE
7		7	WHITE/BROWN
8		8	BROWN
Shield		Shield	BRAID

Note:

- 1.Channel Test
- 2.100% Test(Open,short,miswire)
- 3.Contact Resistance:2Ω max.
- 4.Insulation Resistance:DC/250V,10MΩ MIN,0.01S
- 5.Hi-pot Test:AC/250V 5mA Max. For 0.01s
- 6.All Material meet the RoHS and REACH
- 7.Minimum of the bending radius ≥25mm

PID	Cable Color	Molding Color	Length(mm)	Size(mm)
21.15.0854	GY852	GY852	500±20	114~140
21.15.0851	GY852	GY852	1000±30	114~140
21.15.0852	GY852	GY852	2000±30	114~140
21.15.0853	GY852	GY852	3000±30	114~140
21.15.0855	GY852	GY852	5000±50	160~180

SECOMP

7. Minimum of the bending radius ≥25mm										Unless specified on the drawing, tolerances are per the follows: X. ±0.20 X° ±3 .X ±0.10 .X° ±0.3 .XX ±0.05		DRAW. NO	GFWC-S260012	TITLE	ROLINE CAT. 7 S/FTP 26AWGx4P CABLE, LSOH, GREY		
③	Molding	PVC 70P							A/R								
②	Plug	8P8C 50u" Shielded Hole Diameter:1.1mm							2PCS								
①	Cable	CABLE CAT.7 S/FTP 26AWG*4P LSOH GREY (GY852)							A/R			DRAW	LMF	DATE	2026. 02. 06		
No.	TITLE	DESCRIPTION							Q' TY		SCALE	NONE	CHECK	此图已 审核 求正像	DATE		
Cable Spec NO.	GFWL-C240095	Part Number	--	Note	RoHS	Reach	GP	HF	Other		UNIT	mm	APPROVED		SHEET	1 OF 1	