



Datenblatt - Fiche technique - Data sheet



**21.15.2672**



ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, orange, 2,0 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, orange, 2,0 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, orange, 2.0 m

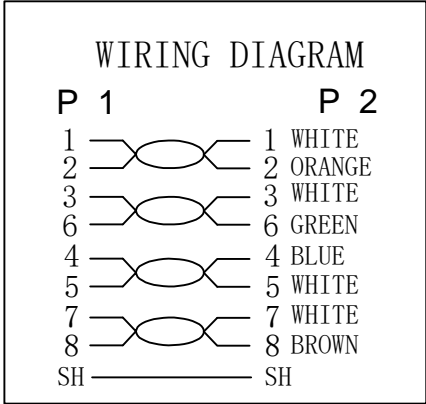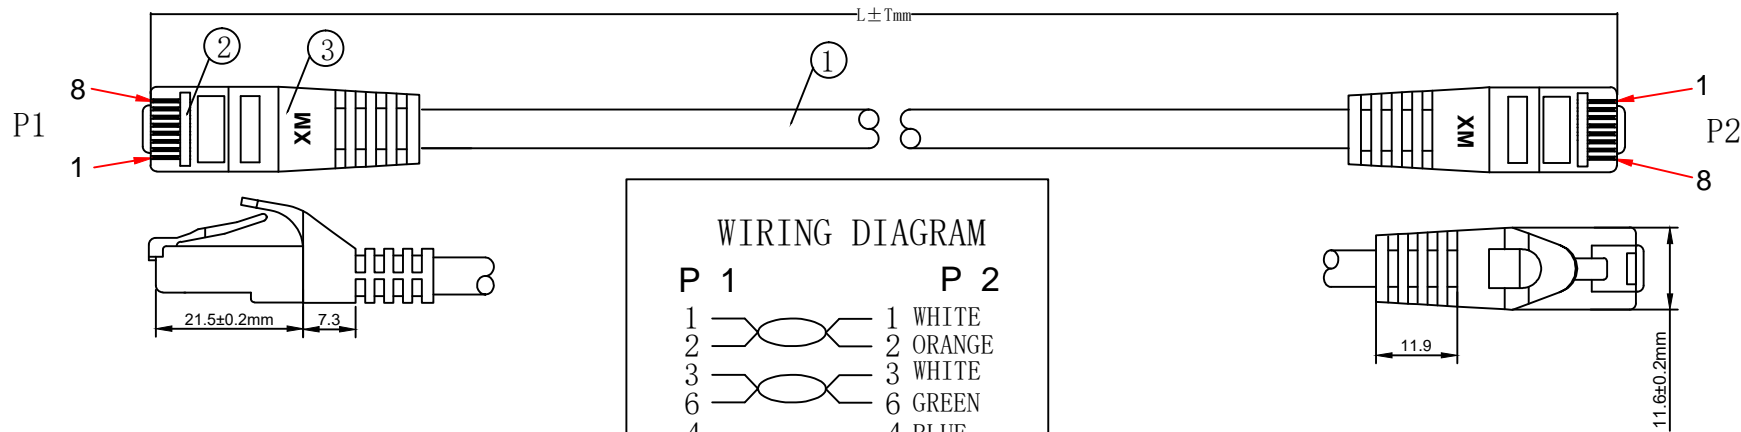

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:60mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Orange	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Orange (PANTONE:1575C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2958	300mm	± 10mm
21. 15. 2670	500mm	± 15mm
21. 15. 2671	1000mm	± 30mm
21. 15. 2674	1500mm	± 45mm
21. 15. 2672	2000mm	± 60mm
21. 15. 2673	3000mm	± 90mm
21. 15. 2675	5000mm	± 150mm
21. 15. 2676	7500mm	± 210mm
21. 15. 2677	10000mm	± 300mm
21. 15. 2678	15000mm	± 450mm
21. 15. 2679	20000mm	± 600mm

ITEM NO.	21. 15. 2958	21. 15. 2670	21. 15. 2671	21. 15. 2672	21. 15. 2673
21. 15. 2674	21. 15. 2675	21. 15. 2676	21. 15. 2677	21. 15. 2678	21. 15. 2679
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level1, Orange				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

**SECOMP**