
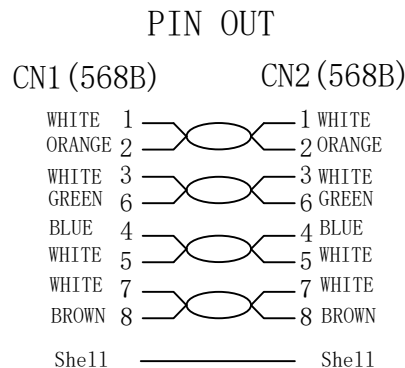


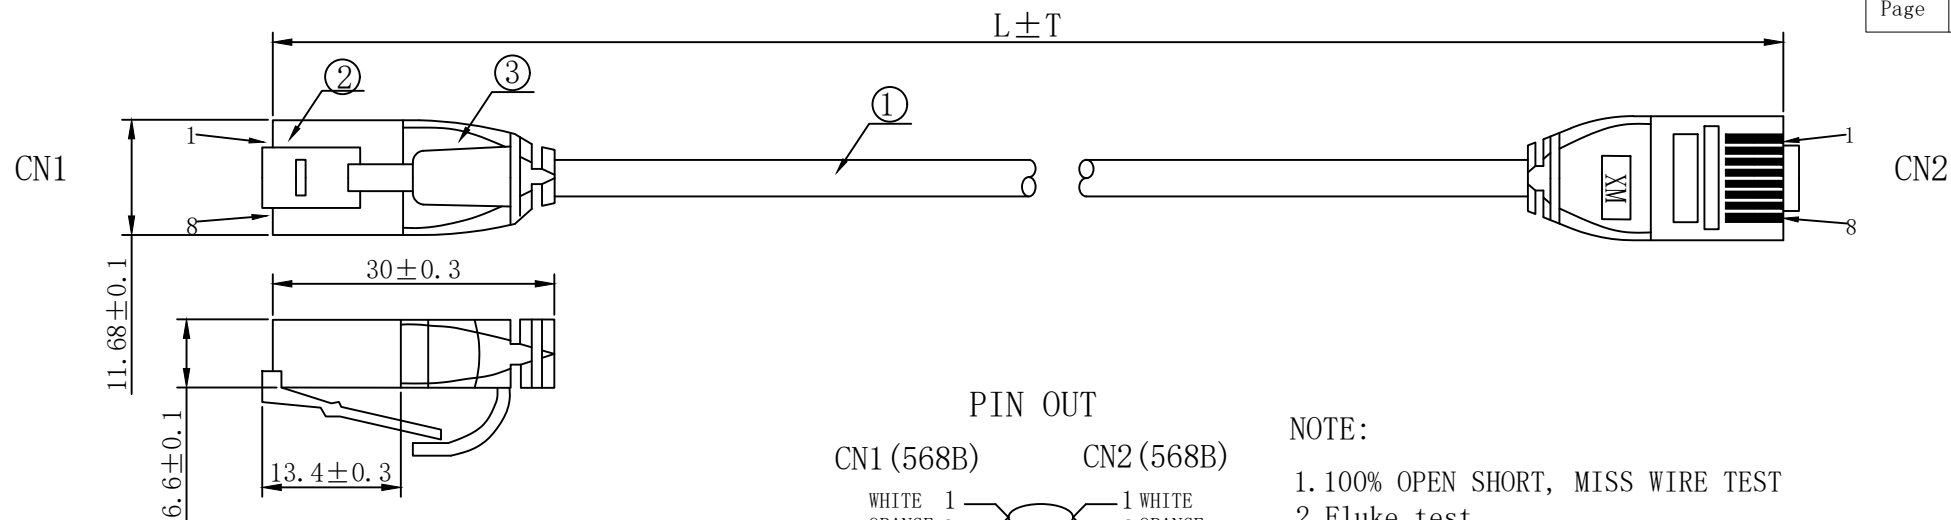

NOTE:

- 100% OPEN SHORT, MISS WIRE TEST
- Fluke test
- TEST LIMIT:ISO11801 Channel Class I(+ALL)
- RoHS and REACH Compliant
- Working temperature:-10°C~+60°C
Storage temperature:-20°C~+75°C
- Print word: Cat 8.1 S/FTP 4x2x28AWG/7 TPE-LSZH
ISO/IEC11801 & EN50173 & ANSI/TIA568.2-D
- Flame retardant (IEC60332-1-2)
Low smoke(IEC 61034)
Halogen free(IEC 60754-2)
- Minimum of the bending radius is $6 \times ODmm$ (Suitable for all meters)
- Support PoE per IEEE802.3af,PoE+ per IEEE802.3at, PoE++ per IEEE802.3bt

MATERIAL LIST

③	OVER MOLD	75A PVC grey(RAL7035)	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug,Pin Gold Plated 3U", The Shell plated nickel,black	2	
①	CABLE	S/FTP CAT.8 (AWG28 BC*1P+AL-FOIL)*4PAIRS+ BRAID+ JACKET:TPE-LSZH grey(RAL7035) OD:4.5±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

21.15.3405	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, grey	5000±100mm
21.15.3403	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, grey	3000±50mm
21.15.3402	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, grey	2000±30mm
21.15.3404	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, grey	1500±30mm
21.15.3401	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, grey	1000±25mm
21.15.3400	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, grey	500±25mm
21.15.3406	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, grey	300±25mm
ITEM NO.	DESC.	LENGTH

SECOMP