
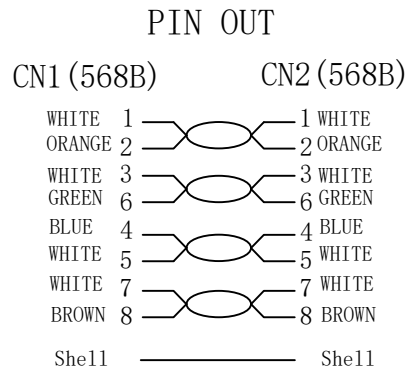


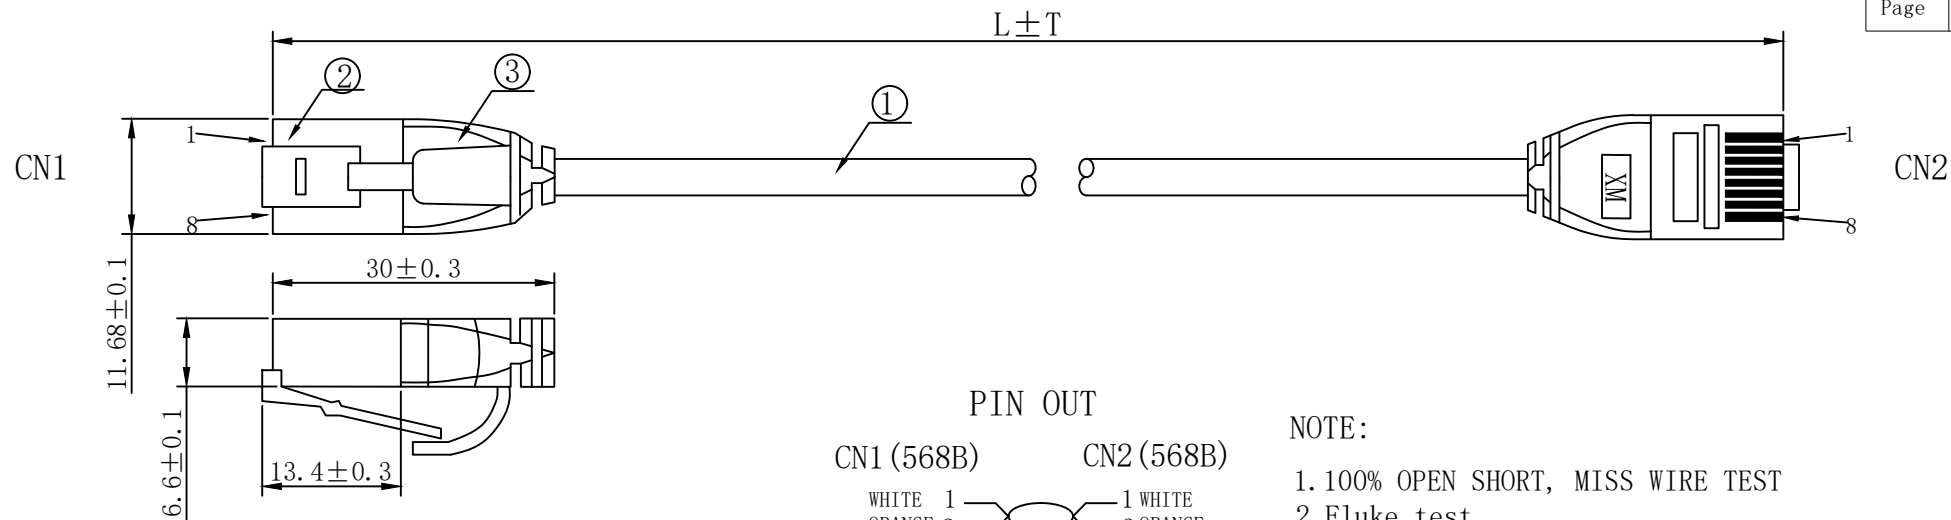

- NOTE:
- 1. 100% OPEN SHORT, MISS WIRE TEST
 - 2. Fluke test
 - TEST LIMIT: ISO11801 Channel Class I(+ALL)
 - 3. RoHS and REACH Compliant
 - 5. Working temperature: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Storage temperature: $-20^{\circ}\text{C} \sim +75^{\circ}\text{C}$
 - 6. Print word: Cat 8.1 S/FTP 4x2x28AWG/7 TPE-LSZH
ISO/IEC11801 & EN50173 & ANSI/TIA568.2-D
 - 7. Flame retardant (IEC60332-1-2)
Low smoke (IEC 61034)
Halogen free (IEC 60754-2)
 - 8. Minimum of the bending radius is $6 \times \text{ODmm}$ (Suitable for all meters)
 - 9. Support PoE per IEEE802.3af, PoE+ per IEEE802.3at, PoE++ per IEEE802.3bt

MATERIAL LIST

③	OVER MOLD	75A PVC yellow(Pantone 135C)	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 3U", The Shell plated nickel, black	2	
①	CABLE	S/FTP CAT.8 (AWG28 BC*1P+AL-FOIL)*4PAIRS+ Braid+ JACKET:TPE-LSZH yellow(Pantone 135C) OD: $4.5 \pm 0.2\text{mm}$	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2025-03-31	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

21.15.3425	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, yellow	5000±100mm
21.15.3423	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, yellow	3000±50mm
21.15.3422	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, yellow	2000±30mm
21.15.3424	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, yellow	1500±30mm
21.15.3421	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, yellow	1000±25mm
21.15.3420	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, yellow	500±25mm
21.15.3426	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, yellow	300±25mm
ITEM NO.	DESC.	LENGTH

SECOMP