


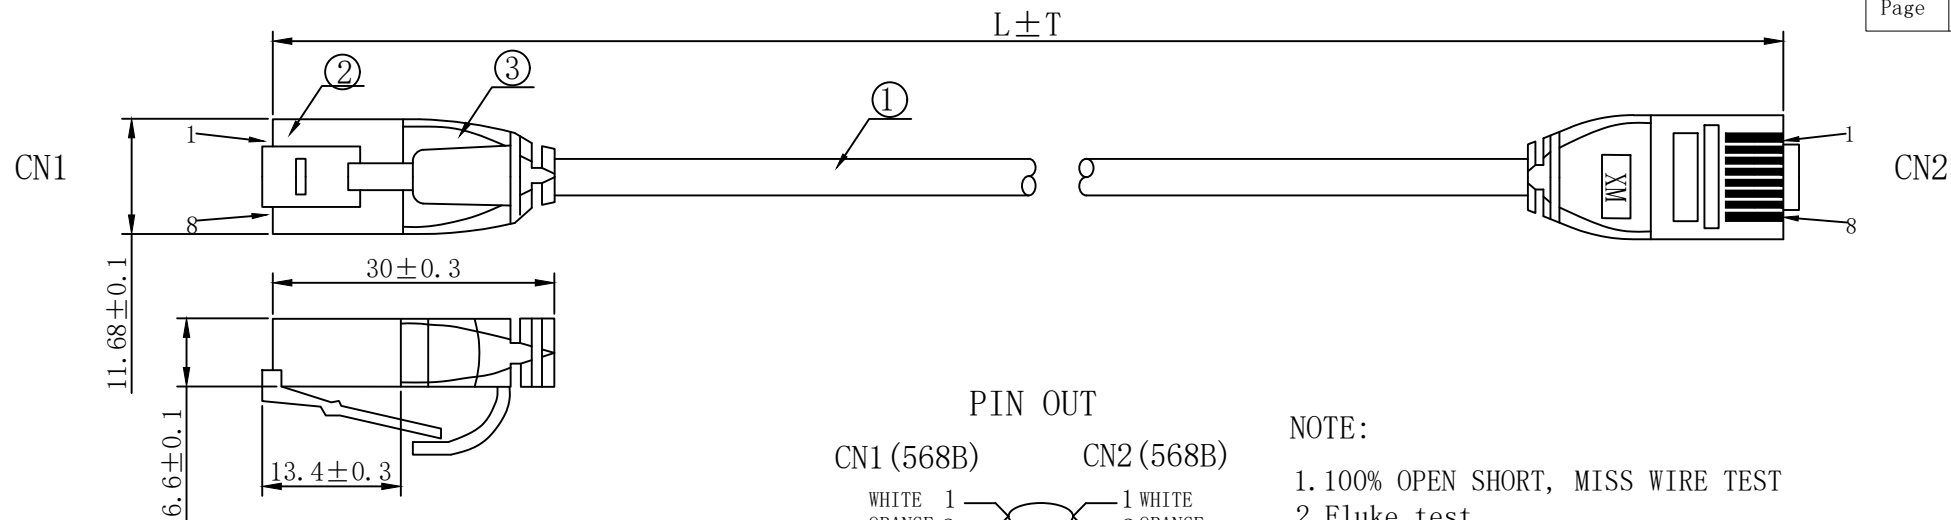

PIN OUT	
CN1 (568B)	CN2 (568B)
WHITE 1	1 WHITE
ORANGE 2	2 ORANGE
WHITE 3	3 WHITE
GREEN 6	6 GREEN
BLUE 4	4 BLUE
WHITE 5	5 WHITE
WHITE 7	7 WHITE
BROWN 8	8 BROWN
Shell	Shell

- NOTE:
- 100% OPEN SHORT, MISS WIRE TEST
 - Fluke test
 - TEST LIMIT:ISO11801 Channel Class I(+ALL)
 - RoHS and REACH Compliant
 - Working temperature:-10℃~+60℃
Storage temperature:-20℃~+75℃
 - Print word: Cat 8.1 S/FTP 4x2x28AWG/7 TPE-LSZH
ISO/IEC11801 & EN50173 & ANSI/TIA568.2-D
 - Flame retardant (IEC60332-1-2)
Low smoke(IEC 61034)
Halogen free(IEC 60754-2)
 - Minimum of the bending radius is 6*ODmm(Suitable for all meters)
 - Support PoE per IEEE802.3af,PoE+ per IEEE802.3at, PoE++ per IEEE802.3bt

MATERIAL LIST

③	OVER MOLD	75A PVC blue(Pantone 647C)	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug,Pin Gold Plated 3U", The Shell plated nickel,black	2	
①	CABLE	S/FTP CAT.8 (AWG28 BC*1P+AL-FOIL)*4PAIRS+ BRAID+ JACKET:TPE-LSZH blue(Pantone 647C) OD:4.5±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2025-03-31	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

21.15.3445	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, blue	5000±100mm
21.15.3443	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, blue	3000±50mm
21.15.3442	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, blue	2000±30mm
21.15.3444	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, blue	1500±30mm
21.15.3441	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, blue	1000±25mm
21.15.3440	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, blue	500±25mm
21.15.3446	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, blue	300±25mm
ITEM NO.	DESC.	LENGTH

SECOMP