

# WV-S85403A-V2G

3 x 4MP AI Outdoor Multi-directional Camera (2.5x zoom)

## 3 x 4MP AI Outdoor Multi-directional Camera (2.5x zoom)

---



- 3 x 4MP(12MP) 2688x1520 up to 30fps
  - Up to 4 Edge AI analytic apps
  - 270° coverage with one IP address
  - Wide range tilt angle adjustment mechanism
  - IP66, IP67, IK10 Compliant
  - Built-in FIPS 140-3 Level 3, CC EAL6+ Compliant Secure Element (NXP® EdgeLock® SE052F)
  - NDAA Compliant
-

# SPECIFICATIONS

| Camera                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                                    | 3x 1/2.7 type CMOS image sensor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Scanning Area                                   | 5.38 mm(H) x 3.02 mm(V)<br>{7/32 inches(H) x 1/8 inches(V)}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Minimum Illumination                            | Color :<br>0.59 lx (30IRE, F2.0, 1/30s, AGC:11)*<br>0.85 lx (50IRE, F2.0, 1/30s, AGC:11)<br>0.053 lx (50IRE, F2.0, 16/30s, AGC:11)*<br><br>BW :<br>0.34 lx (50IRE, F2.0, 1/30s, AGC:11)<br>0.021 lx (50IRE, F2.0, 16/30s, AGC:11)*<br>*Converted value                                                                                                                                                                                                                                                                                                                                                                                                                            |
| White Balance                                   | ATW1/ ATW2/ AWC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Maximum shutter                                 | 30 fps mode: Max.1/10000s to Max.16/30s ,<br>25 fps mode: Max.1/10000s to Max.16/25s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Intelligent Auto                                | On / Off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Super Dynamic                                   | On / Off,<br>The level can be set in the range of 0 to 31.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Dynamic Range                                   | Max. 108 dB<br>(Super Dynamic: On, Level: 31)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Adaptive Black Stretch                          | The level can be set in the range of 0 to 255.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Back Light Compensation/High Light Compensation | BLC (Back light compensation) / HLC (High light compensation) /<br>Off (only when Super dynamic / Intelligent Auto : Off)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Fog Compensation                                | On / Off (only when Intelligent auto / auto contrast adjust : Off)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Maximum Gain (AGC)                              | The level can be set in the range of 0 to 11.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Color/BW (ICR)                                  | Auto1(IR Light Off) / Auto2(IR Light On) / Auto3(SCC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| IR LED Light                                    | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Digital Noise Reduction                         | The level can be set in the range of 0 to 255.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Panorama                                        | Panorama mode (H: 170 deg.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Video Motion Detection (VMD)                    | On / Off,<br>4 areas available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Scene Change Detection (SCD)                    | On / Off,<br>1 areas available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Audio Detection                                 | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| AI Sound Classification                         | Selectable from Gunshot, Yell, Vehicle horn, Glass break                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| AI Analytics                                    | AI Video Motion Detection, AI Face Detection,<br>AI People Detection, AI Vehicle Detection, AI Non mask Detection (prior to V2.70), AI Occupancy<br>Detection, AI Scene Change Detection<br><br>For details :<br><a href="https://i-pro.com/products_and_solutions/en/surveillance/products/analytics-software">https://i-pro.com/products_and_solutions/en/surveillance/products/analytics-software</a><br>3rd party applications are also available.<br><a href="https://i-pro.com/products_and_solutions/en/surveillance/solutions/edge-ai-platform/application-list">https://i-pro.com/products_and_solutions/en/surveillance/solutions/edge-ai-platform/application-list</a> |
| Max. Number of Applications                     | 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Privacy Zone       | On / Off,<br>Up to 8 zones available                                          |
| VIQS               | On / Off,<br>Up to 8 zones available                                          |
| Image Rotation     | 0° (Off)/ 90°/ 180° (Upside-down)/ 270°                                       |
| Camera Title (OSD) | On / Off, Up to 40 characters, Up to 2 Lines (alphanumeric characters, marks) |
| Focus Adjustment   | Auto focus                                                                    |

| Lens                      |                                                                       |
|---------------------------|-----------------------------------------------------------------------|
| Optical zoom              | 2.5x (Motorized zoom / Motorized focus)                               |
| Digital (electronic) zoom | max 10.5x                                                             |
| Focal length              | 2.9 mm {1/8 inches} – 7.3 mm {1/4 inches}                             |
| Angular Field of View     | Horizontal: 43°(TELE) - 100°(WIDE)<br>Vertical: 24°(TELE) - 56°(WIDE) |
| Maximum Aperture Ratio    | 1 : 2.0(WIDE) – 1 : 3.0(TELE)                                         |
| Focus range               | 1 m {3.28 ft} – ∞                                                     |

| DORI                       |                                                     |
|----------------------------|-----------------------------------------------------|
| Detect (25ppm / 8ppf)      | Wide : 45.1 m / 148.0 ft, Tele : 136.5 m / 447.8 ft |
| Observe (62.5ppm / 19ppf)  | Wide : 18.0 m / 59.2 ft, Tele : 54.6 m / 179.1 ft   |
| Recognize (125ppm / 38ppf) | Wide : 9.0 m / 29.6 ft, Tele : 27.3 m / 89.6 ft     |
| Identify (250ppm / 76ppf)  | Wide : 4.5 m / 14.8 ft, Tele : 13.6 m / 44.8 ft     |

| System on Chip (SoC) |               |
|----------------------|---------------|
| System on Chip (SoC) | Ambarella CV2 |

| Adjusting Angle |                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Adjusting Angle | Camera 1, 2, 3 :<br>Horizontal : ±125° (Adjust by horizontal (PAN) angle)<br>Vertical : +10° to +105° (Adjust by vertical (TILT) angle)<br>Yaw : ±90° (Adjust by azimuth (YAW) angle)<br>Twist : ±30°<br>*The above is the adjustable range of a single camera.<br>The adjustable range of each camera varies according to the positional relationship with other cameras. |

| Browser GUI               |                                                                                                                                        |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Camera Control            | Brightness, AUX On / Off                                                                                                               |
| Audio                     | Mic (Line) Input : On / Off Volume adjustment : Low / Middle / High<br>Audio Output : On / Off Volume adjustment : Low / Middle / High |
| GUI / Setup Menu Language | English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese                                                      |
| Browser                   | Microsoft Edge, Firefox, Google Chrome                                                                                                 |

| Network                               |                                                                                                                                                             |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network IF                            | 10Base-T / 100Base-TX / 1000Base-T, RJ45 connector                                                                                                          |
| Resolution H.265/ H.264/ JPEG (MJPEG) | [16 : 9 mode]<br>2688 x 1520 / 2560 x 1440 / 1920×1080 / 1280 x 720 / 640×360 / 320×180                                                                     |
| H.265/H.264                           | [Transmission Mode]<br>Constant bit rate / VBR / Frame rate / Best effort<br>[Transmission Type]<br>Unicast port (AUTO) / Unicast port (MANUAL) / Multicast |

|                               |                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| JPEG                          | [Image Quality]<br>10 steps                                                                                                                                                                                                                                                                                                                                                         |
| Smart Coding                  | GOP (Group of pictures) control : On (Frame rate control)* / On (Advanced)* / On (Mid) / On (Low) / Off<br>*On (Frame rate control) and On (Advanced) are only available with H.265.<br>Smart VIQS: On(High)/On(Low)/Off, Smart P-picture control: On/Off                                                                                                                           |
| Audio Compression             | G.726 (ADPCM) : 16 kbps / 32 kbps , G.711 : 64 kbps , AAC-LC : 64 kbps / 96 kbps / 128 kbps                                                                                                                                                                                                                                                                                         |
| Audio Transmission Mode       | Off / Mic (Line) input / Audio output / Interactive (Half duplex) / Interactive (Full duplex)                                                                                                                                                                                                                                                                                       |
| Supported Protocol            | IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, SMTP, DNS, NTP, SNMPv1/v2/v3, DHCPv6, RTP, MLD, ICMP, ARP, IEEE 802.1X, DiffServ, LLDP, MQTT<br>IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, RTSP, RTP, RTP/RTCP, SMTP, DHCP, DNS, DDNS, NTP, SNMPv1/v2/v3, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ, SRTT, LLDP, MQTT                                                             |
| No. of Simultaneous Users     | Up to 24 users (Depends on network conditions)                                                                                                                                                                                                                                                                                                                                      |
| Secure                        | FIPS 140-3 level 3, CC EAL6+ (NXP® EdgeLock® SE052F),<br>Device Certificate GlobalSign® pre-installed, HTTPS,<br>User authentication, digest authentication, Host authentication,<br>IEEE802.1X, System log, Image transmission log, brute-force protection,<br>Alteration Detection, Secure boot, Signed firmware                                                                  |
| SDXC/SDHC/SD Memory Card      | H.265 / H.264 recording :<br>Manual REC / Alarm REC (Pre/Post) / Schedule REC / Backup upon network failure<br>JPEG recording : Manual REC / Alarm REC (Pre/Post) / Backup upon network failure<br>Compatible SDXC/SDHC/SD Memory Card :<br>microSDXC memory card : 64 GB, 128 GB, 256 GB, 512 GB<br>microSDHC memory card : 4 GB, 8 GB, 16 GB, 32 GB<br>microSD memory card : 2 GB |
| Mobile Terminal Compatibility | iPad, iPhone,<br>Android™ terminals                                                                                                                                                                                                                                                                                                                                                 |
| ONVIF® Profile                | G / M / S / T                                                                                                                                                                                                                                                                                                                                                                       |

## Alarm

|               |                                                                                                                                     |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Alarm Source  | 3 terminals input, VMD alarm, SCD alarm,<br>Command alarm, Audio detection alarm                                                    |
| Alarm Actions | SDXC/SDHC/SD memory recording, E-mail notification,<br>HTTP alarm notification Indication on browser, TCP alarm notification output |

## Input/Output

|                        |                                                                                                                                                                                                                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio input            | ø3.5 mm stereo mini jack<br>For microphone input : Recommended applicable microphone : Plug-in power type<br>(Sensitivity of microphone : -51 dB to -38 dB (0 dB=1 V/Pa, 1 kHz))<br>Input impedance : Approx. 2 kΩ (unbalanced), Supply voltage : 2.5 V ±0.5 V<br>For line input : Input level: Approx. -10 dBV |
| Audio Output           | ø3.5 mm stereo mini jack (Audio output is monaural.)<br>Output impedance: Approx. 600 Ω (unbalanced)<br>Output level: -20 dBV                                                                                                                                                                                   |
| External I/O Terminals | ALARM IN 1 (Alarm input 1/ Black & white input/ Auto time adjustment input) (x1)<br>ALARM IN 2 (Alarm input 2/ ALARM OUT) (x1), ALARM IN 3 (Alarm input 3/ ALARM OUT/ AUX OUT) (x1)                                                                                                                             |
| Monitor Output         | -                                                                                                                                                                                                                                                                                                               |
| Wi-Fi USB Adapter      | Yes (for adjustment)                                                                                                                                                                                                                                                                                            |

## General

|                                    |                                                                                                                                           |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Safety                             | UL (UL62368-1), c-UL (CSA C22.2 No.62368-1),<br>CE, IEC62368-1                                                                            |
| EMC                                | FCC (Part15 ClassA), ICES-003 ClassA,<br>EN55032 ClassA, EN55035                                                                          |
| Power Source and Power Consumption | PoE DC 48 V : 270 mA / Approx. 12.95 W (Class 0 device)<br>PoE+ (IEEE802.3at compliant): DC 54 V : 320 mA/Approx. 17.3 W (Class 4 device) |

|                                |                                                                                                                                                                  |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ambient Operating Temperature  | –40 °C to +60 °C {–40 °F to 140 °F}<br>(Power On range: –20 °C to +60 °C {–4 °F to 140 °F})<br>Maximum temperature according to NEMA TS 2 (2.2.7): 74 °C(165 °F) |
| Ambient Operating Humidity     | 10 to 100 % (no condensation)                                                                                                                                    |
| Storage Temperature & Humidity | Storage temperature: -30 °C to +60 °C {-22 °F to +140 °F}<br>Storage humidity: 10 % to 95 % (no condensation)                                                    |
| Anti-Condensation System       | Temish element + Heater + moisture absorption gel                                                                                                                |
| Water and Dust Resistance      | IP67/IP66 (IEC 60529), Type 4X (UL50E),<br>NEMA 4X compliant                                                                                                     |
| Shock Resistance               | IK10 (IEC 62262)                                                                                                                                                 |
| Wind Resistance                | Up to 40 m/s {approx. 89 mph}                                                                                                                                    |
| Other standard support         | NEMA TS 2 (2.2.7-2.2.9)                                                                                                                                          |
| Dimensions                     | When using the attachment plate only :<br>ø300 mm × 90 mm (H) {ø11-13/16 inches ×3-17/32 inches (H)}                                                             |
| Mass (approx.)                 | When using the attachment plate only:<br>(3eyes): Approx. 3.1 kg {6.83 lbs}                                                                                      |
| Finish                         | Main body: Aluminum die cast, i-PRO white<br>Outer fixing screws:<br>Stainless steel (Corrosion-resistant treatment)<br>Dome cover:<br>PC resin, Smoke           |

## NOTES

### Important

- Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
  - i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.
  - Masses and dimensions are approximate. Specifications are subject to change without notice.
- Trademarks and registered trademarks
- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. – Android is a trademark of Google LLC.
  - ONVIF is a trademark of ONVIF, Inc.
  - All other trademarks identified herein are the property of their respective owners

## OPTIONAL ACCESSORIES

Select a compatible accessory

[Accessory Selector \(i-pro.com\)](http://i-pro.com)



WV-QWL506-W  
4-screw Wall Mount  
Bracket



WV-QWL506M1-W  
ANSI Male Wall Mount  
Bracket (1.5"NPT)



WV-QWL501-W  
Mount Bracket



WV-QSR503-W  
Mount Bracket



WV-QSR503M-W  
Mount Bracket



WV-QSR503M1-W  
Mount Bracket



WV-QSR503F-W  
Mount Bracket



WV-QSR503F1-W  
Mount Bracket



WV-QPL500-W  
Mount Bracket



WV-QJB503-W  
Base Bracket



WV-QCN500-W  
Mount Bracket



WV-QCL501-W  
Mount Bracket



WV-QCL101-W  
Mount Bracket



WV-QCL100-W  
Mount Bracket



WV-QCA501A  
I/O Cable



WV-Q105A  
Mount Bracket



WV-SDB256G  
i-PRO SD Memory  
Card



WV-SDB128G  
i-PRO SD Memory  
Card



WV-SDB064G  
i-PRO SD Memory  
Card



WV-PM500  
Compact microphone  
unit



WJ-PU201P  
PoE Injector




WJ-PU201F/G  
PoE Injector



WJ-PU201/G  
PoE Injector

APPEARANCE

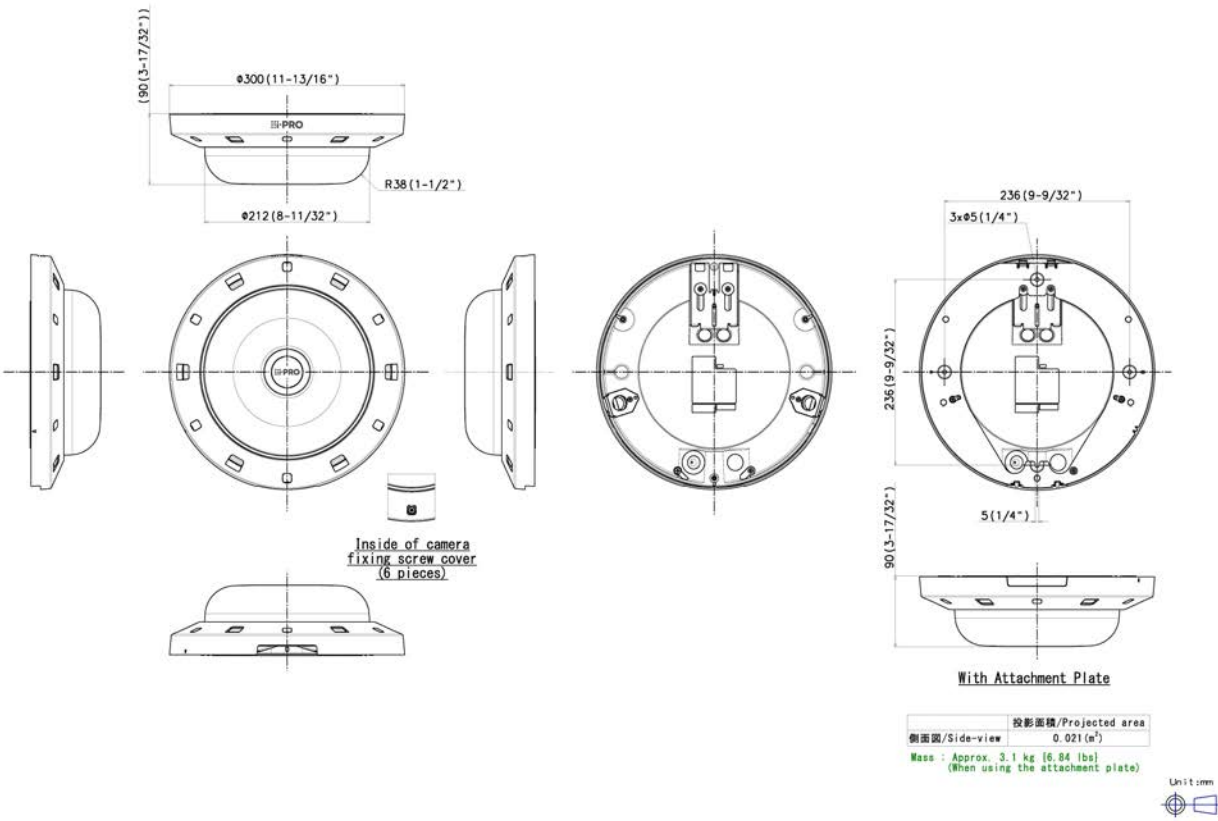

---

### Important

- Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.
- Masses and dimensions are approximate.
- Specifications are subject to change without notice.

### Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. – Android is a trademark of Google LLC.
  - ONVIF is a trademark of ONVIF, Inc.
  - All other trademarks identified herein are the property of their respective owners.
-