



Model: GS1005PTS1

# 5-Port Gigabit PoE+ Switch with 1 SFP

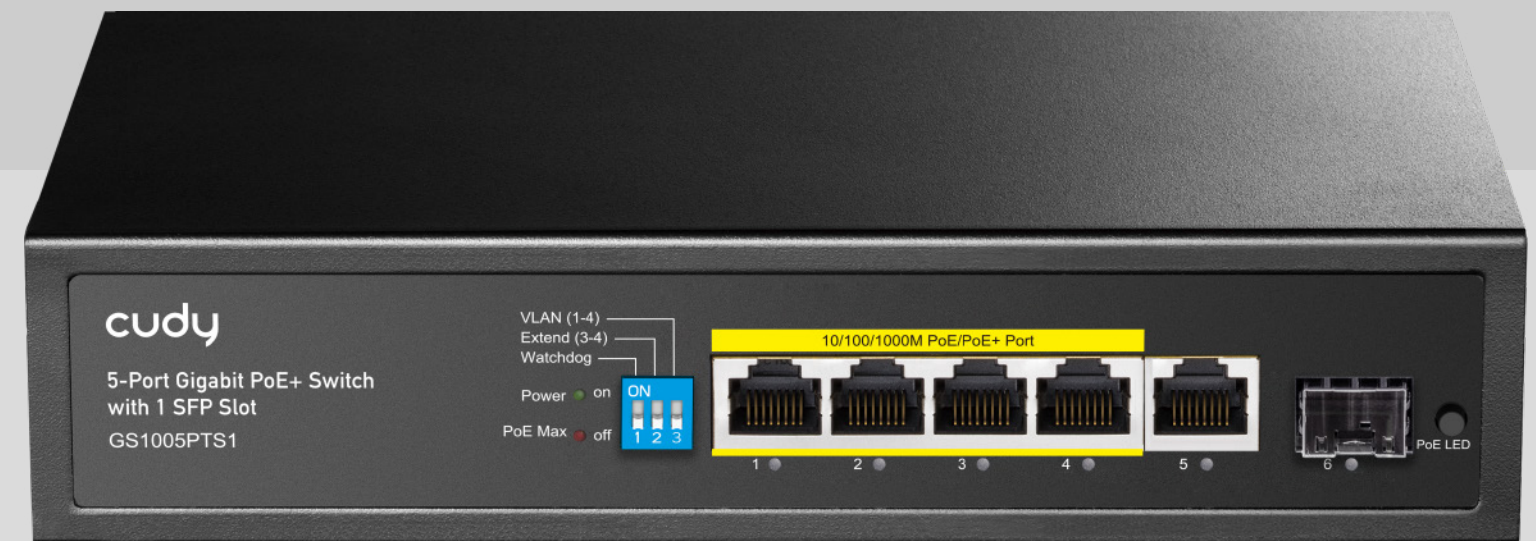

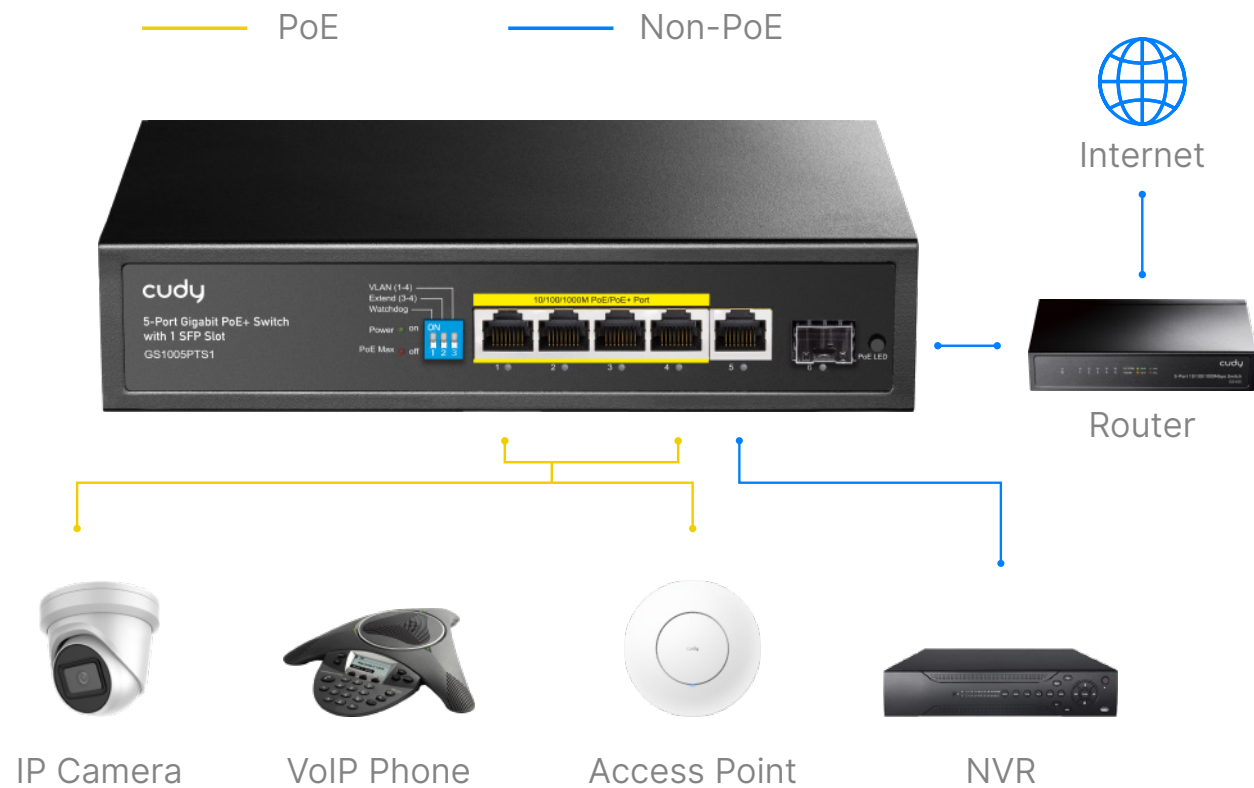


## Watchdog for Improved Reliability

The PoE Watchdog monitors link activity on port 1~4 and attempts to reboot connected clients that have been inactive for 5 minutes, ensuring system stability. Do not turn it on for clients with online auto-upgrade feature.




## Extend for Long-Range Powering

Prolongs the PoE transmission distance of port 3~4 to a maximum of 250 m, enabling long-range surveillance installations.

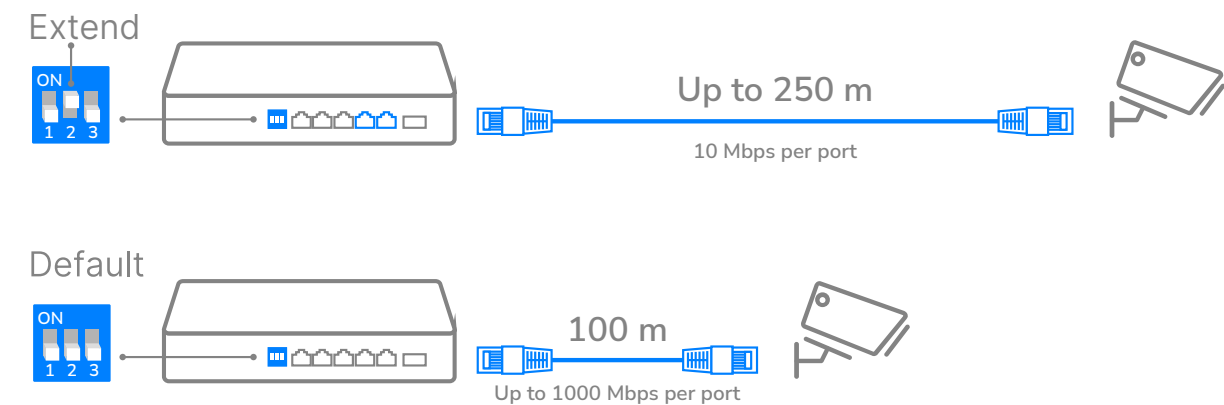

## VLAN Mode for Port Isolation

Separates clients into different subnets for improved security, preventing data leakage in case of client-side hacking.

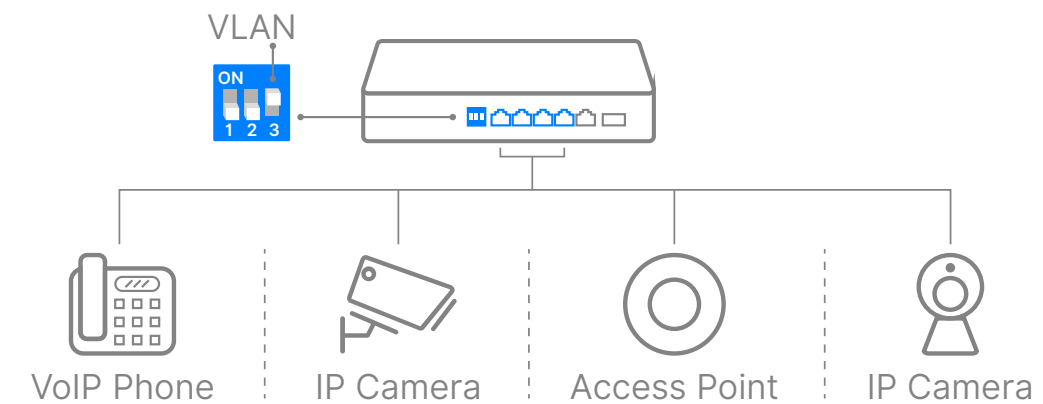



## Highlights

A 5-GbE, 1-SFP PoE switch with a 120W power supply and a silent cooling system, featuring independant control switch for Extend, VLAN, and Watchdog feature.

- 4× GbE with 802.3at/af Mode A PoE
- 1× Uplink GbE + 1× Uplink SFP
- 120W Power Supply
- Extend On/Off, VLAN On/Off
- Watchdog On/Off
- PoE Max Status LED
- 200×118×44 mm (7.87×4.65×1.73")

## Package Content

- GS1005PTS1
- Power Cord
- Installation Guide

## Specifications

Interfaces	Gigabit SFP Slots	1
	Gigabit RJ45 Ports	5
	Gigabit RJ45 PoE Ports	#1~#4
	Max Power on a Single PoE Port	Port 1: 60W Port 2~4: 30W
	PoE Port Notes	PoE port #1 supports 802.3at 60W output, and the rest support 30W 802.3at/af standards.
	Extend Mode Ports	#3~#4
	VLAN Mode Ports	#1~#4
	LED	Power PoE Status of Each PoE Port Link/ACT of Each Ethernet Port PoE Max Status
	Power Input	AC Inlet
	Physical Buttons	Extend On/Off VLAN On/Off PoE Watchdog On/Off PoE LED Toggle
	Physical Buttons Note	The PoE Watchdog will attempt to reboot the plugged-in clients that have been inactive for 5 minutes. Do not turn it on for clients with online auto-upgrade feature.



# Specifications

Performance	Copper Speed and Distance	Cat. 3 or higher cable:
		100 meters at 10 Mbps
		Cat. 5 or higher cable:
		100 meters at 100 Mbps
		Cat. 5e or higher cable:
		100 meters at Gigabit
	Copper Speed and Distance Note	Cat. 5e or higher cable:
		250 meters at 10 Mbps
		250-meter transmission is only available on the Extend Mode ports when the Extend Mode is activated.
Power	Optical Spec and Distance	Depends on the Installed Optical Module
	MAC Address Table	2048
	Max Switching Capacity	12 Gbps
	Max Forwarding Rate	8.928 Mpps
	Jumbo Frame	16 KB
	Packet Buffer	2 Mbit
	Power Methods	AC
	AC	100-240V 50/60Hz
	Power Supply	120W
	Max Power Excluding PoE	5W

# Specifications

Switching	802.3 Protocols	802.3i 10BASE-T
		802.3u 100BASE-TX
		802.3ab 1000BASE-T
		802.3z 1000BASE-X
		802.3x Flow Control
		802.3af PoE
Reliability		802.3at PoE
	Grounding Methods	Three-Prong Plug
		IEC/EN 61000-4-2, Level 3 ESD:
		Contact: 6kV; Air: 8kV
	Environment	IEC/EN 61000-4-5, Level 4 Surge:
		Power: DM 2kV, CM 4kV; RJ45: CM 4kV
		Operating Temperature:
		0~40 °C (32~104 °F)
		Storage Temperature:
		-40~70°C (-40~158 °F)
		Operating Humidity:
		10~90% non-condensing
		Storage Humidity:
		10~95% non-condensing



# Specifications

Mechanical	Dimension	200×118×44 mm
		7.87×4.65×1.73 inches
	Casing Material	Metal
	Installation	Desktop
		Rackmount via Brackets (Brackets not included in the box)
Ordering Information	Retail Package Dimension	249×207×60 mm
		9.8×8.15×2.36 inches
	Units per Carton	16
	Carton Dimension	51.4×42.9×27.2 cm
		20.24×16.89×10.71 inches