



Datenblatt - Fiche technique - Data sheet


21.99.1486



VALUE UTP-Patchkabel Kat.6A, weiss, 1,5 m

Cordon VALUE Cat.6A / 10 Gigabit UTP, blanc, 1,5 m

VALUE UTP Patch Cord Cat.6A, white, 1.5 m

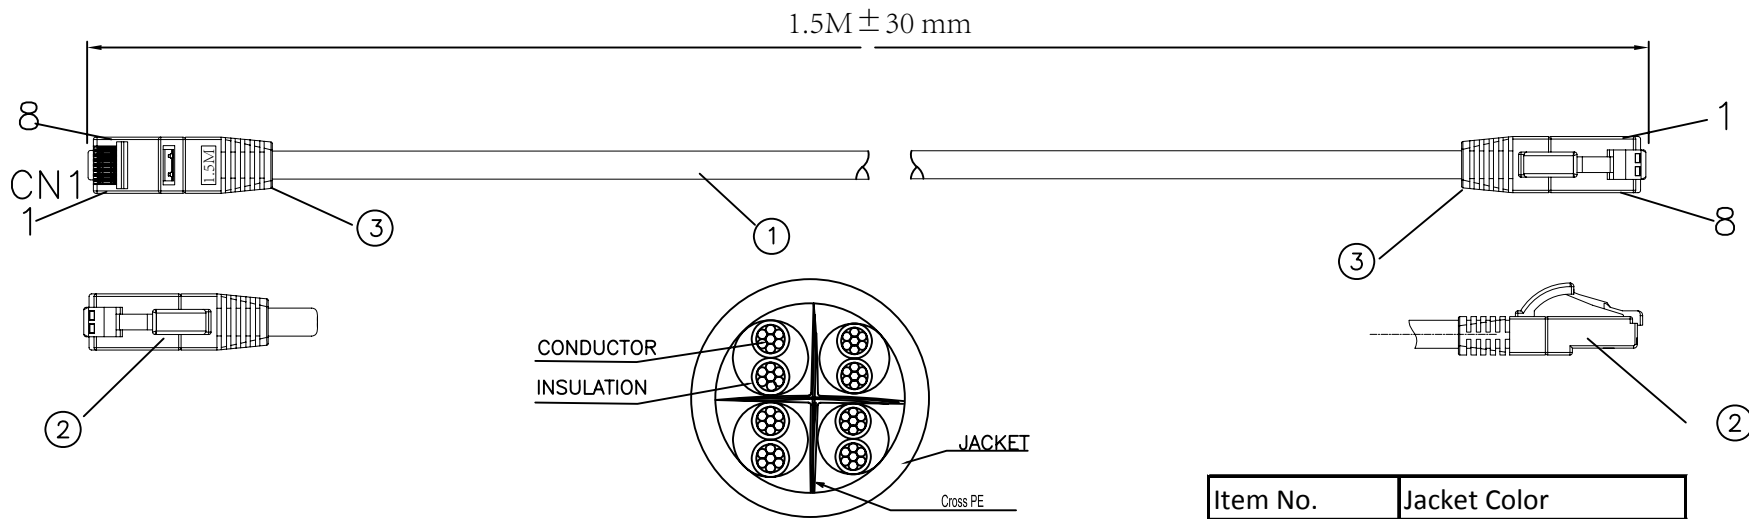

MATERIAL LIST:

| NO. | PARTS NAME | SPECIFICATION DESCRIPTION |
|-----|----------------|---|
| ① | CABLE | UTP [24AWG 7*0.19±0.015mm((Bare Copper)*1PR)]*4+PVC OD:5.8±0.3mm |
| ② | RJ45 CONNECTOR | RJ45,8P8C,TWO FORK GOLD PLATED CONTACTS |
| ③ | MOLDING | MOLDING PVC |

(1) wiring: T568B

| Item No. | Jacket Color |
|------------|------------------|
| 21.99.1480 | Grey(RAL 7044) |
| 21.99.1481 | Red(RAL 3000) |
| 21.99.1482 | Yellow(RAL 1004) |
| 21.99.1483 | Green(RAL 6016) |
| 21.99.1484 | Blue(RAL 5019) |
| 21.99.1485 | Black(RAL 9011) |
| 21.99.1486 | White(RAL 9003) |

Marking: E213738 CM (UL) C(UL) UTP PATCH CORD 24AWG 4P ISO/IEC 11801 AND TIA/EIA 568 CAT6A

ELECTRONIC TEST:

- A. OPEN/SHORT : 100%
- B. WORKING TEMPERATURES:-20~60°C
- C. Minimum Banding Radius: 46MM

| | | | | | |
|-------------|------------|------------|------------------------------------|------------|------------|
| Item No. | 21.99.1480 | 21.99.1481 | 21.99.1482 | 21.99.1483 | 21.99.1484 |
| | 21.99.1485 | 21.99.1486 | | | |
| REMARK: NO | CHA NO | DESC | VALUE UTP Cat. 6a Patch Cord, 1.5m | | |
| DRAWN BY | WEIHAIYAN | | SECOMP | | |
| APPROVED BY | MORGAN | | | | |
| DATE | 2016.07.18 | | | | |