


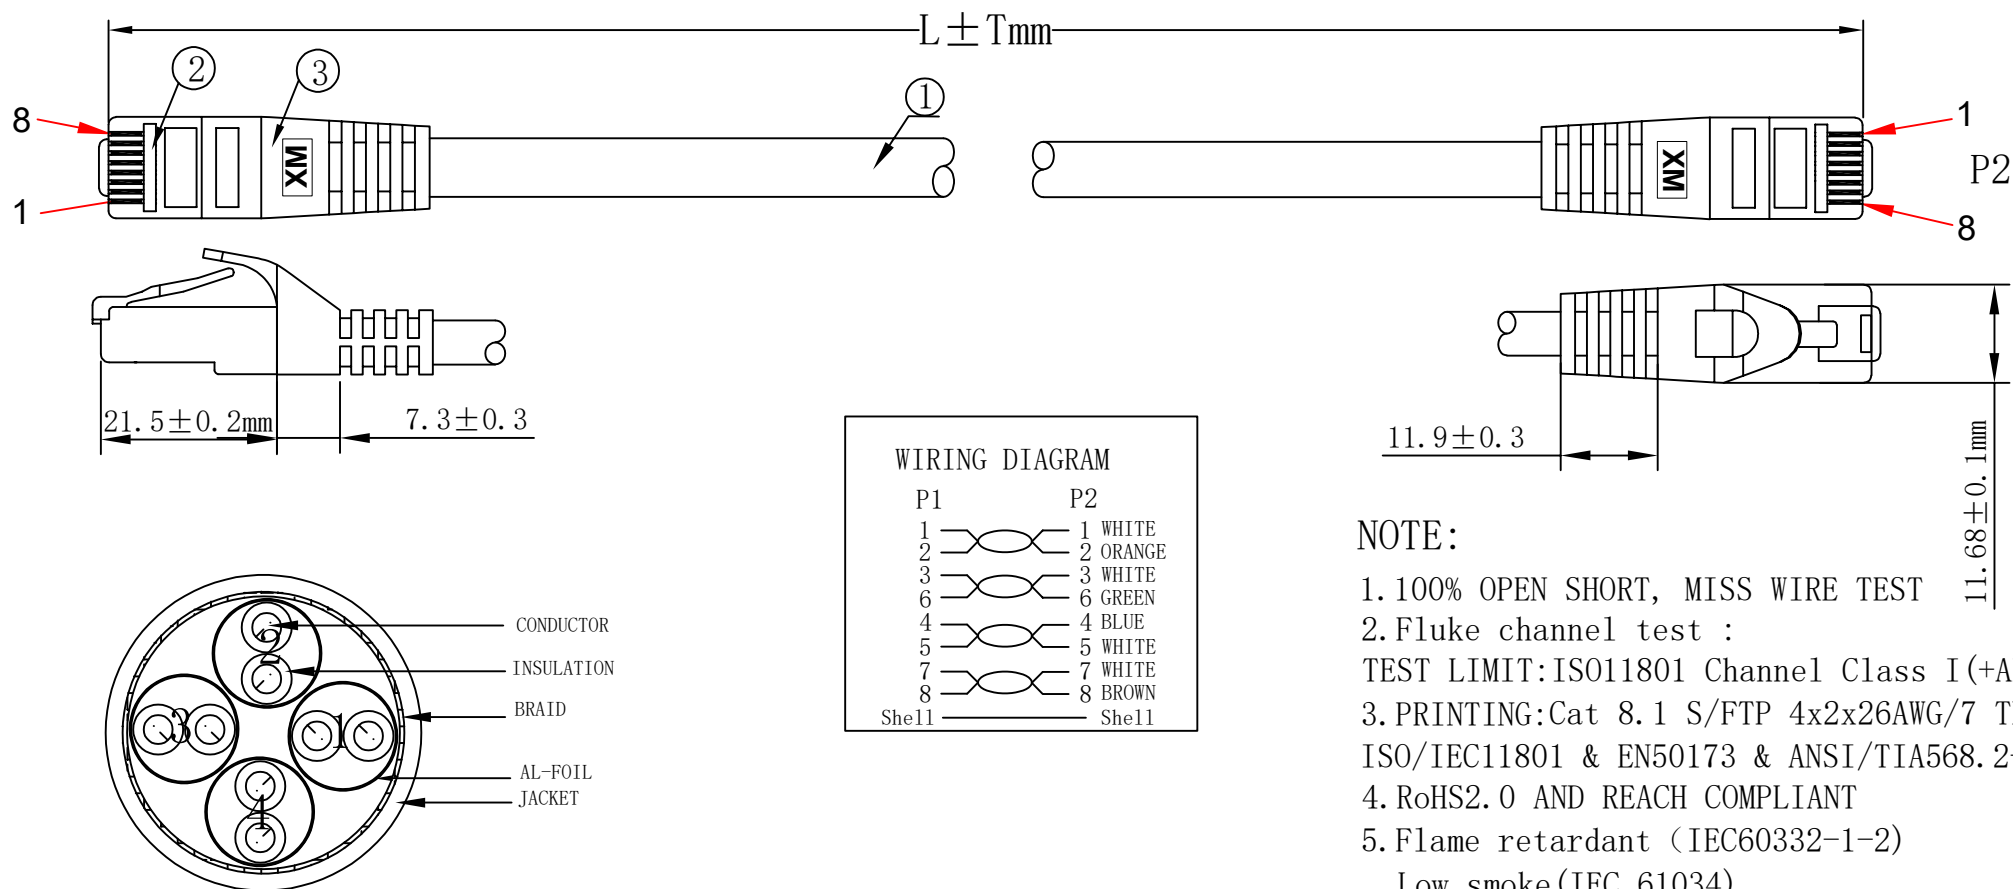

NOTE:

- 100% OPEN SHORT, MISS WIRE TEST
- Fluke channel test :
TEST LIMIT:ISO11801 Channel Class I(+ALL)
- PRINTING:Cat 8.1 S/FTP 4x2x26AWG/7 TPE-LSZH
ISO/IEC11801 & EN50173 & ANSI/TIA568.2-D
- RoHS2.0 AND REACH COMPLIANT
- Flame retardant (IEC60332-1-2)
Low smoke(IEC 61034)
Halogen free(IEC 60754-2)
- GHMT Certified
- Operating Temperature:-20 ~+75° C
- Minimum of the bending radius is 4*OD
(Suitable for all meters)

MATERIAL LIST

③	OVER MOLD	75A PVC	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 50U", The Shell plated nickel black	2	
①	CABLE	S/FTP CAT. 8 (AWG26 BC*1P+AL-FOIL)*4PAIRS+ BRAID+ JACKET:TPE-LSZH blue(Pantone 647C) OD:6.2±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		ADD THE ITEM	2025-5-29	A1
		NEW	2023-02-01	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

21.99.1851	VALUE S/FTP PatchCord Cat.8.1 stranded,LSOH,blue	1000±20mm
21.99.1852	VALUE S/FTP PatchCord Cat.8.1 stranded,LSOH,blue	2000±30mm
21.99.1853	VALUE S/FTP PatchCord Cat.8.1 stranded,LSOH,blue	3000±50mm
DESC.	DESC.	LENGTH

SECOMP