
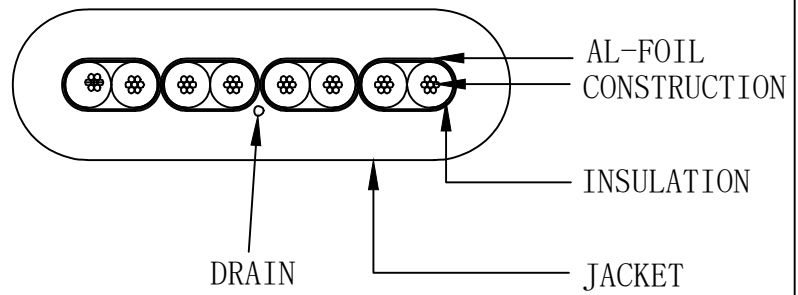


WIRING DIAGRAM

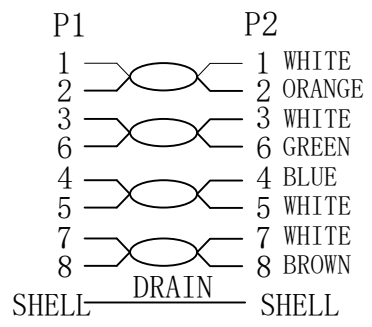

NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test  
Test limit: ISO 11801 CHANNEL CLASS EA
3. PRINT WORD: CAT6A U/FTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568C. 2
4. ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

③	OVER MOLD	PVC Colour Yellow(Pantone 135C)	2	
②	CONNECTOR	RJ45 8P8C shielded Plug, Pin Gold Plated, Transparent Blue	2	
①	CABLE	(32AWG BC*1P+AL-FOIL)*4+E JACKET:PVC OD:2.0±0.2*6.5±0.2mm Yellow(Pantone 135C)	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

ITEM	LENGTH
21.99.2130	500±30mm
21.99.2131	1000±30mm
21.99.2134	1500±50mm
21.99.2132	2000±50mm
21.99.2133	3000±70mm
21.99.2135	5000±70mm

DESC. VALUE Cat.6A FTP PatchCord yellow



NEW

2019-07-03

A