

Note:

ROHS 2.0 & REACH Compliant



2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2

3. Min. Bending Radius: Static: 30mm, Dynamic: 60mm

Test:

Grade Designation: Each to Reference

| TYPE | MULTI-MODE |
|-----------------|------------|
| Insertion LOSS | ≤0.3dB |
| Return LOSS | ≥30dB |
| Test Wavelength | 850nm |

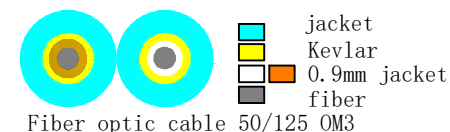

| ⑧ | Ring 1 2 Yellow | 4pcs | |
|-----|--|--------|--------|
| ⑦ | Black Heat Shrink Tube | 2pcs | |
| ⑥ | LC MM Aqua Clip | 2pcs | |
| ⑤ | LC Dust Cap White | 4pcs | |
| ④ | LC Aqua Duplex Connector | 4pcs | |
| ③ | LC White Boot | 4pcs | |
| ② | LC Ferrule 126-128um | 4pcs | |
| ① | Fiber Optical Cable Duplex ϕ 3.0mm OM3 50/125um Aqua LSZH | L+0.1m | |
| NO. | SPECIFICATION STANDARD | QT' Y | REMARK |

| | |
|------------|--|
| 21.99.8707 | VALUE Fibre Optic Jumper Cable, 50/125 μ m, LC-LC, OM3, Aqua, 20m |
| 21.99.8706 | VALUE Fibre Optic Jumper Cable, 50/125 μ m, LC-LC, OM3, Aqua, 15m |
| 21.99.8708 | VALUE Fibre Optic Jumper Cable, 50/125 μ m, LC-LC, OM3, Aqua, 10m |
| 21.99.8705 | VALUE Fibre Optic Jumper Cable, 50/125 μ m, LC-LC, OM3, Aqua, 5m |
| 21.99.8703 | VALUE Fibre Optic Jumper Cable, 50/125 μ m, LC-LC, OM3, Aqua, 3m |
| 21.99.8702 | VALUE Fibre Optic Jumper Cable, 50/125 μ m, LC-LC, OM3, Aqua, 2m |
| 21.99.8701 | VALUE Fibre Optic Jumper Cable, 50/125 μ m, LC-LC, OM3, Aqua, 1m |
| 21.99.8700 | VALUE Fibre Optic Jumper Cable, 50/125 μ m, LC-LC, OM3, Aqua, 0.5m |

ITEM NO. Product description

| | | | | |
|----|-----|-------------------------------|------------|------|
| | | Add Min. Bending Radius | 2022-1-24 | A1 |
| | | NEW | 2016-05-13 | A |
| BY | CHK | REVISION RECORD MODIFICATIONS | DATE | REV. |

SECOMP