


24560-380 GUIDE RAIL STANDARD TYPE, GROOVE WIDTH 2 MM, 340 MM, RED/SILVER, 10 PIECES

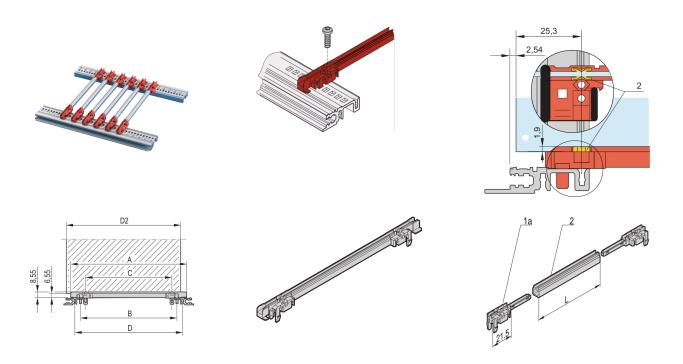

KEY FEATURES

Plastic guide rail, standard type

Guide rails can be clipped into horizontal rails (Al extrusion) or into 1.5-mm-thick plates

Storage temperature: from -40-°C-...-130-°C

The optional ESD clip for can be fitted into guide rails and ensures conductive contact between PCB and horizontal rail both on the solder side and on the component side.

PRODUCT ATTRIBUTES

Product Type: Guide Rail

Type: Standard

Works With: Subracks; Cases; Chassis

Board Depth: 340 mm

Length: 340 mm

Groove Width: 2

ADDITIONAL PRODUCT DETAILS

The plastic guide rail for PCBs or plug-in units of the type Standard, forms a reliable interface between the subrack mechanics and the sub-assemblies. The guide rails can additionally be bolted to the horizontal rail or 1.5 mm thick plates for higher shock and vibration requirements. Guide rail can be optional equipped with a ESD clip, which ensures conductive contact between PCB and horizontal rail. Suitable for RatiopacPRO/-AIR, PropacPRO, CompacPRO and EuropacPRO.

Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

CERTIFICATIONS



North America

All locations +1.763.422.2661 Chat with us: schroff.nvent.com

Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

nVent.com

Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

nVent reserves the right to change specifications without notice.