


# 24813-055 FRAME TYPE PLUG-IN UNIT PRO KIT, WITH HOOD, SHIELDED VERSION, 3 U, 5 HP, 227 MM

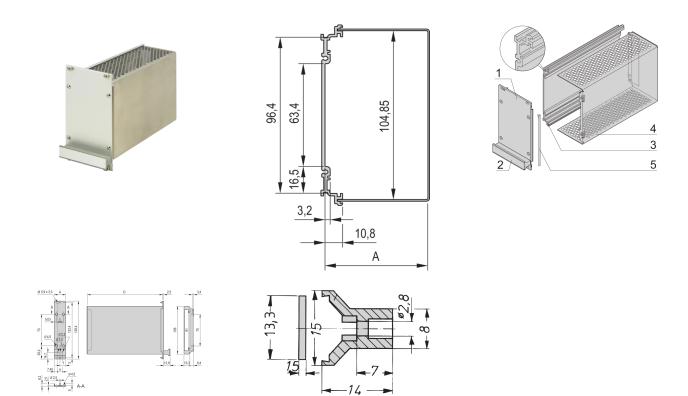

## **KEY FEATURES**

Fits all products conforming to IEC-60297-3-101

Protects a PCB against mechanical damage and discharges electrostatic buildup; for Euroboard formats

Connectors usable under EN 60603-2 (DIN 41612)

## **PRODUCT ATTRIBUTES**

Product Type: Cassette

Type: Frame Type Plug-in Units PRO with Hood

Handle Type: Trapezoid

Rack Height: 3 U

Rack Width: 5 HP

Depth: 227 mm

EMC Gasket Type: TextileRear Panel Type: Single Connector Cut-OutCover Plate Type: HoodMaterial: AluminumFront Finish: AnodizedRear Finish: Conductive	EMC Shielding: Yes
Cover Plate Type: Hood Material: Aluminum Front Finish: Anodized	EMC Gasket Type: Textile
Material: Aluminum Front Finish: Anodized	Rear Panel Type: Single Connector Cut-Out
Front Finish: Anodized	Cover Plate Type: Hood
	Material: Aluminum
Rear Finish: Conductive	Front Finish: Anodized
	Rear Finish: Conductive
Cooling: Perforated	Cooling: Perforated

## ADDITIONAL PRODUCT DETAILS

Protects a PCB against mechanical damage and discharges electrostatic buildup; for Euroboard formats.

## CERTIFICATIONS



#### North America

All locations +1.763.422.2661 Chat with us: schroff.nvent.com

#### Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

nVent.com

#### Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

#### Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

nVent reserves the right to change specifications without notice.