


# 34813-121 FRAME TYPE PLUG-IN UNIT FRONT PANEL, REFROFIT SHIELDING, 3 U, 21 HP, 2.5 MM, AL, FRONT ANODIZED, REAR CONDUCTIVE

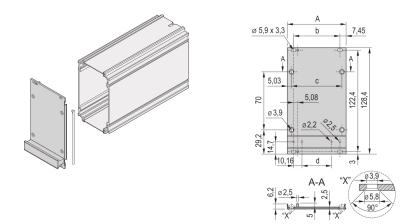

## **KEY FEATURES**

Front Panel for frame type plug-in units PRO, can be modified with Front Panel Configurator

Al extrusion, alignment pin pressed-in, front-anodized, rear conductive

### **PRODUCT ATTRIBUTES**

Accessory Type: Front panel
Material: Aluminum
Front Finish: Anodized
Rear Finish: Conductive
Treated Edges: No
Rack Height: 3 U
Rack Width: 21 HP
Height: 128.4 mm
Width: 106.34 mm
Depth: 2.5 mm
Package Quantity: 5

## ADDITIONAL PRODUCT DETAILS

Front Panel for frame type plug-in unit, shieldable.

Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

Mounting kit to fix front Panel to plug-in unit, handle to bolt on, clip and screw with plastic sleeve for mounting plug-in unit in subrack or case are included in the item 'Mounting kit for five plug-in units', part number 24812-100.

## CERTIFICATIONS



#### North America

All locations +1.763.422.2661 Chat with us: schroff.nvent.com

#### Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

nVent.com

#### Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

#### Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

nVent reserves the right to change specifications without notice.