
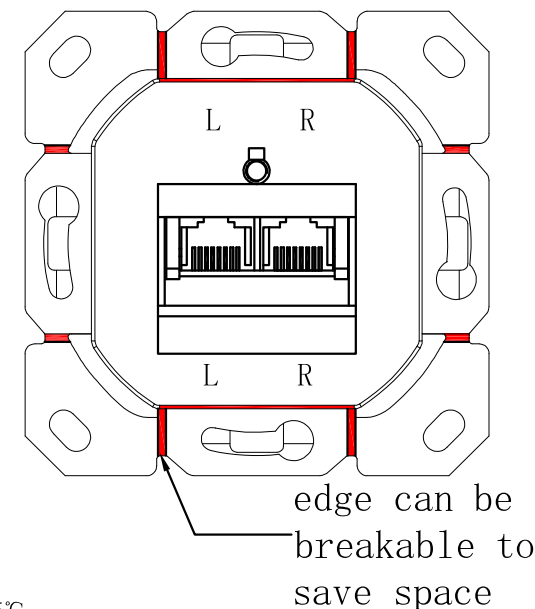
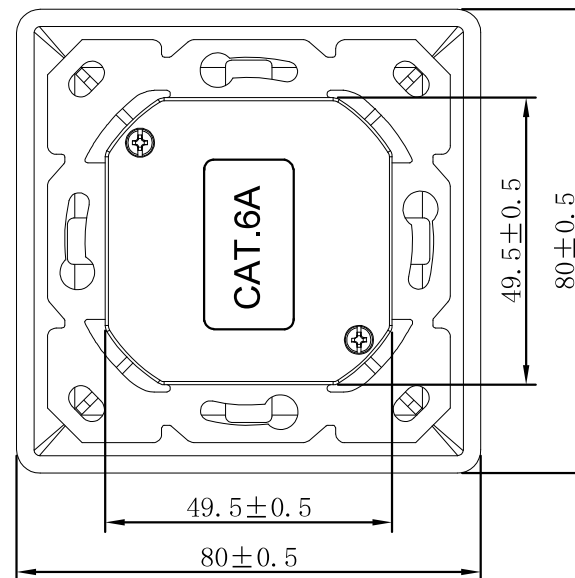
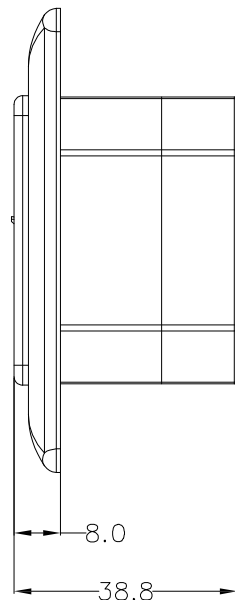
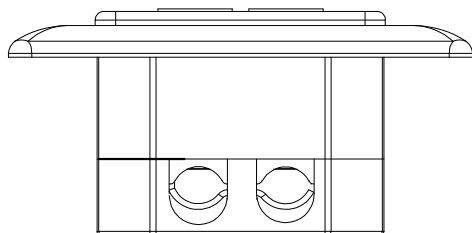


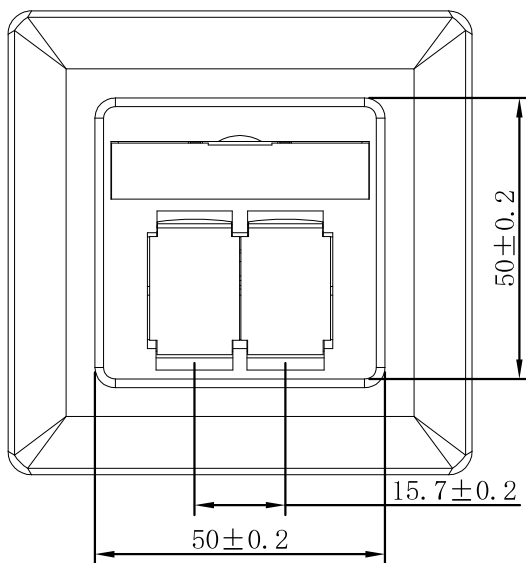

NOTE:

ELECTRICAL:

1. VOLTAGE RATING : 125V AC RMS
2. CURRENT RATING : 1.5A mp
3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
- CAT.6 PERMANENT LINK : CONFORM TO ANSI/TIA 568.2-D IEC 11801 PL CLASS E

Accessory:

1. Instruction Sheet 1pcs
2. SCRW M3.5*27MM 2PCS
3. CABLE TIE 1.8*78MM 2PCS

RoHS AND REACH Compliant

PACKING: 1PCS/INNER CARTON

Designable

Suitable for central plate of the Germany Company Busch
Jaeger and Jung

ENVIRONMENTAL:

1. STORAGE temperature : -40℃ TO +85℃
 2. OPERATION temperature : 0℃ TO +70℃
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL

1. COVER&SHUTTER: ABS
2. JACK HOUSING : PBT+15%GF
3. PCB : FR-4 THINKNESS:1.6MM
4. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35MM 8P8C 3u"Gold Plated
5. IDC CONTACT : PHOSPHOR BRONZE T=0.50MM WITH NICKEL PLATING
6. MOUNTING BRACKET: ZINC ALLOY#3
7. TOP COVER : ZINC ALLOY#3
8. RJ45 JACK LIFE: 750 TIMES MIN
9. IDN LIFE : 200 TIMES MIN
10. WIRE : AWG 22/1-26/1(1/0.4-1/0.63mm),
AWG 24/7-26/7(7/0.20-7/0.16mm)
11. IDC BODY :Krone Type PC/ABS/With Colour Coded Printing T568A/B
12. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s
13. Support PoE per IEEE 802.3af,PoE+ per IEEE 802.3at,

25.99.8491	VALUE CAT.6A WALL OUTLET vertical cable entry
ITEM NO.	DESC.

SECOMP

		NEW	2025-07-15	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.