

LAN QUICKER CABLE TESTER.

User's Guide




►INTRODUCTION:

- The LAN Quicker is designed to check and troubleshoot the pin connections of RJ45 cables. It is ideal for testing the continuity of each pin of LAN cable prior to installation on equipments.

►FEATURES:

- Can Test RJ45/UTP, RJ45/STP cabling
- OPEN, SHORT and CROSS test function
- Full LED indication Lights
- Beep sound warning
- Step/Auto Select function
- Low Battery indication
- Auto Power Off
- Very small size which means it is very to carry
- Carry case included
- Ideal for SOHO LAN installation
- LED indicator on both main unit and remote unit



LED	LED Name	Connector PIN
1	S	Shield
2	1	1
3	2	2
4	3	3
5	4	4
6	5	5
7	6	6
8	7	7
9	8	8

- 1 -


►SPECIFICATION:

Port Type : RJ45

Accessories : 9V battery, RJ45/BNC Adapter.

►INSTRUCTIONS FOR OPERATION:

- Install a 9V battery into the master unit which power will supply automatically.
- Connect one end of the cable to the master unit, and the other end to the remote unit.
- Select Step or Auto test .

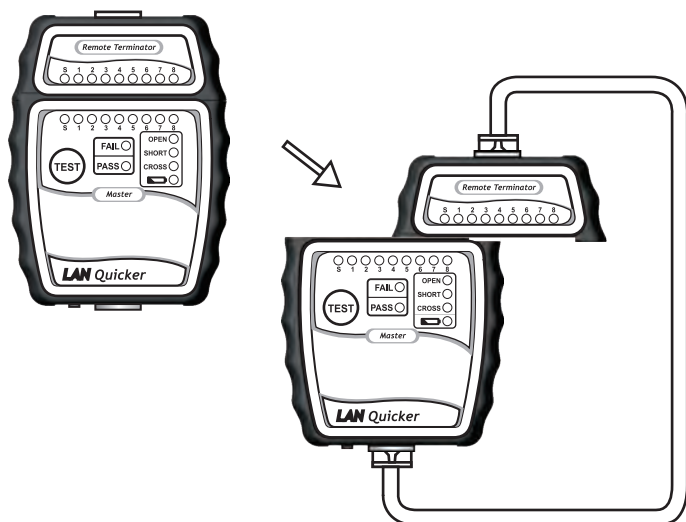


►TEST RESULT:


Step Function:

- Push the Test button each time , can indicate the test result of each cable ,Open , Short , Cross , Fail or Pass will light up.
- Pass : Each Step
RJ45 UTP & STP : Master & Remote Each Step will light up each LED . Result Will beep 3 times

RJ45 UTP Pass




RJ45 STP Pass




☀ Light
○ Unlight

- BNC(7,8) : Each Step 1 ~ 6 will beep 1 time , Master LED Light up , Remote LED Unlit , 7,8 Master & Remote will light up . Result Will beep 1 time
- RJ12 : Each Step 1 & 8 will beep 1 time , Master LED Light up , Remote LED Unlit , 2 ~ 7 Master & Remote will light up . Result Will beep 1 time

BNC (7,8) Pass



RJ12 Pass



☀ Light
○ Unlight

- 2 -

- 3 -