



SPECIFICATION: (1P*#30TC+D+FAM)*4C*#28TC*1P*#28TC*3C+ADB(AL/MG BRAID), MOLD TYPE, BLACKPVC6.0±0.2mm

ITEM	SPECIFICATION		
CONDUCTOR	AWG	30 AWG	28AWG
	MATERIAL	TC	TC
	COND. SIZE	1/0.23TC±0.01mm	1/0.25TC±0.01mm
INSULATION	MIN. AVG. THICK	0.20mm	0.10mm
	MATERIAL	PM-PE-SKIN	PE
	OD	0.6±0.05mm	0.6±0.05mm
TWISTED PAIR	AWG	30 AWG	
	MATERIAL	TC	
	COND. SIZE	(1/0.23TC±0.01mm)*2+(1/0.23TC±0.01mm)*1	
SPREAD AL. FOIL	SIZE	8mm	
	COVERAGE	125%	
MYLAR	SIZE	14mm	
	COVERAGE	125%	
DRAIN	MATERIAL	BC	
	SIZE	7/0.109C±0.01mm	
BRAID	MATERIAL	AL-MG ALLOY	
	SIZE	8*16/0.12±0.01mm	
	COVERAGE	85%	
JACKET	MATERIAL	BLACK PVC	
	COLOUR	BLACK	
	OD	6.0±0.2mm	

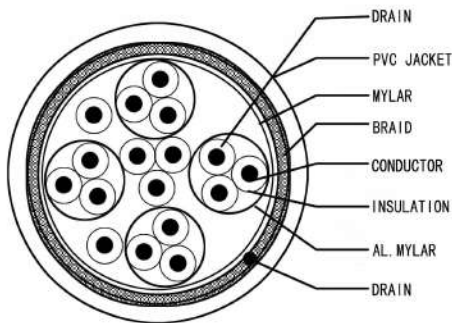

ELECTRICAL: HDTV-DVD TEST: 1080P

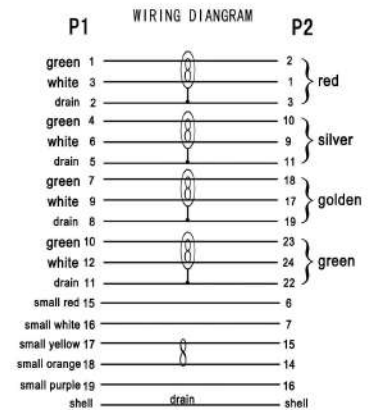

SECOMP

CHECKED: Zhang Guo Yu

CUSTOMER:

MODEL NO.: 11.99.5519(1M)

APPROVED: Liu Wen Jun

DESIGN: Liu Ting Feng

11.99.5522(2M)

11.99.5532(3M)

VALUE Monitor Cable, DVI (18+1) M - HDMI M

DRAWING: Zhuang Qing Yan

DATE: 2016.7.7

11.99.5552(5M)