



Datenblatt - Fiche technique - Data sheet


**11.88.8878**



ROLINE GOLD USB 3.0 Kabel, USB A - Micro B ST/ST, 0,8 m, Retail Blister

ROLINE GOLD Câble USB 3.0, type A-Micro B, M/M, 0,8 m, Retail Blister

ROLINE GOLD USB 3.0 Cable, Type A M -Micro B M, 0.8 m, Retail Blister

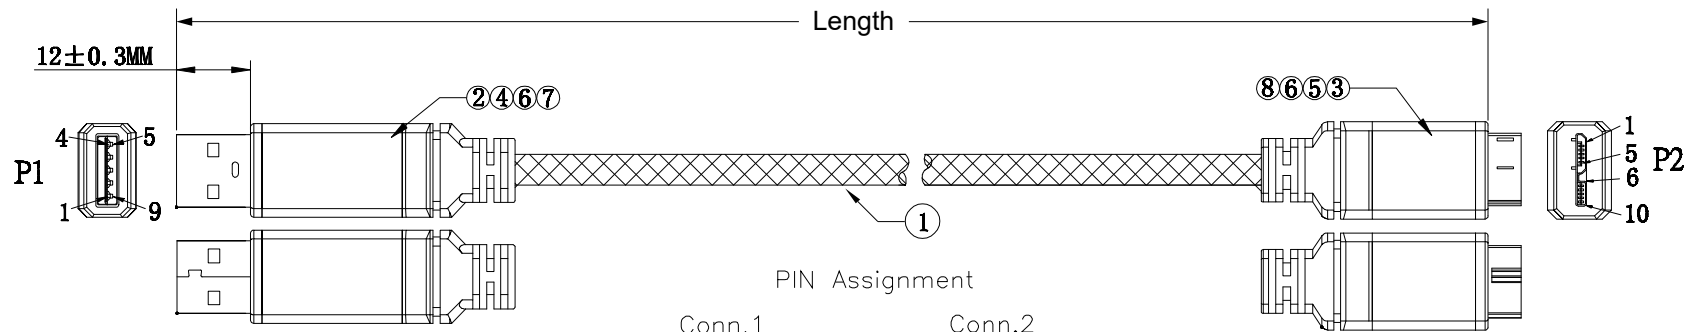

PIN Assignment

Conn.1	Color	Conn.2
1	Red	1
2	White	2
3	Green	3
4	Black	4 NC
5	Orange	6
6	Purple	7
7	Drain Wire	8
8	Drain Wire	9
9	Blue	10
	Yellow	
Shell	Drain Wire	Shell

Specification :

- 1 CA2-3702-001 USB 3.0Cable: UL2725 [(28AWG(7/0.127TC)\*1P+DW+AL/MY)\*2P+28AWG\*2C+24AWG(7/0.2TC)\*2C]+AEB(65% AL) OD:5.5mm; Jacket: Black Color with BraidPEPVC: 45P, Black
- 2 C01-0037 USB 3.0 AM, Insulator: Blue, Pin Gold Plated 3u"
- 3 C01-0035 USB 3.0 Micro BM with Latch, Insulator: Black, Pin Gold Plated 3u", Shell: Gold Plated
- 4 H04-0052 USB 3.0 AM Shell: Gold Plated
- 5 P01-0001 PE
- 6 P01-0000 PVC: 45P, Black
- 7 CM3-0068 USB 3.0 AM Case: Aluminum, Golden Color, L24.2\*W15.9\*H9.1 mm
- 8 CM3-0069 USB 3.0 Micro B Case: Aluminum, Golden Color, L17.4\*W16.0\*H9.43 mm

P./N.	Length
11.02.8878	800 <sup>+20</sup> <sub>-0</sub> mm
11.02.8879	1800 <sup>+20</sup> <sub>-0</sub> mm

REV	DATE	C	NTENTS	F	CHANGE	DESIGNER	TOL ±	Pl	Met	Ins	Por	Cab	Pac	Gas	DIS	APPROVAL	CHECK	DRAWING	DESIGN	DRAWING NAME	ROLINE USB 3.0 AM to Micro B, 28AWG		
①							RANGE									PHILIP	PHILIP		TREE	DATE	PART NO.	11.02.8878 / 11.02.8879	ROO
②							0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2					2016-02-17			
③							6~30	0.1	0.1	.15	.25	1	1	0.5	.25								
④							30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3								
⑤							80~180	.15	.15	.25	0.3	2	2	1	.45								
							180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6								
							315~800	0.2	0.3	0.4	0.5	3	3	2	1.1								
																SCALE	1:1	UNIT	MM				